

DIGITUS KVM Switch, 2-Port, Dual Display, 4K, DisplayPort®

DS-12862
EAN 4016032478133



2 Port Displayport DualView 60 Hz 4K@60fp, Multiplatform support

With the DIGITUS® 2-Port KVM Switch for dual displays, you can operate two 4k-compatible PCs using a single USB keyboard and mouse combination. By pressing a button or hot key, you can switch comfortably between the two PCs and are spared the trouble of replugging all cables. Output on up to two monitors is provided via two DisplayPort® outputs on the rear side. You can also switch between the audio signals for the microphone and speaker. In addition, a USB port is included on the front side for use with other peripheral devices like USB sticks or external hard drives on both PCs. The connected peripheral devices are each assigned to the active PC. Status LEDs on the front side of the switch show you the current configuration at all times. The slim switch features the added benefits of sturdy metal housing.

Operate 2 PCs with dual display using a USB keyboard and mouse combination – switch between two computers by pressing a button

- UHD resolution: 4K / 60 Hz (3840 x 2160p) / Subsampling: YUV 4:4:4
- Inputs: 4 x DP® inputs (2x2), 2 x USB B, 2 x Audio combo socket 3.5 mm jack (microphone, speaker)







- Outputs (console): 2 x DP®, 2 x USB A (mouse, keyboard), 2 x Stereo audio 3.5 m jack (microphone, speaker)
- Additional connection on the front side: 1 x USB A for additional peripheral equipment such as printers or USB sticks
- USB specifications: USB 2.0 compliant (full speed)
- Supported audio formats: Dolby True HD, DTS HD Master Audio
- Switching between the PCs: Switch on the front side or hot keys
- Status LED on front side shows current configuration
- The device is platform-independent, suitable for all operating systems
- Operating temperature: 0 °C to 80 °C
- Storage temperature: -20 °C to +60 °C
- Operating humidity: 0% - 80% RH (non-condensing)
- Case material: Metal
- Power supply device: USB power supply or optional 9 V DC power adapter (300 mA, 5.5x2.1 mm plug)
- Dimensions: 13.2 x 9.2 x 6.6 cm (WxDxH)
- Weight: 580 g

Package contents

- 1 x KVM Switch, 2-Port, Dual Display, 4K, DisplayPort
- 2 x DisplayPort® cable
- 2 x KVM cable (DisplayPort, USB, Audio)
- 1 x Instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	18.20	39.50	45.00	45.00	79,987.50
Packaging Unit Inside	1	1.82	21.00	21.00	12.00	5,292.00
Packaging Unit Single	1	1.82	21.00	21.00	12.00	5,292.00
Net single without Packaging	1	1.56	21.00	21.00	12.00	5,292.00

More images:

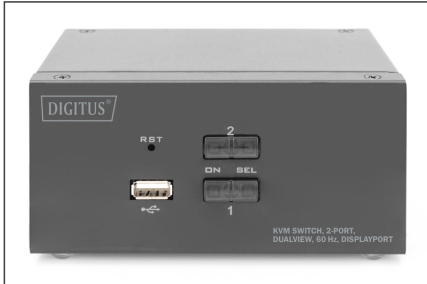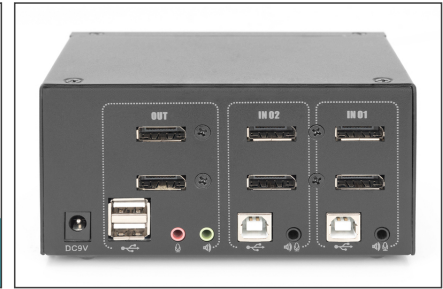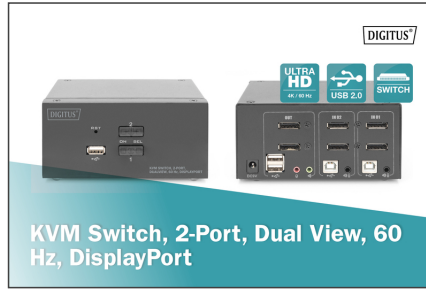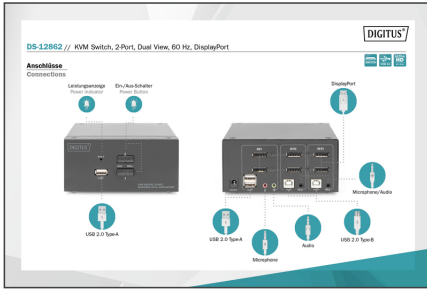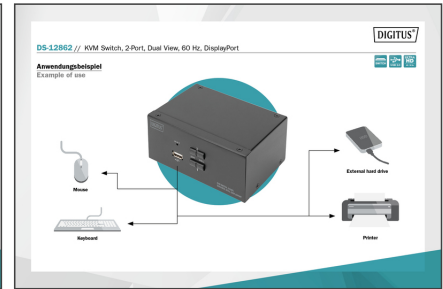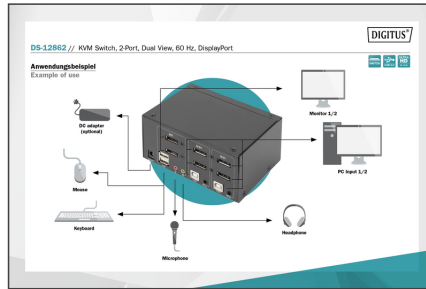

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Cables](#) / [Video Cables](#) / [RCA Cables](#) category:

Click to view products by [Digitus](#) manufacturer:

Other Similar products are found below :

[1-3737-600-3216](#) [LF3BLX](#) [30-513](#) [28-511-0](#) [RCA05RCAB](#) [427493000-3](#) [49152A-010-S2](#) [32-3766](#) [32HR07284X](#) [CAB-LFH-V16A16S0](#)
[DB25M02XLRMXLRFY](#) [426052000-3](#) [LF1BKX](#) [TT746](#) [CA-MINIDP-DVIM-6FT](#) [CA-MINIDP-DVIM-3FT](#) [CA-MINIDP-DVIM-10FT](#)
[CA-MINIDP-VGAF-3FT](#) [CA-MINIDP-HDMIF-6FT](#) [MDC8P53](#) [LF10GNX](#) [427492100-3](#) [LF4BLX](#) [cab-DP to HDMI Passive](#) [VGA CABLE](#)
[DISPLAYPORT TO VGA CABLE](#) [TT3GNX](#) [1700021831-01](#) [Audio Cable](#) [427491690-3](#) [427528000-3](#) [TT2PX](#) [SPEAKER CABLE](#)
[L=300mm](#) [Speaker cable](#) [594E3412000E](#) [32007-005500-200-RS](#) [BCLBH](#) [BANHF](#) [BAPHG](#) [COQBI](#) [COQBG](#) [COEHG](#) [COJBI](#) [DAEBK](#)
[51771](#) [39448](#) [VAB-S04-L](#) [VAS-A13-B200](#) [VAS-A13-B300](#) [KABADA USBC/JACK OEM-C11](#)