


■ **Features**

- Glass passivated junction chip
- Ideal for automated placement
- Super Fast reverse recovery time
- Comply with RoHS standard, halogen-free

■ **Mechanical Data**

- package:SMB/DO-214AA
- Polarity: Indicated by cathode band
- Epoxy: UL 94V-0 rate flame retardant
- Mounting Position : Any

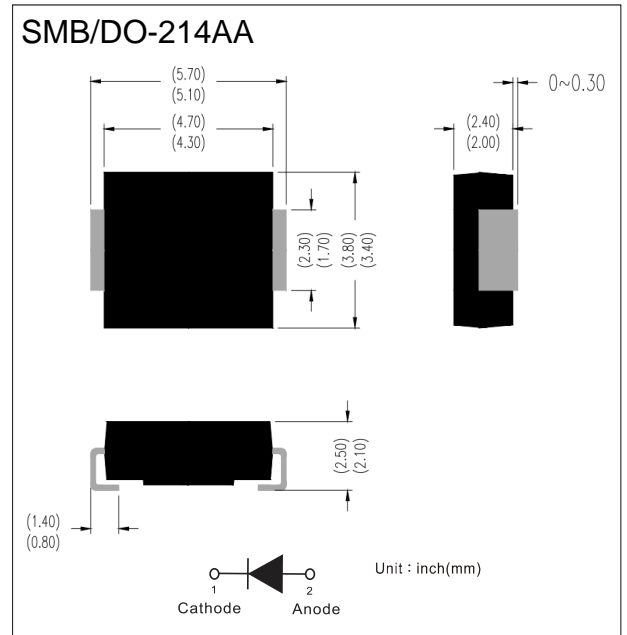

■ **Absolute Maximum Ratings($T_A=25^{\circ}\text{C}$ unless otherwise noted)**

PARAMETER	SYMBOL	UNIT	MURS120	MURS140	MURS160
Maximum Repetitive Peak Reverse Voltage	VRRM	V	200	400	600
Maximum RMS Voltage	VRMS	V	140	280	420
Maximum DC blocking Voltage	VDC	V	200	400	600
Average rectified output current @60Hz sine wave, resistance load, TL (Fig.1)	I_O	A	1.0		
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, $T_j=25^{\circ}\text{C}$	I_{FSM}	A	30		
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, $T_j=25^{\circ}\text{C}$			60		
Current squared time @1ms $\leq t \leq 8.3$ ms $T_j=25^{\circ}\text{C}$	I^2t	A ² s	3.735		
Storage temperature	T_{stg}	$^{\circ}\text{C}$	-55 ~ +150		
Junction temperature	T_j	$^{\circ}\text{C}$	-55 ~ +150		

Thermal Performance($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	UNIT	MURS120	MURS140	MURS160
Typical Thermal resistance	$R_{\theta J-A}^{(1)}$	$^\circ\text{C/W}$	65		
	$R_{\theta J-L}^{(1)}$		20		
	$R_{\theta J-C}^{(1)}$		18		

Note:

(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.3" x 0.3" (8.0 mm x 8.0 mm) copper pad areas

Electrical Specifications($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	MURS120	MURS140	MURS160
Maximum instantaneous forward voltage	V_F	V	$I_{FM}=1.0\text{A}$	0.92	1.25	
Maximum reverse recovery time	t_{rr}	ns	$I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$	25	50	
Maximum DC reverse current at rated DC blocking voltage	I_R	μA	$T_j=25^\circ\text{C}$	5.0		
			$T_j=125^\circ\text{C}$	50		
Typical junction capacitance	C_j	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	17	15	14

Characteristics
MURS120

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Reverse Recovery Time	T_{RR}	ns	$T_j=25^\circ\text{C}$	$I_F=1\text{A}, di/dt=-50\text{A}/\mu\text{s}$ $V_{RM}=30\text{V}$	-	26	-
			$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A}/\mu\text{s}$ $V_{RM}=100\text{V}$	-	18	-
			$T_j=125^\circ\text{C}$		-	23	-
Peak recovery current	I_{RRM}	A	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A}/\mu\text{s}$ $V_{RM}=100\text{V}$	-	2.3	-
			$T_j=125^\circ\text{C}$		-	3.8	-
Reverse recovery charge	Q_{rr}	nC	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A}/\mu\text{s}$ $V_{RM}=100\text{V}$	-	20.2	-
			$T_j=125^\circ\text{C}$		-	43.7	-
Non-repetitive avalanche energy	E_{AS}	mJ	$T_j=25^\circ\text{C}$	$I_R=1.5\text{A}, L=15\text{mH}$	16.9	-	-

▪ MURS140

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Reverse Recovery Time	T_{RR}	ns	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$, $di/dt=-50\text{A/us}$ $V_{RM}=30\text{V}$	-	26	-
			$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A/us}$ $V_{RM}=200\text{V}$	-	22	-
			$T_j=125^\circ\text{C}$		-	31	-
Peak recovery current	I_{RRM}	A	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A/us}$ $V_{RM}=200\text{V}$	-	1.9	-
			$T_j=125^\circ\text{C}$		-	3.5	-
Reverse recovery charge	Q _{rr}	nC	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A/us}$ $V_{RM}=200\text{V}$	-	21.1	-
			$T_j=125^\circ\text{C}$		-	54.9	-
Non-repetitive avalanche energy	EAS	mJ	$T_j=25^\circ\text{C}$	$I_R=0.4\text{A}$, $L=15\text{ mH}$	1.2	-	-

▪ MURS160

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Reverse Recovery Time	T_{RR}	ns	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$, $di/dt=-50\text{A/us}$ $V_{RM}=30\text{V}$	-	49	-
			$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A/us}$ $V_{RM}=400\text{V}$	-	38	-
			$T_j=125^\circ\text{C}$		-	59	-
Peak recovery current	I_{RRM}	A	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A/us}$ $V_{RM}=400\text{V}$	-	3.5	-
			$T_j=125^\circ\text{C}$		-	5.5	-
Reverse recovery charge	Q _{rr}	nC	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A/us}$ $V_{RM}=400\text{V}$	-	67.4	-
			$T_j=125^\circ\text{C}$		-	160.5	-
Non-repetitive avalanche energy	EAS	mJ	$T_j=25^\circ\text{C}$	$I_R=0.5\text{A}$, $L=15\text{ mH}$	1.9	-	-



■ Characteristics Curves($T_A=25^{\circ}\text{C}$ unless otherwise noted)

FIG.1: I_o -TL Curve

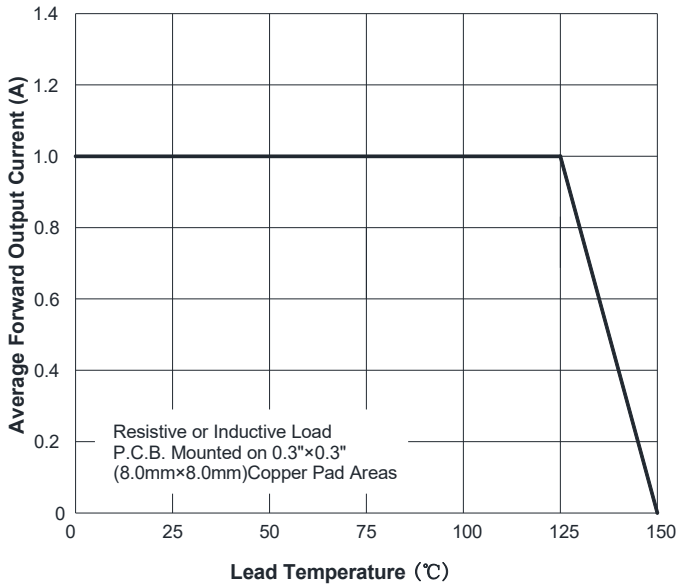


FIG.2: Forward Surge Current Capacity

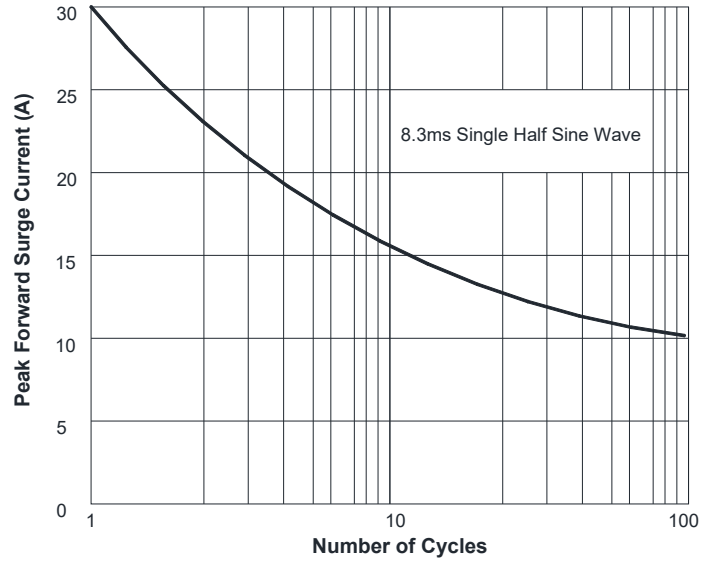


FIG.3: Typical Forward Voltage

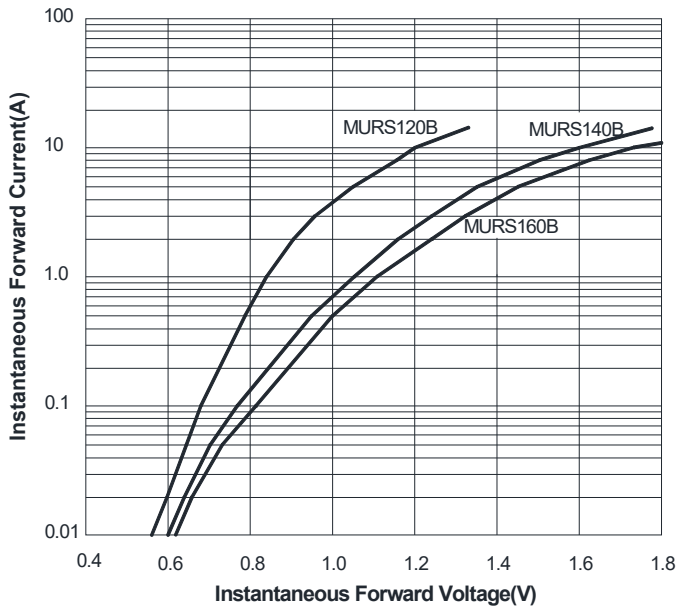


FIG.4: Typical Reverse Characteristics


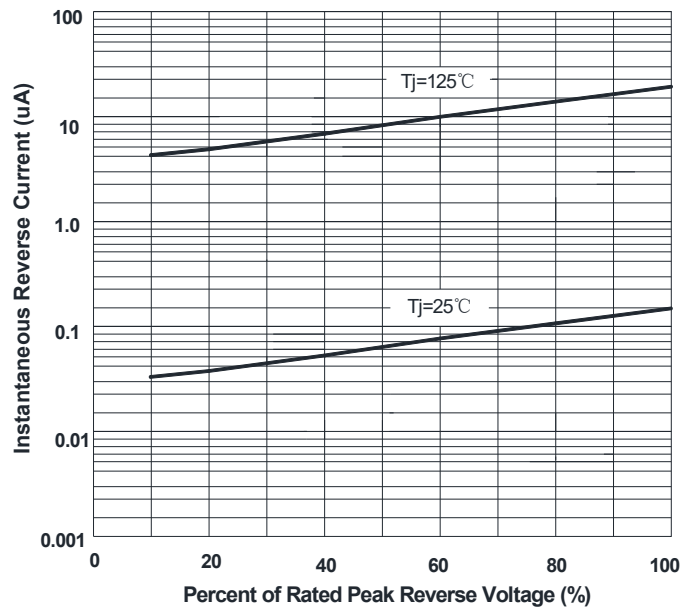




FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

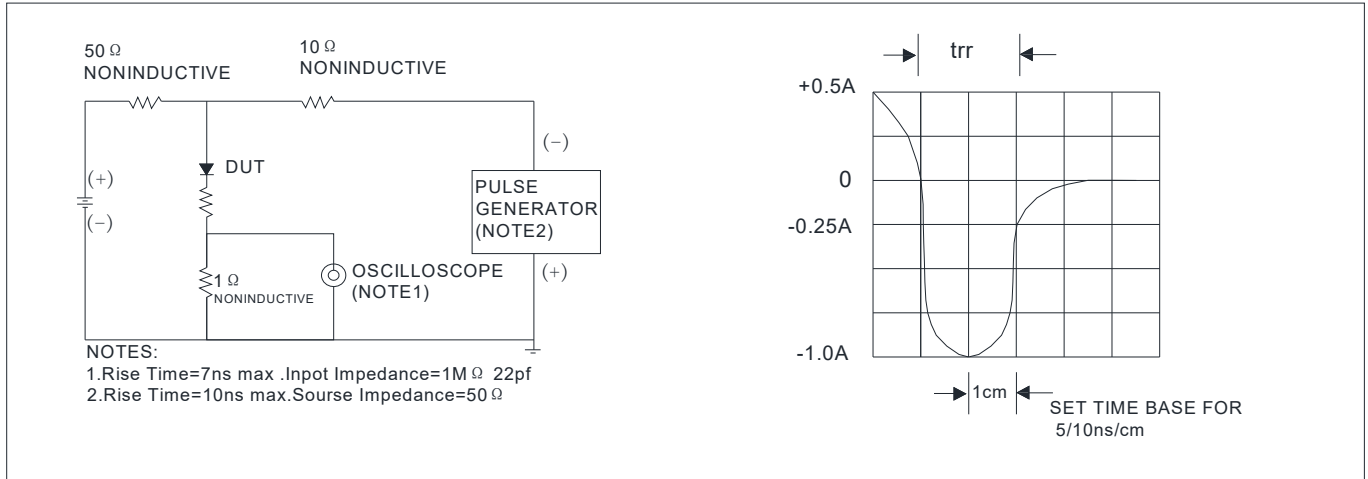

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [DOWO](#) manufacturer:

Other Similar products are found below :

[70HFR40](#) [FR105 R0](#) [RL252-TP](#) [1N5397](#) [1N4005-TR](#) [1N4007-BP](#) [UFS120Je3/TR13](#) [20ETS12S](#) [RRE02VS6SGTR](#) [MS306](#) [A1N5404G-G](#)
[CRF02\(T5L,TEMQ\)](#) [ACGRB207-HF](#) [CLH07\(TE16L,Q\)](#) [CLH03\(TE16L,Q\)](#) [1N5395-TP](#) [UES1302](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [DZ-](#)
[1380](#) [85HFR60](#) [40HFR60](#) [70HF120](#) [85HFR80](#) [SCF7500](#) [SM100](#) [ACGRA4001-HF](#) [SKN70/08](#) [NTE5819](#) [NTE5827](#) [NTE5828](#) [NTE5911](#)
[NTE5915](#) [NTE6104](#) [NTE6163](#) [NTE6164](#) [NTE6165](#) [NTE6364](#) [TSD3G](#) [SET130312](#) [NRVUS110VT3G](#) [UES1106](#) [UES1306](#)
[NRVUS240VT3G](#) [D5FE60-5063](#) [R4000GPS-TP](#) [D4015L56TP](#) [UES1306HR2](#) [FX20K120](#) [D20XB60-7101](#)