Effective May 2016 Supersedes August 2002

Rejection base plug fuses – dual-element, time-delay 125 volt, up to 30 amps



Catalog symbol:

- S (amps)
- BP/S (amps)

Description:

Bussmann[®] series dual-element, time-delay rejection base plug fuse.

Specifications:

Ratings


- Volts 125 Vac or less
- Amps 1/4 to 30 A
- Interrupting rating 10 kA RMS Sym

Agency Information

- UL[®] Listed (up to 6-1/4 A), Std. 248-11, Guide JFHR, File E56412, (7 to 30 A) Guide JEFV, File E12112
- CSA[®] Certified, Class 1423-01, File 53787
- CE

Edison base adaptors

Adaptor	Accepts fuses	Adaptor	Accepts fuses
SA-1	S-1 or smaller	SA-5	S-5 to S-3-1/2
SA-1-1/4	S-1-1/4 or smaller	SA-6-1/4	S-6-1/4 to S-3-1/2
SA-1-6/10	S-1-6/10 or smaller	SA-8	S-8 to S-7
SA-2	S-2 or S-1-8/10	SA-10	S-10 to S-7
SA-2-1/2	S-2-1/2 to S-1-8/10	SA-15	S-15 to S-7
SA-3-2/10	S-3-2/10 to S-1-8/10	SA-20	S-20
SA-4	S-4 to S-3-1/2	SA-30	S-30 to S-20



BUSSMANN

Package quantity and weight


	Quan	Quantity		Weight	
Amp ratings	Per box	Per card	Per box	Per 5 cards	
1/4 to 14 A	4	1	0.24	0.43	
15 to 30 A	4	2	0.24	0.68	



Features:

- · Heavy duty, dual-element, time-delay rejection base fuse
- Use to protect critical motor circuits or motors that cycle on/ off frequently
- Features non-interchangeable body
- An industrial/commerical grade product with dual-element construction
- These fuses thread into SA adaptors
- Industrial strength, featuring exclusive dual-element construction
- This spring loaded design provides superior short circuit and overload protection
- More time-delay than the medium duty Type SL fuses in order to better protect industrial motors and critical residential circuits

Time-current curve – average melt

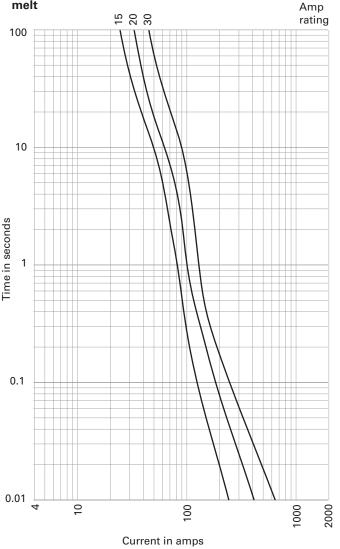

The only controlled copy of this Data Sheet is the electronic read-only version located on the Eaton Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton 1000 Eaton Boulevard Cleveland, OH 44122 United States Eaton.com

Bussmann Division 114 Old State Road Ellisville, MO 63021 United States Eaton.com/bussmannseries

Powerina Business Worldwide

© 2016 Eaton All Rights Reserved Printed in USA Publication No. 1032 – SB02374 May 2016 Eaton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group. UL is a registered trademark of the Underwriters Laboratories, Inc. For Eaton's Bussmann series product information, call **1-855-287-7626** or visit: **Eaton.com/bussmannseries**

Follow us on social media to get the latest product and support information.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Specialty Fuses category:

Click to view products by Eaton manufacturer:

Other Similar products are found below :

63NZ02GL 714125 722134 F02A-4AS F02B-1A 80NH00GR-6 FWH-200A FWP-32A14F 12LCT 12TDLSJ63 REN-3 15.5CAVH2E ECF-1 ECF-2 ECF-3 ECF-4 170M0213 170M1369-D 170M3809D BK/F02B-1A N-2-1/2 N-3-2/10 NITD2 20D16 KAA-3 KAB-30 KAW-3 2D16 LKN-125B 16D27SB 16FC 170M1564D 170M2616 170M2668 170M4161 170M4241 170M4699 ESD63 ABS-30 ABS-8 ACF-15 ACF-30 ACO-30 F02A-10A SSD10 200NH1M FWP-25A14FI FWP-40A14FI FWP-500A FWP-63A22FI