BUSSMANN SERIES

ATM blade fuses



Catalog symbol

ATM-_

Description

A range of UL® Listed fast-acting miniature blade fuses for automotive and low-voltage circuits.

Ratings

Volts: 32 Vac/dcAmps: 2 to 30 A

· Interrupting rating: 1 kA



Agency information

- UL Listed, Guide FHXT, File AU169
- ISO 8820-3 / JASO D612 / SAE J2077 and J1171 ignition protection



Materials

- · Silver-plated zinc terminals and element
- Polyamide housing with UL 94 HB flammability rating

Environmental

- Operating temperature range -40°C to +80°C, 95% RH non-condensing
- Storage temperature range -5°C to +35°C or lower, 85% RH non-condensing

Basic catalog numbers

Cat. no. (amp)	Color code	Cat. no. (amp)	Color code
ATM-1*	Black	ATM-10	Red
ATM-2	Gray	ATM-15	Blue
ATM-3	Violet	ATM-20	Yellow
ATM-4	Pink	ATM-25	Clear
ATM-5	Tan	ATM-30	Green
ATM-7-1/2	Brown		


^{*} Available only in traditional and bulk pack.

Packaging codes

Package type	Cat. no. configuration	Contents
Traditional	ATM-(amp)	5 fuses in a tin
Reload	ATM-(amp)RLD*	10 fuses in a polybag
Retail pack	BP/ATM-(amp)-RP	5 fuses in a blister card
Value pack	VP/ATM-(amp)-RP	25 fuses in a clamshell pack
Bulk pack	BK/ATM-(amp)	500 fuses in a carton

^{*} Not available for the 4 amp ATM fuses.

Dimensions — in



Operating @ 23°C*

% of fuse amp rating	Min	Max
110%	100 hrs	_
135%	0.75 sec	600 sec
160%	0.25 sec	50.0 sec
200%	0.15 sec	5.0 sec
350%	0.04 sec	0.5 sec
600%	0.02 sec	0.1 sec

^{*} Fuse characteristics may vary according to the conditions under which they are used. Fuse derating with change in ambient temperature: -0.15% / 1°C.

Features

- · Halogen free and RoHS compliant
- Test points on fuse housing speeds troubleshooting
- · Industry standard color coded by amp rating

Typical applications

- Automotive
- · Low voltage control circuits


Recommended fuse holders, add-a-circuit and fuseclips

Part		Max volts/	
number	Description	amps	Leadwire
ННН	Add-a-circuit for additional fused circuit on a block	32V/10A	5"/#16
HHL	Inline fuse holder with cover	32V/20A	2x4"/#16
ННМ	Inline fuse holder with cover	32V/30A	2x4"/#12
HHU	Water resistant inline fuse holder with cover	32V/30A	2×4"/#12
ATM-FHID	Indicating inline fuse holder with cover	32V/20A	2x4"/#16
1A5778**	PCB fuse clip	32V/15A	_
1A5779**	PCB fuse clip with nylon base	32V/15A	_

^{**} See data sheet no. 2131 for details.




Time-current characteristic curves — average melt

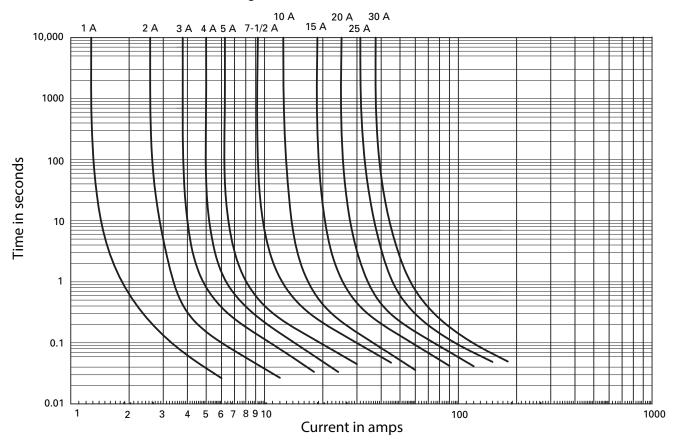

Electrical characteristics

175 mV 140 mV
140 mV
140 mV
136 mV
112 mV
112 mV
106 mV
99 mV
95 mV
92 mV
86 mV

Temperature rerating curve



The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton 1000 Eaton Boulevard Cleveland, OH 44122 Eaton.com

Bussmann Division 114 Old State Road Ellisville, MO 63021 United States Eaton.com/bussmannseries

© 2021 Eaton All Rights Reserved Printed in USA Publication No. 2048 — BU-SB15054 May 2021

Faton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

For Eaton's Bussmann series product information, call 1-855-287-7626 or visit: Eaton.com/bussmannseries

Follow us on social media to get the latest product and support information.













X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fuse Holder category:

Click to view products by Eaton manufacturer:

Other Similar products are found below:

570-290-741P40 570-290-751P40 020417G 020418E 6R30A1B F600A3B 80910030 8601.2020 G15A2SPQ 9-3557-GP REV A HDJ-B R6J30A3S HFH-1 RF30A1S RF30A2B RF30A3SP 15600-08-10 BK/FHN19G BK/HHM BK/HKP-CCHH BK/HKP-JJ BK/HTJ-LES-FUSE HMG-241 HTJ-LES-FUSE C4044-1 2086-1 2193 2602 2650 178.000100 FHN31G1 T30A2B G4PB8 2660 2799 CQ-209V HKP-CCHH R6F30A2S 341001A 345621A CVRMCC 4202 4407 4408 4413 4423 4532 4537 TSD1404-12 BK/FHN31G1