

Limitron™ KLU Class L 600Vac, 601-4000A, time-delay fuses





Catalog symbol:

· KLU-(amp)

Description:

Bussmann® series Advanced protection KLU Class L time-delay, current-limiting fuses. Time-delay – 5 seconds (minimum) at 500% of rated current.

Specifications:

Ratings

Volts 600Vac

Amps 601-4000A*

IR 200kA Vac RMS Sym.

 st Use KRP-CL for ratings from 225 to 600 amps.

Agency infortmation

- UL® Listed, Std. 248-10, Class L, Guide JDDZ, File E4273
- CSA® Certified, C22.2 No. 248.10, Class 1422-02, File 53787
- · CF
- · RoHS compliant

Catalog umbers (amps)		
KLU-1200	KLU-2500	
KLU-1500	KLU-3000	
KLU-1600	KLU-4000	
KLU-1800		
KLU-2000		
	KLU-1200 KLU-1500 KLU-1600 KLU-1800	

Carton quantity:

Amp rating	Carton qty.
601-4000	1

Features:

- Provides 10X better current limitation to help prevent equipment damage caused by shortcircuit events.
- 200kA Interrupting rating complies with NEC® Section 110.9 for today's large capacity systems.
- Fast-acting fuse helps prevent equipment damage caused by short-circuit events.
- Copper links result in a minimum 5-second time-delay at 500% ampere rating.
- Ideal for critical industrial or commercial applications that have specific current limitation requirements.


Recommended fuse blocks — 601 to 1200 amps[†]:

Catalog numbers	Poles
51215	1
51235	3

† No Agency listings available. No reducers available.




Dimensions – in:

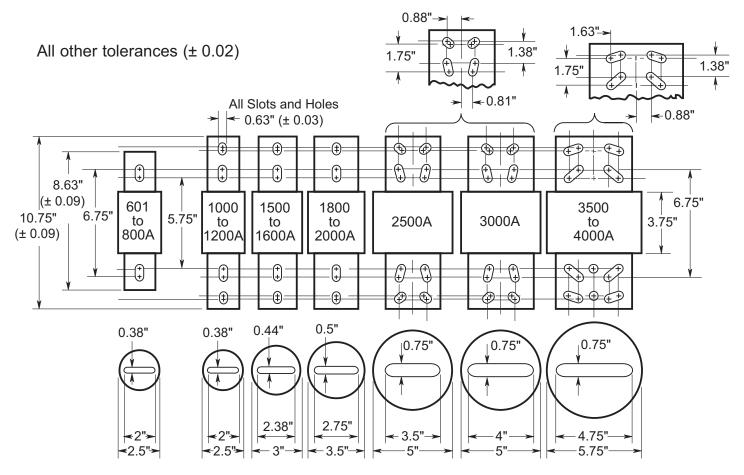


Terminals: Width (± 0.06), Thickness (± 0.03)

Time-current curves - average melt:

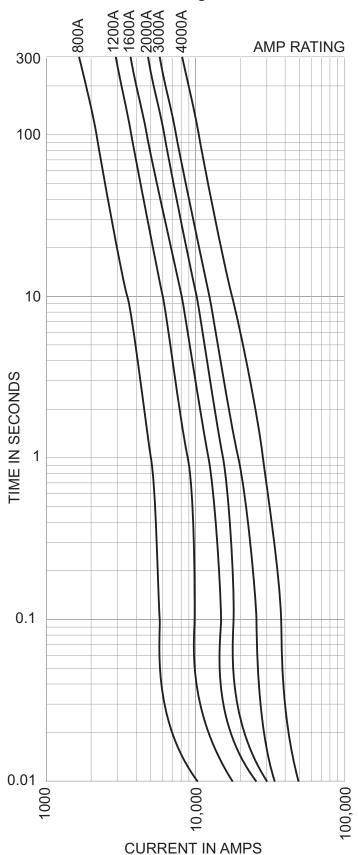

Current-limitation curves:

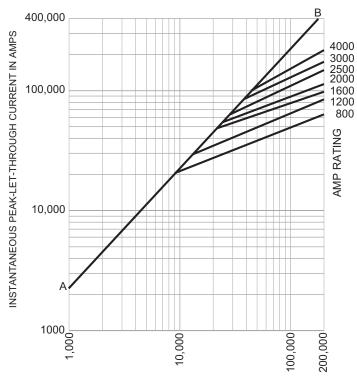

RMS SYMMETRICAL CURRENT IN AMPS
A-B = ASYMMETRICAL AVAILABLE PEAK (2.3 X SYM RMS AMPS)

Technical Data 1013 Effective August 2015

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton 1000 Eaton Boulevard Cleveland, OH 44122 Eaton.com

Bussmann Division 114 Old State Road Ellisville, MO 63021 United States Eaton.com/bussmannseries

© 2016 Eaton All Rights Reserved Printed in USA Publication No. 1013 — BU-SB13724 February 2016

Eaton, Bussmann and Limitron are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group. NEC is a registered trademark of the National Fire Protection Association, Inc. UL is a registered trademark of the Underwriters Laboratories, Inc.

For Eaton's Bussmann series product information, call **1-855-287-7626** or visit: Eaton.com/bussmannseries

latest product and support information.











Follow us on social media to get the

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Industrial & Electrical Fuses category:

Click to view products by Eaton manufacturer:

Other Similar products are found below:

MTH-4 MTH-8 BP/NON-30 NLN2 NLN25 KTN-R-10 LPS-RK-2SP ABU-35 FLSR100 BLF6 KLK003 LPS-RK-100 LPS-RK-15 LPS-RK-20 LPS-RK-70 LPS-RK-90 NLS10 FRN-R-30ID FRS-R-20ID KLK015 CHSF-80 LDFJ350.X FUSE 5A/32V FK-1 381280 384515 381050 491335 492138 004184220 004184223 004184228 004185224 004181214 3050611.0,5 432001 BAF-4 FRN-R-600 MIC-20 BBS-4/10 BBS-3/4 BBS-1/2 C10G32 C10M20 JJN-100 JJN-15 JJN-60L KRP-C-700SP KTK-R-1-1/2 3RU1136-1KB0 LP-CC-12