


3216LV

Fast-acting Line-voltage Chip™ surface mount fuse

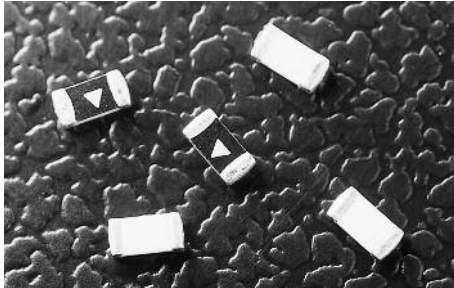

Product features

- Surface mount fuse, fast acting, 125 Vac
- Utilize thick and thin metal film technologies for superior fusing action and enhanced reliability.

Agency information

- UL Recognition Guide & File numbers: JDYX2 & E19180.
- CSA Component Acceptance: 053787 C 000 & Class No: 1422 30

General specifications

- Operating temperature range: -55 °C to +125 °C, with proper derating
- Thermal shock: MIL-STD-202, Method 107, Test Condition B (-65 °C to +125 °C)
- Vibration: MIL-STD-202, Method 204, Test Condition C (55 Hz to 2000 HZ, 10 G)
- Moisture resistance: MIL-STD-202, Method 106, 10 day cycle
- Solderability: ANSI/J-STD-002, Test B, Solder dip and look
- Resistance to solder heat: MIL-STD-202G Method 210F Condition A. (Solder iron + 350 +10 °C, 5s)

Soldering method

- Wave immersion: +260 °C, 10 sec max.
- Infrared reflow: +260 °C, 30 sec max.

Ordering

- Specify packaging prefix and part number (i.e., TR-3216LV1-R)

ELECTRICAL CHARACTERISTICS	
% of Amp Rating	Opening Time
100%	4 hours minimum
250%	5 seconds maximum

SPECIFICATIONS							
Part number	Current rating (A)	Voltage rating Vac/dc	Interrupting rating @ 125 Vac/dc (A)	Typical melting integral @ 10X rated current (A ² sec)		Typical resistance @ ≤ 10% rated current (Ω)	Typical voltage drop @ rated current (V)
				AC	DC		
3216LV250-R	250 mA	125	50	0.00016	0.000084	3.5	1.4
3216LV375-R	375 mA	125	50	0.001	0.0002	1.75	0.73
3216LV500-R	500 mA	125	50	0.0014	0.0019	0.98	0.66
3216LV750-R	750 mA	125	50	0.0033	0.00950	0.54	0.63
3216LV1-R	1	125	50	0.020	0.0084	0.345	0.63
3216LV1.25-R	1.25	125	50	0.035	0.021	0.255	0.62
3216LV1.5-R	1.5	125	50	0.038	0.024	0.165	0.49

Notes:


1. AC interrupting rating (Measured at rated voltage with a unity power factor)
2. DC interrupting rating. (Measured at rated voltage, time constant of less than 50 microseconds, battery source)
3. Voltage drop measured at rated current after temperature stabilizes at 23 ± 3 °C
4. Typical melting I²t (Measured with a battery bank at rated voltage and 50 A current, time constant of calibrated circuit less than 50 microseconds)
5. It is recommended that fuses be mounted with ceramic (white) side facing up
6. Device designed to carry rated current for four hours minimum. An operating current of 80% or less of rated current is recommended, with further derating required at elevated ambient temperatures




Powering Business Worldwide

Dimensions- mm (inches)


Drawing not to scale

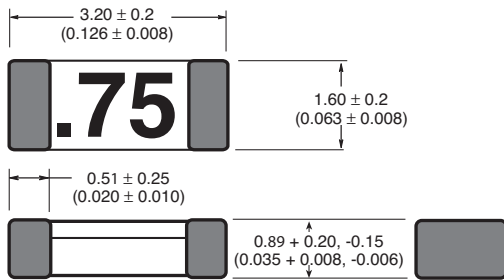

Land pattern- mm (inches)

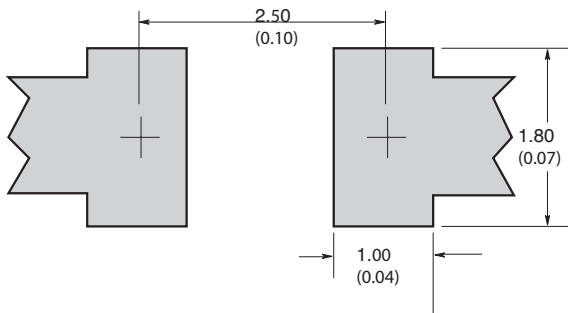

Time current curve

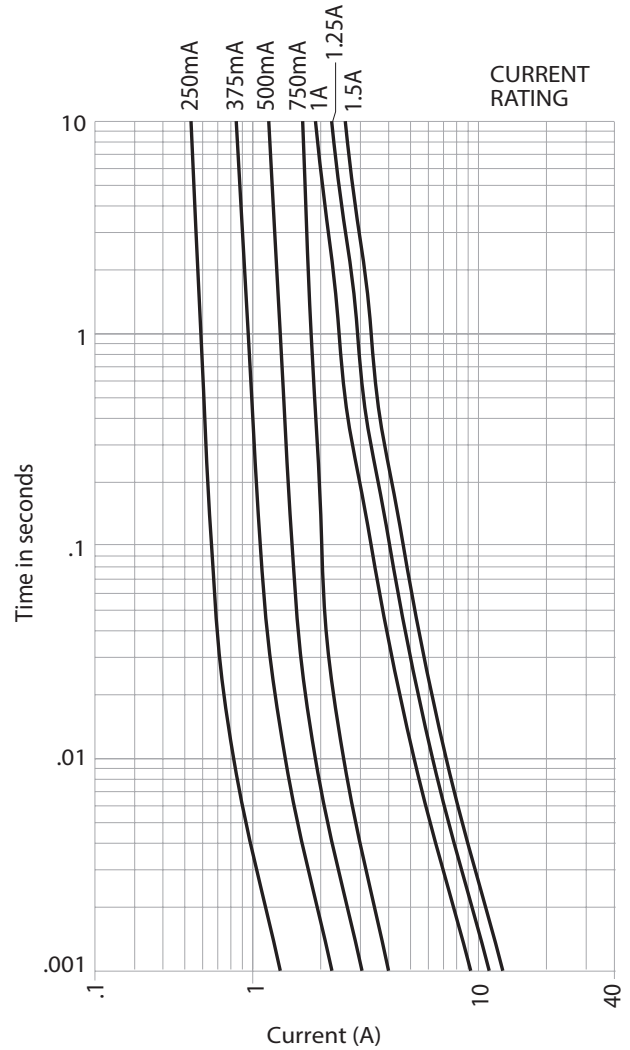

Packaging code	
Packaging code	Description
TR-	3000 fuses on 8 mm tape-and-reel on a 7 inch (178 mm) reel per EIA Standard 481

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2020 Eaton
All Rights Reserved
Printed in USA
Publication No. 2541
August 2020

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [Eaton](#) manufacturer:

Other Similar products are found below :

[FHC20402ADTP](#) [NFVC6125S0R50TRF](#) [SFT-125MA](#) [TF16SN2.00TTD](#) [TF16SN3.15TTD](#) [TR/3216LR-500MA](#) [CCP2B20TTE](#)
[FCC16501ABTP](#) [FHC16322ADTP](#) [0308.250UR](#) [0308.375UR](#) [0308.500UR](#) [030801.5UR](#) [FCC16202ABTP](#) [03081.25UR](#) [F0603G0R03FNTR](#)
[SKY87604-11](#) [3404.0110.22](#) [SEF 0.375A 125V \(G\)](#) [1211015](#) [S1206-F-3.0A](#) [9321315278](#) [S0603-F-4.0A](#) [SMT1315AP](#) [0603TD-4A](#)
[1240FH-30A](#) [R451003.L](#) [R451.500L](#) [R451001.L](#) [3-103-119](#) [3-103-123](#) [3-103-127](#) [0154002.DRL](#) [0154008.DRL](#) [0154.500DRL](#) [189140.1,25](#)
[189140.0,8](#) [189140.0,4](#) [189140.0,63](#) [189140.0,25](#) [0468003.WR](#) [0494001.NRHF](#) [0494002.NRHF](#) [0494003.NRHF](#) [049402.5NRHF](#)
[049403.5NRHF](#) [0494.250NRHF](#) [0494.375NRHF](#) [0494.500NRHF](#) [CF06V3T1R60](#)