

PLUG IN TYPE TERMINAL BLOCK

TÜV R50130520
E133988(R)

ETB86 SERIES

CLAMPING TYPE

PITCH=3.5mm

FEATURES


- Special wire protector design to ensure reliable wire clamping
- Be capable of clamping a wide range of wire diameters
- The Male connector of plug using a twin leaf phosphor bronze contact mates with the Female socket
- The Female socket is mounted and soldered to the P.C.B.
- Good for insertion & withdrawal
- UL 94V-0 grade fire retardant engineering plastic used for the housing

SPECIFICATIONS


- Pitch 3.5mm
- Wire range 28~16 AWG (1.5mm²)
- No. of pole per block 2P to 16P
- Rating 6 Amp, 300 VAC
- Housing PA66
- Wire cage Nickel plated over Zinc Alloy
- Contacts Tin plated over Phosphor bronze
- Screws M2.0x0.4P, Zinc plated over Steel
- Mount screws M2.0x0.4P, Zinc plated over Steel
- Torque 0.25 N-m (2.2 lb-in) (tested by manual torque screwdriver)
- Operating temperature -30°C~+110°C (includes temperature rise limit)
- Stripping length 6mm
- Contact resistance <15mΩ
- UL Approval 300V, 6A, 28~16 AWG
- TUV Approval 130V, 8A Max., 0.2 to 1.0mm²
- Plug in with ETB88



PART NUMBERING SYSTEM

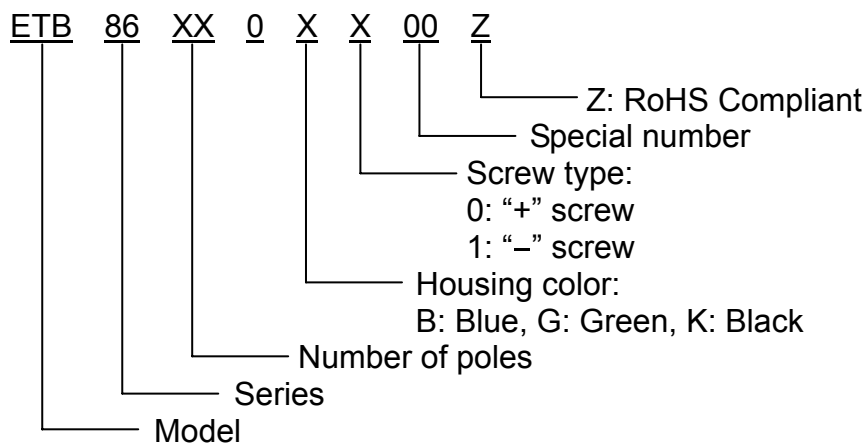

■ DRAWING

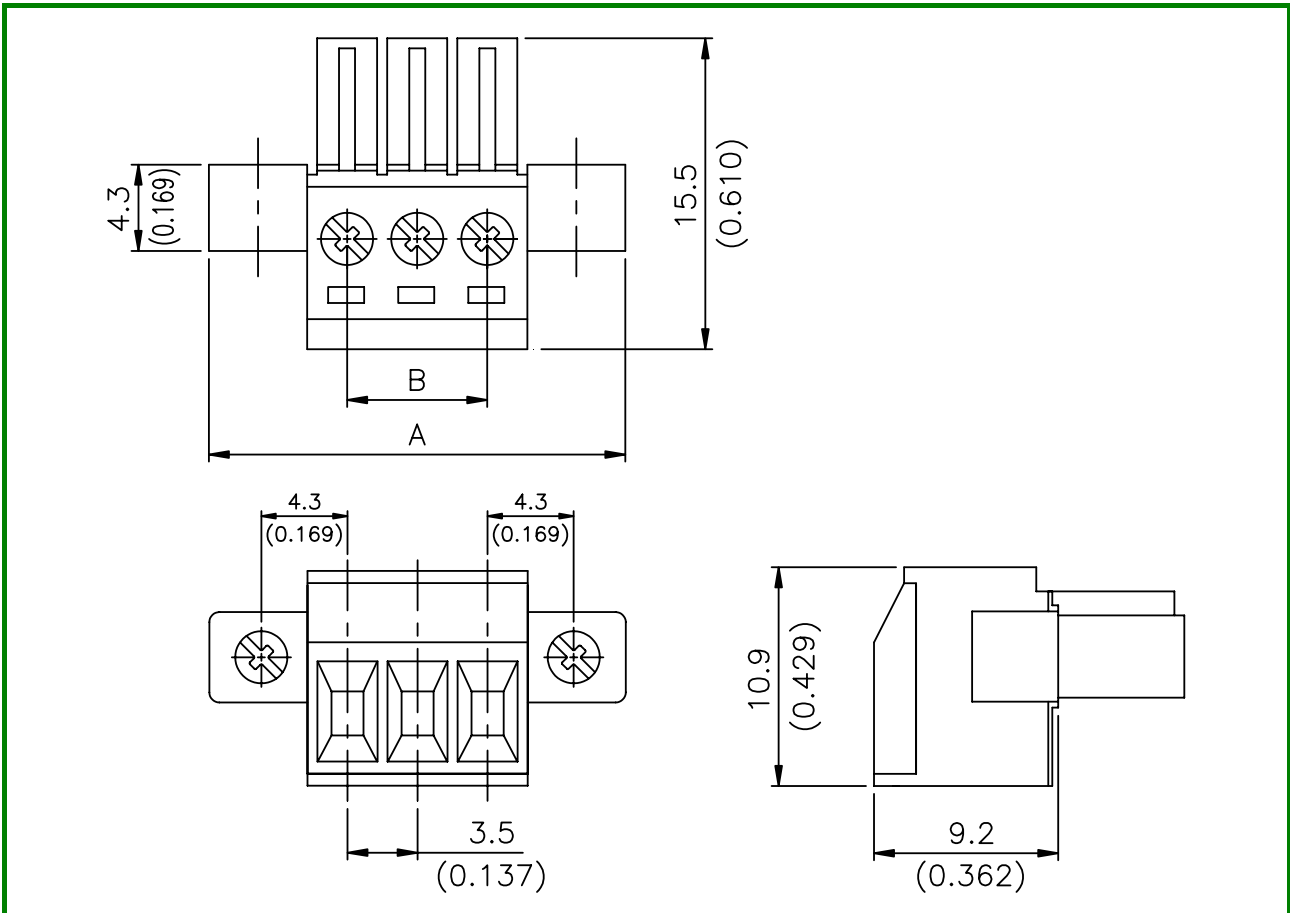

POLE DIM.	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A	17.3 (0.681)	20.8 (0.819)	24.3 (0.957)	27.8 (1.094)	31.3 (1.232)	34.8 (1.370)	38.3 (1.508)	41.8 (1.646)	45.3 (1.783)	48.8 (1.921)	52.3 (2.059)	55.8 (2.197)	59.3 (2.335)	62.8 (2.472)	66.3 (2.610)
B	3.5 (0.138)	7.0 (0.276)	10.5 (0.413)	14.0 (0.551)	17.5 (0.689)	21.0 (0.827)	24.5 (0.965)	28.0 (1.102)	31.5 (1.240)	35.0 (1.378)	38.5 (1.516)	42.0 (1.654)	45.5 (1.792)	49.0 (1.929)	52.5 (2.067)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [ECC manufacturer](#):

Other Similar products are found below :

[57.404.7553](#) [57.504.0053.7](#) [57.510.0053](#) [57.910.6153](#) [01.112.1453](#) [CTB932VE/6](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [734-304](#) [8-141-P](#) [FKCT 2.5/ 3-ST KMGY](#) [860505](#) [860508](#) [860516](#) [860810](#) [861908](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP02-5,00](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [H-10](#) [1546228-5](#) [ELFH09150](#) [ELFH16150](#) [ELFP03110](#) [ELFT06250](#) [ELFT07250](#) [ELVF09400](#) [ELVP03100](#) [ELXH03100](#) [ELXH071G0E](#) [ELXP041G0](#) [ELXT046G0](#) [1700101](#) [1700410](#) [1700425](#) [1703176](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1729386](#) [1734692](#) [1734795](#)