



Plunger Weight : 5g  
 Total Weight : 42g

Shown Energized UNIT : mm

### STROKE Vs FORCE

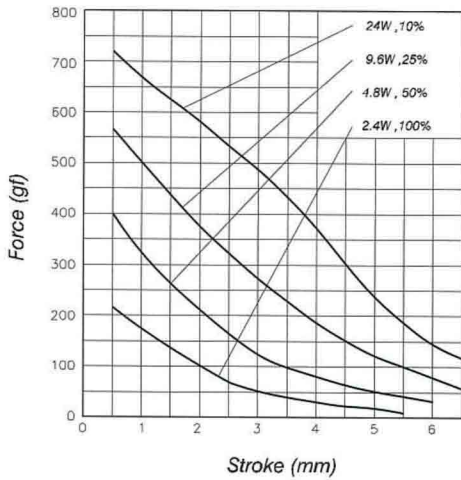

### AMPERE-TURNS Vs FORCE

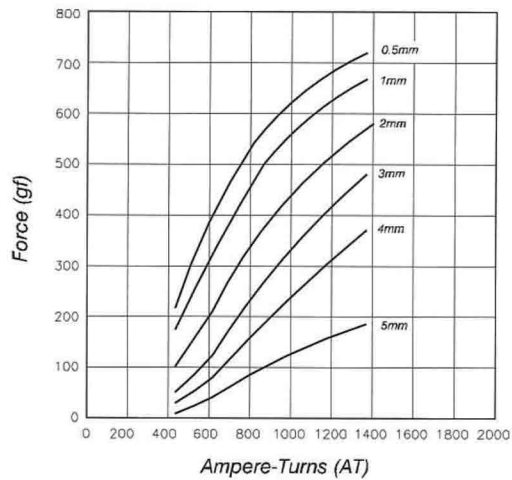

### COIL DATA

$\text{Duty cycle (\%)} = \frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$			Continuous (100%)	Or less (50%)	Or less (25%)	Or less (10%)
$(\%) = \frac{\text{ON}}{\text{ON} + \text{OFF}} \times 100\%$			(100%)	(50%)	(25%)	(10%)
MAX. "on" time in seconds ON			$\infty$	55	19	3
Watts at 20°C (W) 20°C			2.4	4.8	9.6	24
Ampere-turns at 20°C AT 20°C			432	615	864	1368
Type no.	Resistance (20°C) $\Omega \pm 10\%$	No. turns	Volts DC			
	$(\Omega) \pm 10\%$					
EMA-0630L-06	15	1080	6	8.5	12	19
EMA-0630L-12	60	2160	12	17	24	38
EMA-0630L-24	240	4320	24	34	48	76
EMA-0630L-48	960	8640	48	68	96	152

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Solenoids & Actuators category](#):*

*Click to view products by [EMAGGO manufacturer](#):*

Other Similar products are found below :

[7014-S](#) [11-I-24A](#) [11-I-6D](#) [A-1223](#) [11P-C-6D](#) [A-376-T](#) [H-15234-029-20](#) [A420-065512-00](#) [A420-065513-00](#) [A420-065571-00](#) [A420-065710-00](#) [A420-066011-00](#) [A420-066014-00](#) [A420-066083-00](#) [A420-066084-00](#) [A420-066947-00](#) [A420-067877-00](#) [A420-067899-00](#) [A420-068516-00](#) [A421-062507-11](#) [A421-062507-12](#) [A490-367460-13](#) [A490-367460-14](#) [A490-367460-15](#) [A490-367460-17](#) [A490-367461-00](#) [A490-367461-02](#) [A490-367462-03](#) [A490-367462-04](#) [A490-367462-05](#) [A490-367462-07](#) [A-728](#) [1251-A-1](#) [12-C-120A](#) [12-I-120A](#) [129409-031](#) [143-B1A2](#) [1500-M-1](#) [1501-M-1](#) [152099-230](#) [B20-501-A-1](#) [B20-753-A-1](#) [B24-253-A-1](#) [B24-501-A-1](#) [B24-753-A-1](#) [B27-501-A-1](#) [190836-028](#) [195931-028](#) [C15-519-A-14](#) [C33-19-M-33](#)