



N-Channel Logic Level Enhancement Mode Field Effect Transistor

Product Summary:

BV _{DSS}	30V
R _{DS(on)} (MAX.)	3.0mΩ
I _D	75A



UIS, R_g 100% Tested

Pb-Free Lead Plating & Halogen Free



ABSOLUTE MAXIMUM RATINGS (T_C = 25 °C Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNIT
Gate-Source Voltage		V _{GS}	±20	V
Continuous Drain Current	T _C = 25 °C	I _D	75	A
	T _C = 100 °C		45	
Pulsed Drain Current ¹		I _{DM}	160	
Avalanche Current		I _{AS}	58	
Avalanche Energy	L = 0.1mH, I _D =58A, R _G =25Ω	E _{AS}	168	mJ
Repetitive Avalanche Energy ²	L = 0.05mH	E _{AR}	84	
Power Dissipation	T _C = 25 °C	P _D	50	W
	T _C = 100 °C		20	
Operating Junction & Storage Temperature Range		T _J , T _{stg}	-55 to 150	°C

100% UIS testing in condition of V_D=15V, L=0.1mH, V_G=10V, I_L=40A, Rated V_{DS}=30V N-CH

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNIT
Junction-to-Case	R _{θJC}		2.5	°C / W
Junction-to-Ambient	R _{θJA}		50	

¹Pulse width limited by maximum junction temperature.

²Duty cycle ≤ 1%

³50°C / W when mounted on a 1 in² pad of 2 oz copper.



ELECTRICAL CHARACTERISTICS (T_C = 25 °C, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = 250μA	30			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	1	1.5	3	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0V, V _{GS} = ±20V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 24V, V _{GS} = 0V			1	μA
		V _{DS} = 20V, V _{GS} = 0V, T _J = 125 °C			25	
On-State Drain Current ¹	I _{D(ON)}	V _{DS} = 10V, V _{GS} = 10V	75			A
Drain-Source On-State Resistance ¹	R _{DS(ON)}	V _{GS} = 10V, I _D = 30A		2.5	3.0	mΩ
		V _{GS} = 4.5V, I _D = 24A		3.0	4.0	
Forward Transconductance ¹	g _{fs}	V _{DS} = 5V, I _D = 24A		25		S
DYNAMIC						
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = 15V, f = 1MHz		2979		pF
Output Capacitance	C _{oss}			381		
Reverse Transfer Capacitance	C _{rss}			224		
Gate Resistance	R _g	V _{GS} = 15mV, V _{DS} = 0V, f = 1MHz		1.6		Ω
Total Gate Charge ^{1,2}	Q _g (V _{GS} =10V)	V _{DS} = 15V, V _{GS} = 10V, I _D = 30A		44.6		nC
	Q _g (V _{GS} =4.5V)			21.2		
Gate-Source Charge ^{1,2}	Q _{gs}			8.3		
Gate-Drain Charge ^{1,2}	Q _{gd}			6.5		
Turn-On Delay Time ^{1,2}	t _{d(on)}		V _{DS} = 15V, I _D = 24A, V _{GS} = 10V, R _{GS} = 2.7Ω		15	
Rise Time ^{1,2}	t _r			10		
Turn-Off Delay Time ^{1,2}	t _{d(off)}			50		
Fall Time ^{1,2}	t _f			10		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (T_C = 25 °C)						
Continuous Current	I _S				75	A
Pulsed Current ³	I _{SM}				150	
Forward Voltage ¹	V _{SD}	I _F = I _S , V _{GS} = 0V			1.3	V
Reverse Recovery Time	t _{rr}	I _F = I _S , dI _F /dt = 100A / μS		32		nS
Peak Reverse Recovery Current	I _{RM(REC)}			200		A
Reverse Recovery Charge	Q _{rr}			12		nC


¹Pulse test : Pulse Width ≤ 300 μsec, Duty Cycle ≤ 2%.

²Independent of operating temperature.

³Pulse width limited by maximum junction temperature.







Ordering & Marking Information:






Device Name: EMB03N03HR for EDFN 5 x 6

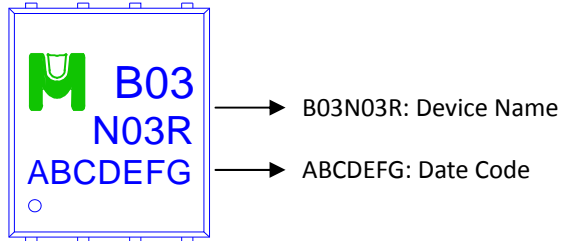




TYPICAL CHARACTERISTICS

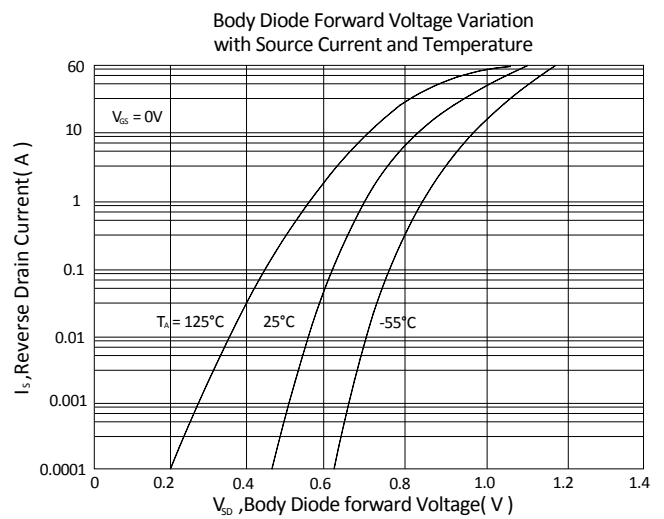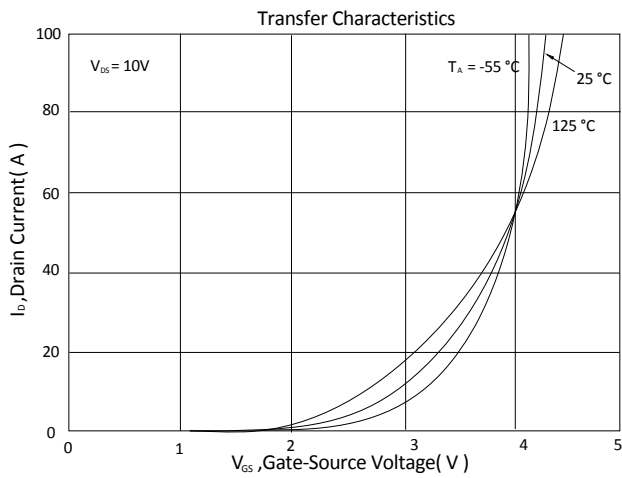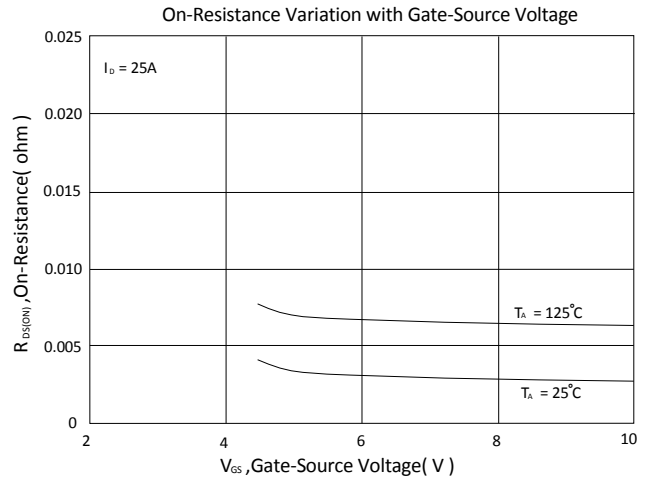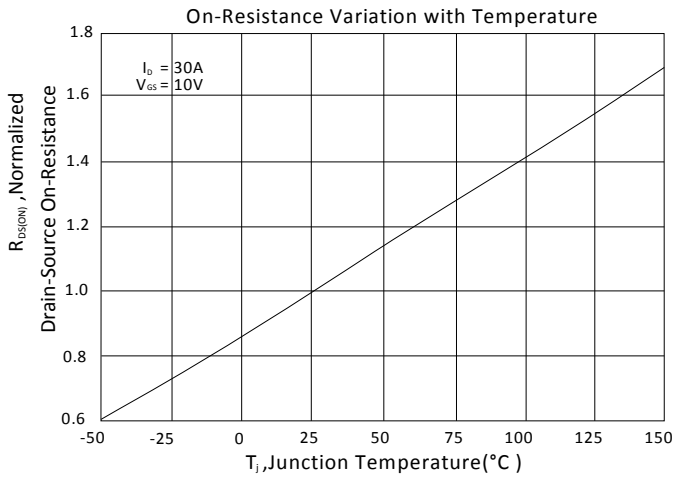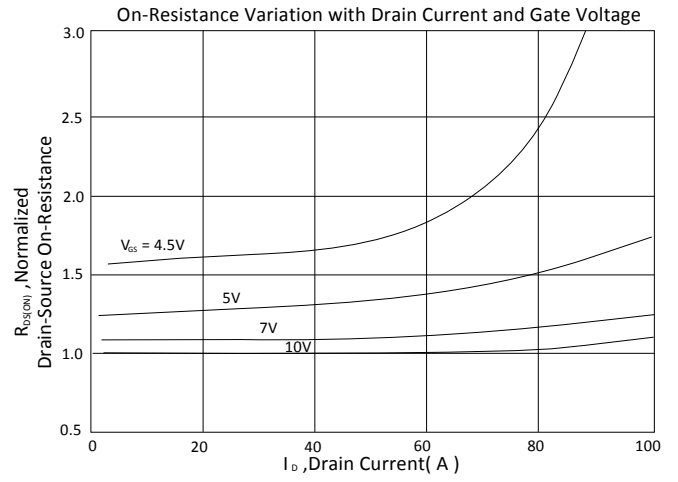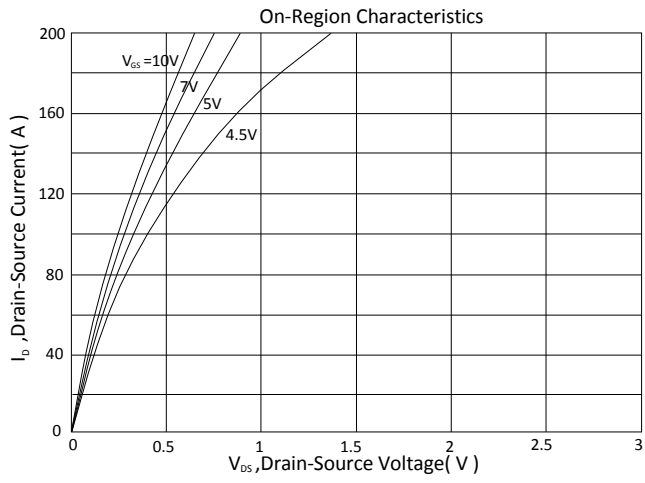

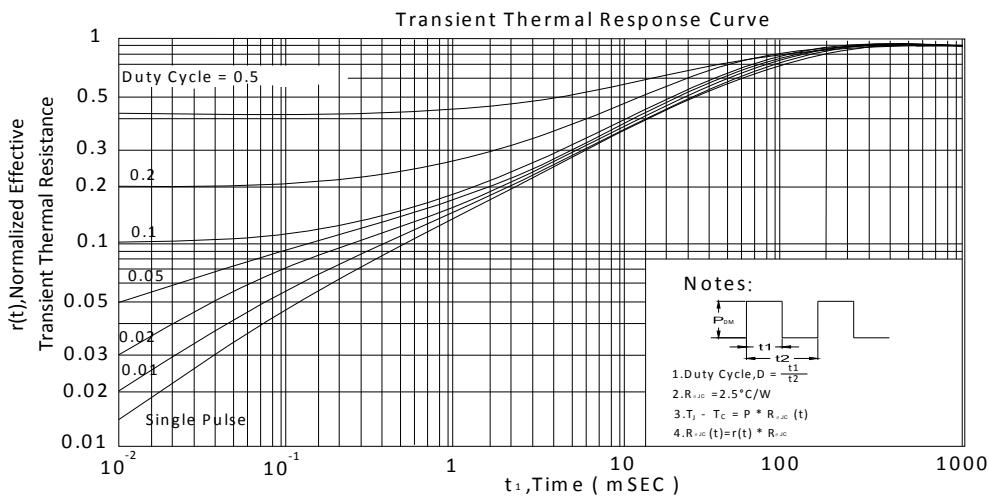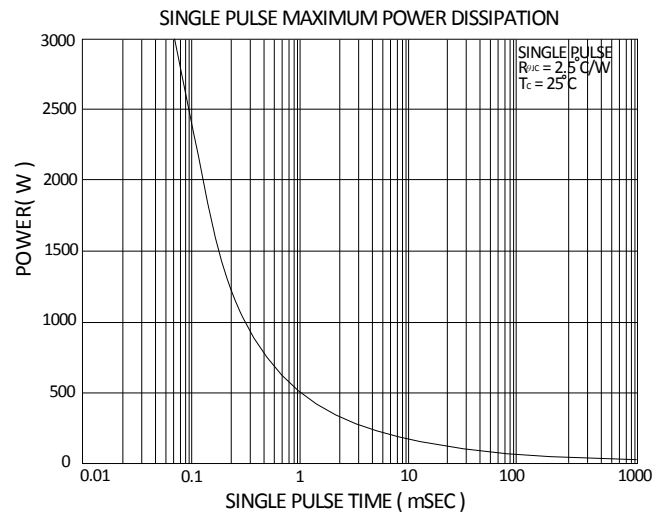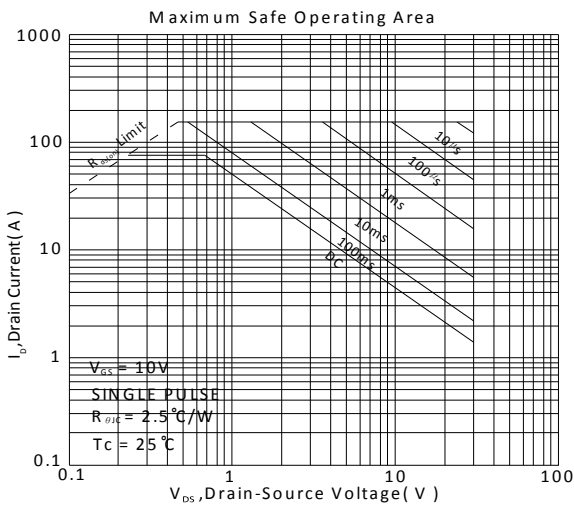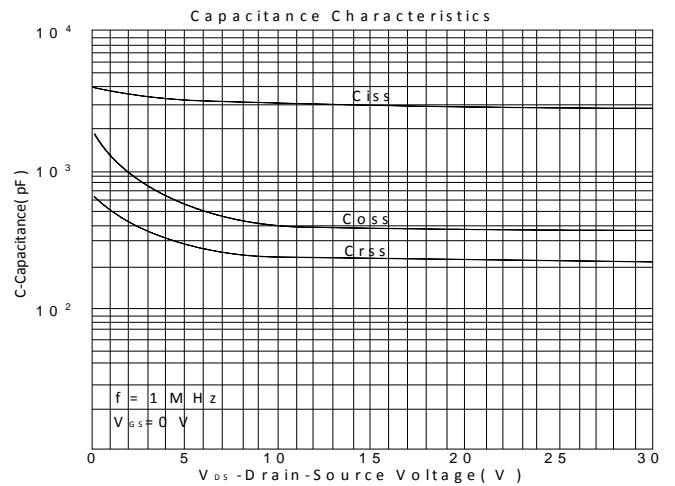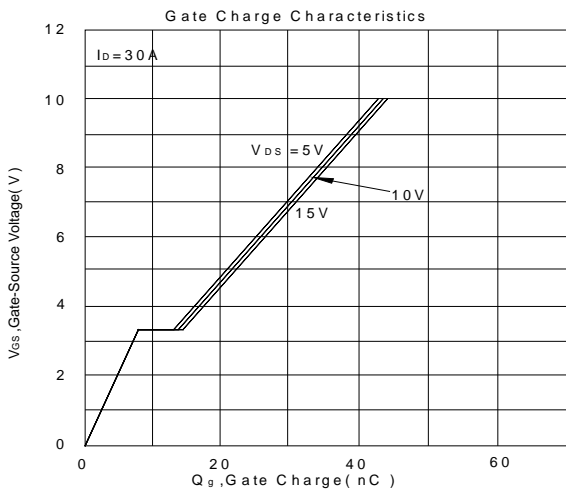




Outline Drawing

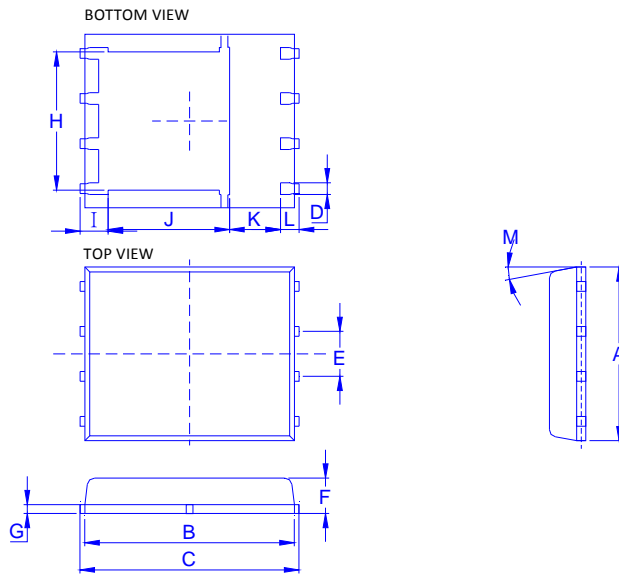

Dimension in mm

Dimension	A	B	C	D	E	F	G	H	I	J	K	L	M
Min.	4.80	5.50	5.90	0.3		0.85	0.15	3.67	0.41	3.00	0.94	0.45	0°
Typ.					1.27								
Max.	5.30	5.90	6.15	0.51		1.20	0.30	4.54	0.85	3.92	1.7	0.71	12°

Recommended minimum pads

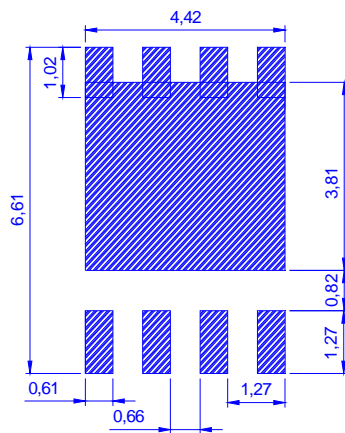

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [EMC](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)