

---


## LCD0805 Series Type

### SMD Inductor for Power Line

---

#### FEATURES

- Utilizing a miniaturized winding structure.
- These products provide low DC resistance and high current.
- Precision inductance tolerance is available.



#### APPLICATIONS

- Personal computers, Hard disk drives
- xDSL modem and Cable modem
- Digital camera and other electronic equipment

#### PRODUCT IDENTIFICATION

LCD 0805 - 1R0 K - T

(1) (2) (3) (4) (5)

(1) Product name

(2) Dimension

(3) Inductance

1R0 : 1.0uH ; 100 : 10uH


(4) Tolerance

J :  $\pm 5\%$  ; K :  $\pm 10\%$  ; M :  $\pm 20\%$

(5) Taping style

T : Taping ; None : Bulk

#### SHAPES AND DIMENSIONS(Unit:mm)

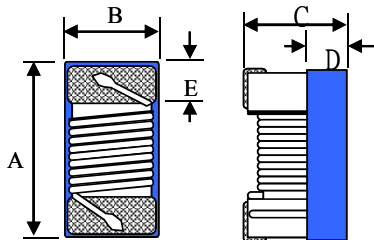

A max. : 2.40 mm


B max. : 1.65 mm

C :  $1.20 \pm 0.1$  mm

D ref. : 0.65 mm

E :  $0.44 \pm 0.1$  mm

#### RECOMMENDED FOOTPRINT(Unit:mm)



## LCD0805 Series Type

### SMD Inductor for Power Line

#### ELECTRICAL CHARACTERISTICS

Our Product Part Number	Inductance (uH)/MHz	Inductance Tolerance	Q/MHz Typ.	SRF Typ. (MHz)	RDC ±30% (Ω)	Idc Typ. (mA)	Irms Typ. (mA)	Color Coding
LCD0805-R47□-T	0.47/7.9	K,M	14/7.9	850	0.12	1400	1500	Blue
LCD0805-R68□-T	0.68/7.9	K,M	14/7.9	765	0.15	1200	1300	Gray
LCD0805-1R0□-T	1.0/7.9	K,M	14/7.9	208	0.13	1100	1300	Black
LCD0805-1R2□-T	1.2/7.9	K	14/7.9	159	0.16	960	1270	Red
LCD0805-1R5□-T	1.5/7.9	K,M	14/7.9	159	0.17	920	1260	Brown
LCD0805-1R8□-T	1.8/7.9	K,M	14/7.9	112	0.20	860	1080	Orange
LCD0805-2R2□-T	2.2/7.9	K,M	13/7.9	87	0.22	740	1040	Red
LCD0805-2R7□-T	2.7/7.9	K,M	13/7.9	72	0.25	680	1040	Yellow
LCD0805-3R3□-T	3.3/7.9	K,M	12/7.9	70	0.28	620	1020	Orange
LCD0805-3R9□-T	3.9/7.9	K,M	14/7.9	61	0.38	580	960	Green
LCD0805-4R7□-T	4.7/7.9	K,M	14/7.9	51	0.43	520	840	Yellow
LCD0805-5R6□-T	5.6/7.9	K,M	12/7.9	47	0.50	480	800	Blue
LCD0805-6R8□-T	6.8/7.9	K,M	14/7.9	46	0.68	420	700	Green
LCD0805-8R2□-T	8.2/7.9	K,M	13/7.9	33	0.73	400	680	Violet
LCD0805-100□-T	10/2.5	J,K,M	14/2.5	31	0.85	360	560	Blue
LCD0805-120□-T	12/2.5	J,K,M	14/2.5	30	0.90	340	460	Gray
LCD0805-150□-T	15/2.5	J,K,M	15/2.5	28	1.40	300	380	Violet
LCD0805-180□-T	18/2.5	J,K,M	15/2.5	27	1.55	280	360	White
LCD0805-220□-T	22/2.5	J,K,M	15/2.5	20	1.76	240	340	Gray
LCD0805-270□-T	27/2.5	J,K,M	15/2.5	17	2.00	220	300	Black
LCD0805-330□-T	33/2.5	J,K,M	15/2.5	17	2.35	200	300	White
LCD0805-470□-T	47/2.5	J,K,M	14/2.5	15	3.40	160	280	Black
LCD0805-560□-T	56/2.5	J,K,M	14/2.5	10	4.42	150	240	Yellow
LCD0805-680□-T	68/2.5	J,K,M	14/2.5	10	4.45	140	240	Brown
LCD0805-820□-T	82/2.5	J,K,M	14/2.5	10	7.50	100	180	Orange
LCD0805-101□-T	100/1.0	J,K,M	10/1.0	9	7.50	100	180	Red

- When ordering, please specify tolerance and packaging codes. Ex: LCD0805-100J-T

Tolerance : J = ±5%, K = ±10%, M = ±20%

Packaging : Clear tape and reel { standard }.

- L, Q : Agilent/HP E4991A+ Agilent/HP16197A

(The electrical specification test by the smallest gap position) or HP16193A

- SRF : Agilent/HP E4991A+ Agilent/HP 16197A

(The electrical specification test by the smallest gap position) or HP16193A

- Rdc : DIGITAL MILLIOHM METER Chroma 16502, or equivalent.


- Idc for Inductance drop 10% from its value without current.

- Irms for a 25°C rise above 25°C ambient.

- Operating temperature range from -25°C to 85°C.

- Packaging quantity: 2000 pcs/reel

1st



COLOR CODING

---



## LCD0805 Series Type

### SMD Inductor for Power Line

---

## ELECTRICAL CHARACTERISTICS

Characteristics(L,Q vs. Frequency)

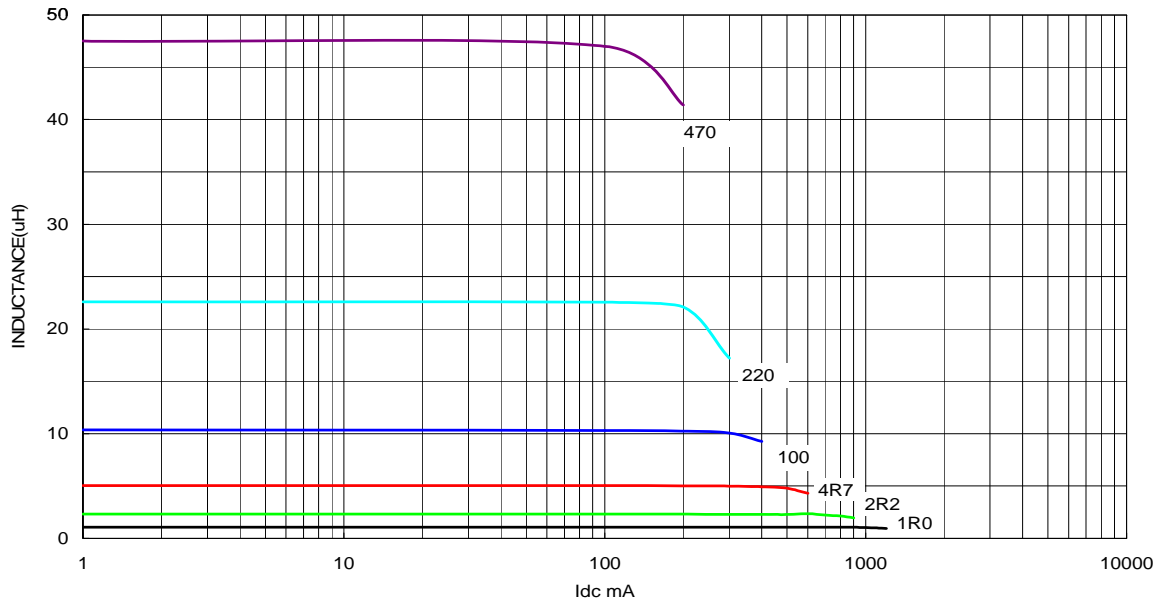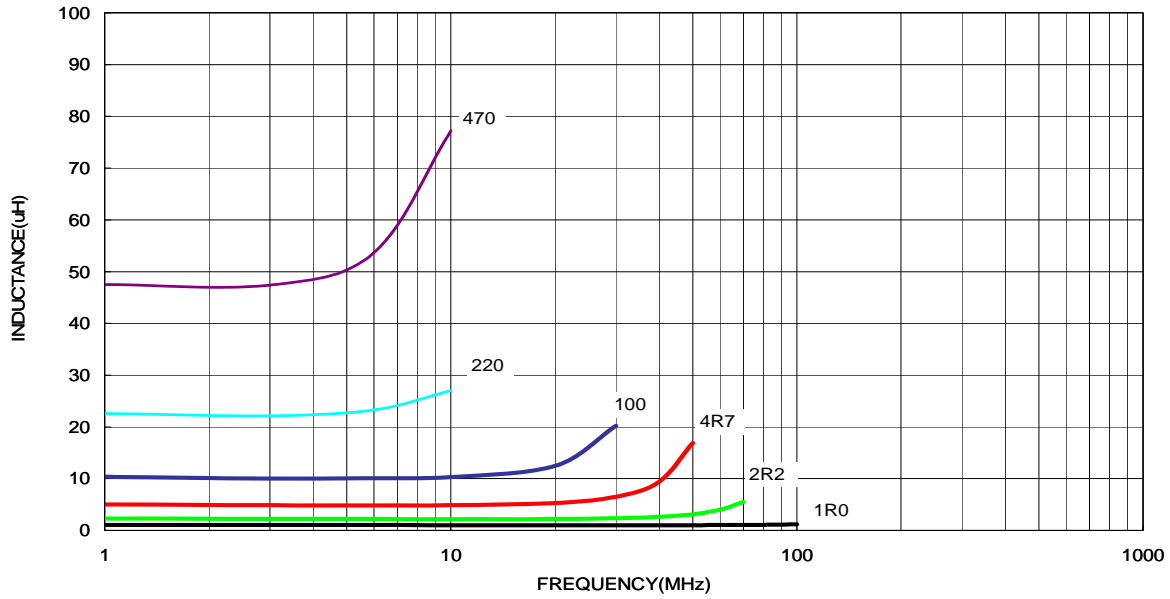

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [EMTEK](#) manufacturer:*

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)  
[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)  
[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)  
[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)  
[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)