kHz RANGE CRYSTAL UNIT

FC - 12D/FC - 12M

•Frequency range : 32.768 kHz (32 kHz to 77.5 kHz)
•External dimensions : 2.05 x 1.25 x 0.35 mm···FC-12D
: 2.05 x 1.2 x 0.6 mm···FC-12M

•Overtone order : Fundamental

•Applications : Smart card (Please contact us for

except Smart card use.)···FC-12D

Small devices...FC-12M





Product Number (please contact us) FC-12D: X1A000111xxxx00 FC-12M: X1A0000x1xxxx00






Actual size

FC-12D	FC-12M
<u>-</u>	=

Specifications (characteristics)


Item	Symbol	Specifications		Conditions / Remarks	
	Symbol	FC-12D	FC-12M		Conditions / Remarks
Nominal frequency range	f_nom	32.768 kHz	32.768 kHz	32 kHz to 77.5 kHz	Please contact us about available frequencies.
Storage temperature	T_stg	-55 °C to +125 °C		Storage as single product.	
Operating temperature	T_use	-40 °C to +85 °C			
Level of drive	DL	0.25 μW Max.	0.5 μW Max.		
Frequency tolerance (standard)	f_tol	±20 × 10 ⁻⁶	±20 × 10 ⁻⁶ ±30 × 10 ⁻⁶		+25 °C, DL=0.1 μW Please ask for tighter tolerance
Turnover temperature	Ti	+25 °C ±5 °C			
Parabolic coefficient	В	$-0.04 \times 10^{-6} / {}^{\circ}\text{C}^{2} \text{Max}.$			
Load capacitance	CL	7 pF, 9pF, 12.5pF	12.5pF		Please specify
Motional resistance (ESR)	R1	75 kΩ Max.	90 kΩ Max.	90 k Ω to 65 k Ω	
Motional capacitance	C1	3.7 fF Typ.	6.4 fF Typ.	7.0 fF to 2.7 fF	
Shunt capacitance	C ₀	0.8 pF Typ.	1.3 pF Typ.	1.6 pF to 0.8pF	
Frequency aging	f_age	±3 × 10 ⁻⁶ / year Max.			+25 °C, First year

①Model ②Frequency ③Load capacitance(pF) ④Frequency tolerance(x 10⁻⁶, +25 °C)

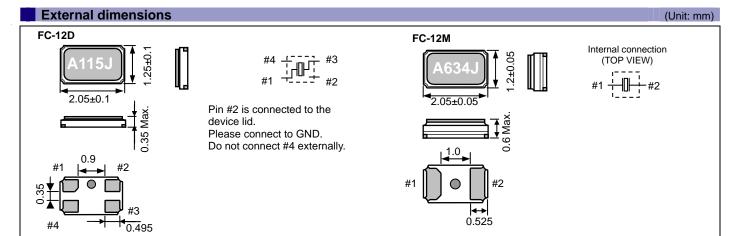

Footprint (Recommended)

(Unit: mm)

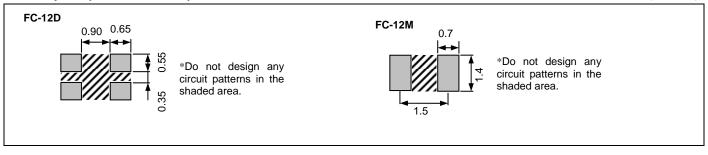

PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING TO INTERNATIONAL STANDARDS

At Seiko Epson, all environmental initiatives operate under the Plan-Do-Check-Action (PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard.

All of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification.

ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.

WORKING FOR HIGH QUALITY

In order provide high quality and reliable products and services than meet customer needs,

Seiko Epson made early efforts towards obtaining ISO9000 series certification and has acquired ISO9001 for all business establishments in Japan and abroad. We have also acquired ISO/TS 16949 certification that is requested strongly by major automotive manufacturers as standard.

ISO/TS16949 is the international standard that added the sector-specific supplemental requirements for automotive industry based on ISO9001.

Explanation of the mark that are using it for the catalog



►Pb free.



- ► Complies with EU RoHS directive.
 - *About the products without the Pb-free mark.

 Contains Pb in products exempted by EU RoHS directive.

 (Contains Pb in sealing glass, high melting temperature type solder or other.)



▶ Designed for automotive applications such as Car Multimedia, Body Electronics, Remote Keyless Entry etc.



 \blacktriangleright Designed for automotive applications related to driving safety (Engine Control Unit, Air Bag, ESC etc).

Notice

- This material is subject to change without notice.
- Any part of this material may not be reproduced or duplicated in any form or any means without the written permission of Seiko Epson.
- The information about applied circuitry, software, usage, etc. written in this material is intended for reference only. Seiko Epson does
 not assume any liability for the occurrence of infringing on any patent or copyright of a third party. This material does not authorize the
 licensing for any patent or intellectual copyrights.
- When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
- You are requested not to use the products (and any technical information furnished, if any) for the development and/or manufacture of
 weapon of mass destruction or for other military purposes. You are also requested that you would not make the products available to
 any third party who may use the products for such prohibited purposes.
- These products are intended for general use in electronic equipment. When using them in specific applications that require extremely high reliability, such as the applications stated below, you must obtain permission from Seiko Epson in advance.
 - / Space equipment (artificial satellites, rockets, etc.) / Transportation vehicles and related (automobiles, aircraft, trains, vessels, etc.) / Medical instruments to sustain life / Submarine transmitters / Power stations and related / Fire work equipment and security equipment / traffic control equipment / and others requiring equivalent reliability.
- · All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Resonators category:

Click to view products by Epson manufacturer:

Other Similar products are found below:

B39431R820H210 ECS-HFR-40.00-B-TR CSTLS4M00G53Z-A0 ECS-CR2-16.00-A-TR ECS-HFR-20.00-B-TR ECS-CR2-20.00-A-TR RO3164E-3 CSTNE14M7V510000R0 AWSCR-4.19CRLB-C15-T3 AWSCR-4.91CRLB-C15-T3 AWSCR-5.00CPLB-C30-T4 CSTNE8M00GH5C060R0 9AC04194152080D2JB CSTCR4M91G55B-R0 CSTLS3M68G56-B0 FC-12M32.768KHZ9PF20PPM 7Y032768NW2 ASR315S2 ASR433.42E-T 146-32.768-12.5-20-20/A ZTA 3.68MG X1A000091000500 X1A0000910001 AWSCR-25.00CW-T AWSZT-12.00MWD-T ECS-SR1-4.19-B-TR 7C024000HW1 7C012000IW1 7C012000MW1 7C016000HW1 7C016000HW1 7C016000HW1 7C024576RW1 X201632MKB4SI 7C027000MW1 7E25000E18UCG 7E50000E18UCG XYCCCLNANF-16.000000MHZ XYDBPCNANF-12MHZ XYDBBCNANF-16.000000MHZ XYDBBCNANF-24.000000MHZ XYHCCLNANF-24.000000MHZ XYBBCLNANF-26.000000MHZ CM4012M00020T8188026