


260 W Programmable Constant Current LED Driver with 0-10 V Dimming & Integrated Bluetooth® Mesh

Input Voltage	Max. Output Power	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Type and Range	Startup Time
120 & 277 Vac nominal	260 W	up to 93% typical	90°C (measured at the hot spot)	< 20% (from 100% to 50% of max rated power)	> 0.9 (from 100% to 50% of max rated power)	0 - 10V, 1 -100% (% of Iout)	500 ms typical

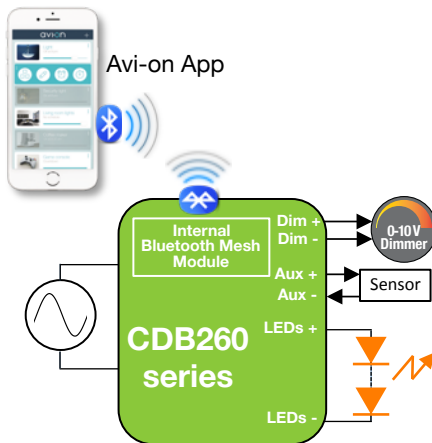

Aluminum Case
L 217/240.5 x W 50.8 x H 38.5 mm
(L 8.54/9.47 x W 2.00 x H 1.52 in)

Ordering Part Number	Nominal Input Voltage (Vac)	Max Output Power (W)	Iout 1 (mA)	Vout 1 (Vdc)	Iout 2 (mA)	Vout 2 (Vdc)
CDB260W-0860-400-□	120 & 277	260	430 to 860	234 to 300	325 to 650	312 to 400
CDB260W-1300-280-□	120 & 277	260	650 to 1300	156 to 200	465 to 930	218 to 280
CDB260W-1700-210-□	120 & 277	260	850 to 1700	117 to 150	620 to 1240	164 to 210

- : Suffix to designate the antenna option
 • W: Wire whip antenna
 • R: Removable external antenna connected to RPSMA connector

PROGRAMMING

- Dual output voltage range selection
- Serial port programming
 - Current: 100% to 50% in each voltage range
 - Data log read: SKU, S/N, lot code, hours of operation, FW revision, fault events: power failure, transients (short or surge), thermal

COMMUNICATION

- Bi-directional (dimming ↑ and ↓ and data log read)
- Bluetooth Mesh with wire whip antenna and external removable antenna

AVI-ON BLUETOOTH MESH SOLUTION

- Wireless lighting controls with simple set-up
- Pre-integrated Bluetooth Smart + CSRmesh module enables brands to create multi-way controls and switching without additional wiring; no central gateway required
- Utility grade, secure, reliable mobile app & software
- Dimming, grouping, many users, schedules, timers
- Virtually unlimited range with mesh
- Download for free, additional services available



FEATURES

- Non-linear 0-10V dimming profile with dim-to-off
- Auxiliary output 12 V/100 mA
- IP66-rated case with silicone-based potting
- UL Class P
- Outdoor Surge protection:
 - IEC61000-4-5: 6 kV line to line/6 kV line to earth
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class A at 120 Vac & 277 Vac
- Lifetime: 50,000 hours @ Tc = 70°C
- 90°C maximum case hot spot temperature

APPLICATIONS

- Outdoor & Indoor
- Horticulture grow lights
- Street lights, Area lights
- Industrial high-bay lights

CHINA Operations

tel: +86-756-6266298
 No. 8 Pingdong Road 2
 Zhuhai, Guangdong, China 519060

www.erp-power.com

SaveEnergy@erp-power.com

USA Headquarters

tel: +1-805-517-1300
 893 Patriot Drive, Suite E
 Moorpark, CA 93021, USA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [ERP Power](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [EUC-075S105DT](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [SLM160W-3.9-40-ZA](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [ESS040W-1400-27](#) [ESS015W-0700-18](#) [ESS010E-0250-42](#) [EVM120W-2700-42-ECN2](#) [EDC-100S105SV-0007](#) [79278](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [50304](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [OT FIT 50/220-240/300 D L](#) [OT FIT 35/220-240/350 D CS L](#) [OT FIT 65/220-240/350 D CS L](#) [ELEMENT 30/220-240/700 S](#) [LC 75W 100-400MA 1-10V LP EXC](#) [LCA 35W 150-700MA ONE4ALL LP PRE](#) [LCA 50W 100-400MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA 2XCH LP PRE](#) [LCI 150/325-1050/300 O4A SL PRE](#) [LCA 75W 100-400MA ONE4ALL LP PRE](#) [LCA 45W 500-1400MA ONE4ALL SC PRE](#) [LC 50W 100-400MA FLEXC LP EXC](#) [LCA 75W 350-1050MA ONE4ALL LP PRE](#) [LC 50W 350-1050MA FLEXC LP EXC](#) [LC 75W 350-1050MA FLEXC LP EXC](#)