Flat Cable EMI Suppression Cores (2643166551)



Part Number: 2643166551

43 FULL FLAT CABLE CORE

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- − Digits 3 & 4 = Material Grade

Flat cable suppression core can accommodate multi- conductors flat cables, in widths from 12.7 mm (0.500) up to 77 mm (3.0). These flat cable cores are available in two ferrite material grades to reduce conducted EMI from 1 MHz to hundreds of MHz.

Our Expanded Cable & Suppressor Kit (part number 0199000005) contains a selection of these flat cable cores and clips.

Flat Cable Cores are available in selected sizes in the Flex Circuit & Ribbon Cable Core Kit (part number 0199000038).

Assembly clips are available for most of the split flat cable cores. See section Flat Cable Cores Assembly clips.

Catalog Drawing 3D Model

Weight: 71 (g)

Dim	mm	mm tol	nominal inch	inch misc.		
A	45.1	±0.75	1.776			
В	34.4	±0.70	1.354			
С	28.6	±0.70	1.126			
D	12.45	±0.40	0.49	_		
Е	1.5	±0.30	0.059			

Cable Information						
Max Diameter	Max Dimension	Solid Equivalent	Flat Cable Cores			
0	33.70 x 1.20	_	-			




Chart Legend


- + Test frequency
- •For assembly clips see Flat Cable Cores Assembly Clips

Typical Impedance	(Ω)
10 MHz	80
25 MHz ⁺	128
100 MHz ⁺	263
250 MHz	475

Flat cable suppression cores, split or single cores, are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is listed on our catalog drawing.

Catalog Drawing

Centered, single turn impedance tests for the 31 and 43 material parts are performed on the E4990A Impedance Analyzer. All tests are made with the shortest practical wire length.

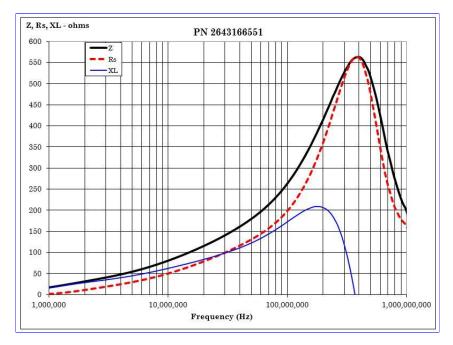

CSV Download

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ferrite Cable Cores category:

Click to view products by Fair-Rite manufacturer:

Other Similar products are found below:

FB73-422 FX28R0984-0 FX28R0984-2 AB 3X2X3SM 2643164251 2643665709 2661626402 LB 2.8X4.5U 28R1127 28R1260 28R1575 SM28R0760 2631006302 2643165451 2643178351 28R0760 4327 030 11761 SS7X4X3W 4327 030 16141 2643103102 2643164151 2943666671 2643163851 AB4X2X6SM 28B1101 SM28R1575 2643625902 2643626102 28B0268-000 28B0375-100 28B0375-300 28B0500-100 28B0562-000 28B0562-200 28B0625-100 28B1020-100 28B1417-200 28R1101-000 28R1102-100 28R1127-500 28R0453-200 28R0669-000 28R0898-200 28R0756-200 28R0480-000 28R1127-000 28R0984-200 28R0592-010 28R0756-000