

## Round Cable EMI Suppression Cores (2643540102)



Part Number: 2643540102

43 ROUND CABLE CORE

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class

- Digits 3 & 4 = Material Grade

- Last digit 2 = Burnished (All cable cores have been burnished to remove the sharp edges)

Fair- Rite offers a broad selection of ferrite EMI suppression cable cores in several materials with guaranteed minimum impedance specifications.

For smaller suppression parts, refer to the section EMI Suppression Beads.

Our Expanded Cable and Suppressor Kit (part number 0199000005) contains a selection of these suppression cores.

For any cable suppression core not listed here, feel free to contact our customer service group for availability and pricing.

Catalog Drawing 3D Model

The C dimension, the core length, can be modified to suit specific applications.

<u>Weight:</u> 6.3 (g)

| Dim | mm    | mm tol     | nominal inch | inch misc. |            | 10 |   |
|-----|-------|------------|--------------|------------|------------|----|---|
| А   | 14.3  | ±0.45      | 0.563        |            | $\bigcirc$ | 1  | 7////////////////////////////////////// |
| В   | 6.35  | ±0.25      | 0.25         |            | ((+))      | в  |   |
| С   | 10.15 | $\pm 0.40$ | 0.4          | _          |            | +  |   |
|     |       |            |              |            | - A -      |    | - c -                                   |

## Chart Legend

+ Test frequency


The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual NI (ampere- turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note  $\Box$ How to choose Ferrite Components for EMI Suppression  $\Box$ .

| Typical Impedance     | $(\Omega)$ |  |  |  |  |  |  |  |
|-----------------------|------------|--|--|--|--|--|--|--|
| 10 MHz                | 43         |  |  |  |  |  |  |  |
| 25 MHz <sup>⁺</sup>   | 68         |  |  |  |  |  |  |  |
| $100 \text{ MHz}^+$   | 98         |  |  |  |  |  |  |  |
| 250 MHz               | 106        |  |  |  |  |  |  |  |
| Electrical Properties |            |  |  |  |  |  |  |  |
| H(Oe) 0.43            |            |  |  |  |  |  |  |  |
|                       |            |  |  |  |  |  |  |  |

Suppression cable cores are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is listed on our catalog drawing.

Catalog Drawing

Single turn impedance tests for 31, 43 and 46 material cores are performed on the E4991A/ HP4291B Impedance Analyzer. The 61 material parts are tested on the E4991A / HP4291B Impedance Analyzer and 75 material parts are tested on the E4990A Impedance Analyzer. Cores are tested with the shortest practical wire length.

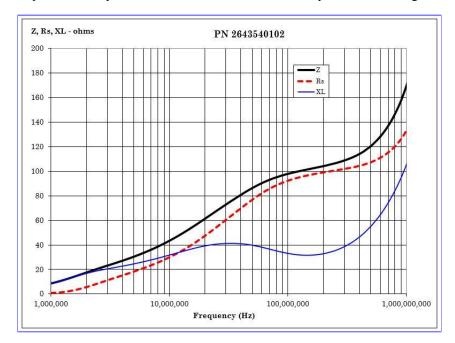

CSV Download

|              | Fair- Rite Products Corp. |              |  | • One Commercial  | One Commercial Row, Wallkill, New York 12589-0288 |  |  |                    |
|--------------|---------------------------|--------------|--|-------------------|---|--|--|--------------------|
| 888-324-7748 |                           | 845-895-2055 |  | Fax: 845-895-2629 |   |  |  | www.fair- rite.com |

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ferrite Cable Cores category:

Click to view products by Fair-Rite manufacturer:

Other Similar products are found below :

 FB73-422
 FX28R0984-0
 FX28R0984-2
 AB 3X2X3SM
 2643164251
 2643665709
 2661626402
 LB 2.8X4.5U
 28R1127
 28R1260
 28R1575

 SM28R0760
 2631006302
 2643165451
 2643178351
 28R0760
 4327 030
 11761
 SS7X4X3W
 4327 030
 16141
 2643103102
 2643164151

 2943666671
 2643163851
 AB4X2X6SM
 28B1101
 SM28R1575
 2643625902
 2643626102
 28B0268-000
 28B0375-100
 28B0375-300

 28B0500-100
 28B0562-000
 28B0562-200
 28B0625-100
 28B1020-100
 28B1417-200
 28R1101-000
 28R1127-500
 28R0453 

 200
 28R0669-000
 28R0756-200
 28R0480-000
 28R1127-000
 28R0984-200
 28R0592-010
 28R0756-000