


Type:	AERO DF03	REV: 7.2
Issued:	26/06/2014	SK
Modified:	13/11/2015	PB

Flat Drop Optical Cable AERO DF03 up to 24 fibers

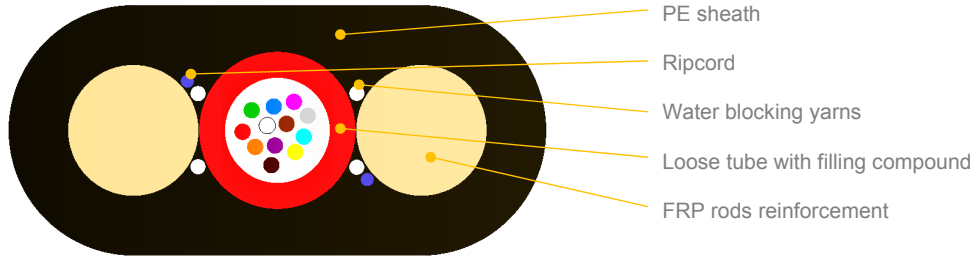

*not to scale

APPLICATION:

For installation on poles or walls
Can be installed in pipelines
Fully dielectric cable

DESIGN:

Central loose tube(PBT) with filling compound
Up to 24 fibres in a central tube
Two FRP strength elements
Dry yarns to prevent moisture ingress
Ripcord for easy sheath removal
UV stabilized HDPE jacket

CABLE VARIANTS

Variant	AERO DF03	AERO DF03
Fibre count [pcs]	1-12	16-24
Cable dimensions [mm]	8,3 x 4,6 (typically ±0,3 max 8,9 x 5,1)	8,7 x 5,0 (typically ±0,3 max 9,3 x 5,5)
Cable weight [kg/km]	37	38
Max. static tension [N]	350	350
Max allowable tension [N]	1300	1300

MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS (ALL VARIANTS)

Crush performance	5000 [N/10 cm]	EN 187101, IEC 60794-1-2-E3, attenuation ≤ 0.05 dB, no damage
Bending performance	20 x D (10 cycles)	EN 187101, IEC 60794-1-2-E6, attenuation ≤ 0.05 dB, no damage
Water penetration	3m sample, 1m head, 24h	IEC 60794-1-2-F5, no leakage
Temperature range:		EN 187101, IEC 60794-1-2-F1, attenuation ≤ 0.05 dB/km
	Installation	-15... +55 [°C]
	Operation	-40... +70 [°C]
	Transport & Storage	-40... +70 [°C]

APPLICATION AND CABLE SPAN CHARACTERISTIC

Loading Conditions	Span [m]	Installed Sag (2%) [m]	Force [N]	Total Sag [m]
NSC Light	120	2,4	1500	4,1
NSC Medium	70	1,4	1600	2,6
NSC Heavy	40	0,8	1700	1,6

(*) values for single-mode fibres, all optical measurements performed at 1550nm

OPTICAL FIBRES AND LOOSE TUBES COLOUR IDENTIFICATION

Fibres and tubes identification information see **DSH_Colors_CODE_XXXX** document.

FIBRES PARAMETERS

Optical fibres parameters see **DSH_OFP** document.

Type:	AERO DF03	REV: 7.2
Issued:	26/06/2014	SK
Modified:	13/11/2015	PB

MARKING

The following print (white / ink jet) is applied at 1-meter intervals:

- Supplier: FIBRAIN
- Standard code (product type, fibre type, fibre count)
- Year of manufacture: xxxx
- Length marking in meters
- Cable ID / Drum No

Example: FIBRAIN AERO DF03 4F SM G652D 1T4F "YEAR OF MANUFACTURE" "LASER SYMBOL" "LENGTH MARKING" "BATCH NUMBER"

The accuracy of marking is $\pm 1\%$. Remarkings is in accordance with Bellcore GR 20 and supersedes earlier markings. Occasional loss of marking is possible. Cables can be supplied with a range of single mode or multimode fibres and customized print.

PACKING

Cables will be shipped on disposable wooden or treated wooden drums. Both ends of the cable will be capped and accessible for testing. Identification information will be placed on the drum.

DELIVERY LENGTH

2000 – 8000 meters $\pm 5\%$, with possibility of supplying up to 5% of total contract quantity as short length cables which should be above 1000 meters long. Tolerance of 5 % of order quantity shall be allowed.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fiber Optic Cables](#) category:

Click to view products by [FIBRAIN](#) manufacturer:

Other Similar products are found below :

[FPD01SBS200](#) [FPD06SCC200](#) [FPT01SBS200](#) [FQZ-12-10](#) [FXL12D5-5F40](#) [FXO12D5-5F10Y](#) [FXO12D5-5F19Y](#) [B96566](#) [FPDK01SCC100](#)
[HFBR-RSD005Z](#) [FX2ELQ1Q1SNM4.5](#) [FX2ELQ1Q1SNM5.5](#) [FX2ELQ1Q1SNM6.5](#) [FX2ELQ1Q1SNM7.5](#) [FX2ELQ1Q1SNM8.5](#)
[FX2ELQ1Q1SNM9.5](#) [FX8RL7NQSVM1.5](#) [FX8RL8NQSVM1.5](#) [FX8RL7NQSVM2.5](#) [FX8RL8NQSVM2.5](#) [FX8RL7NQSVM3.5](#)
[FX8RL8NQSVM3.5](#) [FX8RL7NQSVM4.5](#) [FX8RL8NQSVM4.5](#) [F98RL5NQSQNM1.5](#) [F98RL6NQSQNM1.5](#) [F98RL5NQSQNM2.5](#)
[F98RL6NQSQNM2.5](#) [F98RL5NQSQNM3.5](#) [F98RL6NQSQNM3.5](#) [F98RL5NQSQNM4.5](#) [F98RL6NQSQNM4.5](#) [FZ8RL7NQSVM1.5](#)
[FZ8RL8NQSVM1.5](#) [FZ8RL7NQSVM2.5](#) [FZ8RL8NQSVM2.5](#) [FZ8RL7NQSVM3.5](#) [FZ8RL8NQSVM3.5](#) [FZ8RL7NQSVM4.5](#)
[FZ8RL8NQSVM4.5](#) [F9TRL5NQSSNM1.5](#) [F9TRL5NQSSNM2.5](#) [F9TRL5NQSSNM3.5](#) [F9TRL5NQSSNM4.5](#) [F9TRL6NQSSNM1.5](#)
[F9TRL6NQSSNM2.5](#) [F9TRL6NQSSNM3.5](#) [F9TRL6NQSSNM4.5](#) [FXTRL8NQSONM1.5](#) [FZTRL8NQSONM1.5](#)