


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. DIAMETER DIMENSION, SHOWN FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [] ARE ENGLISH.
3. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

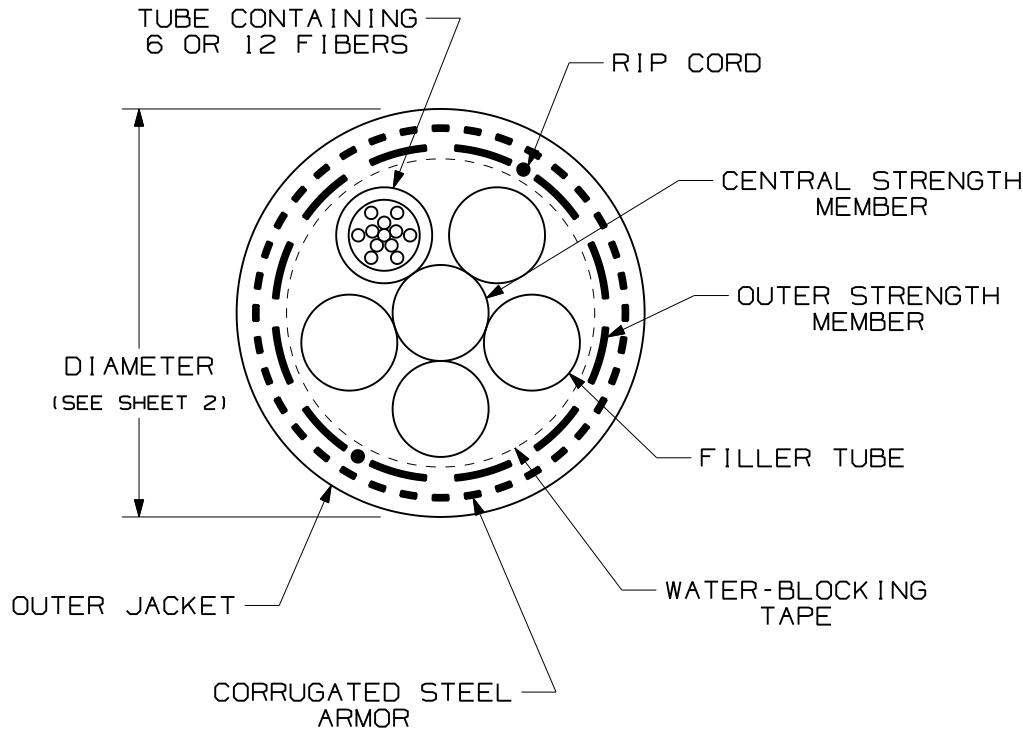


TECHNICAL SPECIFICATIONS		
MAXIMUM LOSS		SINGLEMODE MAXIMUM LOSS
3.5 dB/KM @ 850nm 1.5 dB/KM @ 1300nm		.40 dB/KM @ 1310nm .30 dB/KM @ 1500nm
BEND RADIUS		
INSTALLATION		LONG TERM
30.0cm (11.8in)		15.0cm (5.9in)
TENSILE LOAD		
INSTALLATION		LONG TERM
2700 N (600 lbf)		890 N (200 lbf)
TEMPERATURE		
INSTALLATION	OPERATION	STORAGE
-30° C TO +60° C -22° F TO +140° F	-40° C TO +70° C -40° F TO +158° F	-40° C TO +75° C -40° F TO +167° F

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
02	10-29-09	EFK		RELEASED TO PRODUCTION	02055-158				

OUTSIDE PLANT SINGLE ARMOR-SINGLE JACKET
CABLE WITH UP TO 12 FIBER SUB-UNITS
CUSTOMER DRAWING



PANDUIT™
CORP.
TINLEY PARK, ILL 60477



ALL DIMENSIONS ARE GIVEN IN INCHES,
UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) (.XXX)±0.3 (.010)
(.XX)±0.8 (.03) ANGLES



DRAWING FILENAME
M02055DA_DC_6-48/00C
SCALE
NONE

DRAWN BY
EFK
DATE
07-10-07
CHK'D
WMA

REVIEW DRAWING NUMBERS

PART NO. FSWN***
FOWN***
DRAWING NO.
02055-158
SHEET 1 OF 2
SIZE
A

PANDUIT PART NUMBER	FIBER TYPE	FIBER COUNT	TUBE COUNT	FILLER TUBES	DIAMETER
FSWN906	SINGLEMODE 9/125um	6	1 WITH 6 FIBERS	4	15.0mm (0.59")
FSWN912		12	1 WITH 12 FIBERS		
FSWN924		24	2 WITH 12 FIBERS		
FSWN936		36	3 WITH 12 FIBERS		
FSWN948		48	4 WITH 12 FIBERS		
FSWN606	MULTIMODE 62.5/125um	6	1 WITH 6 FIBERS	4	
FSWN612		12	1 WITH 12 FIBERS		
FSWN624		24	2 WITH 12 FIBERS		
FSWN636		36	3 WITH 12 FIBERS		
FSWN648		48	4 WITH 12 FIBERS		
FSWN506	MULTIMODE 50/125um	6	1 WITH 6 FIBERS	4	
FSWN512		12	1 WITH 12 FIBERS		
FSWN524		24	2 WITH 12 FIBERS		
FSWN536		36	3 WITH 12 FIBERS		
FSWN548		48	4 WITH 12 FIBERS		
FOWNX06	MULTIMODE 50/125um OM3	6	1 WITH 6 FIBERS	4	
FOWNX12		12	1 WITH 12 FIBERS		
FOWNX24		24	2 WITH 12 FIBERS		
FOWNX36		36	3 WITH 12 FIBERS		
FOWNX48		48	4 WITH 12 FIBERS		
FOWNZ06	MULTIMODE 50/125um OM4	6	1 WITH 6 FIBERS	4	
FOWNZ12		12	1 WITH 12 FIBERS		
FOWNZ24		24	2 WITH 12 FIBERS		
FOWNZ36		36	3 WITH 12 FIBERS		
FOWNZ48		48	4 WITH 12 FIBERS		

										OUTSIDE PLANT SINGLE ARMOR-SINGLE JACKET CABLE WITH UP TO 12 FIBER SUB-UNITS CUSTOMER DRAWING		
										 PANDUIT ™ CORP. TINLEY PARK, ILL 60477		
										 THIRD ANGLE PROJECTION		
										ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) (.XXX)±0.3 (.010) (.XX)±0.8 (.03) ANGLES		
										DRAWING FILENAME MO2055DA_DC_6-48/00C		
										SCALE NONE		
										PART NO. FSWN*** FOWN***		
02	10-29-09	EFK		RELEASED TO PRODUCTION	02055-158					DATE 07-10-07	DRAWING NO. 02055-158	SIZE A
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH	CHK'D WMA	SHEET 2 OF 2	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fiber Optic Cables category](#):

Click to view products by [Panduit manufacturer](#):

Other Similar products are found below :

[FPD01SBS200](#) [FPD06SCC200](#) [FPT01SBS200](#) [FQZ-12-10](#) [FXL12D5-5F40](#) [FXO12D5-5F10Y](#) [FXO12D5-5F19Y](#) [B96566](#) [FPDK01SCC100](#)
[HFBR-RSD005Z](#) [FX2ELQ1Q1SNM4.5](#) [FX2ELQ1Q1SNM5.5](#) [FX2ELQ1Q1SNM6.5](#) [FX2ELQ1Q1SNM7.5](#) [FX2ELQ1Q1SNM8.5](#)
[FX2ELQ1Q1SNM9.5](#) [FX8RL7NQSVM1.5](#) [FX8RL8NQSVM1.5](#) [FX8RL7NQSVM2.5](#) [FX8RL8NQSVM2.5](#) [FX8RL7NQSVM3.5](#)
[FX8RL8NQSVM3.5](#) [FX8RL7NQSVM4.5](#) [FX8RL8NQSVM4.5](#) [F98RL5NQSQNM1.5](#) [F98RL6NQSQNM1.5](#) [F98RL5NQSQNM2.5](#)
[F98RL6NQSQNM2.5](#) [F98RL5NQSQNM3.5](#) [F98RL6NQSQNM3.5](#) [F98RL5NQSQNM4.5](#) [F98RL6NQSQNM4.5](#) [FZ8RL7NQSVM1.5](#)
[FZ8RL8NQSVM1.5](#) [FZ8RL7NQSVM2.5](#) [FZ8RL8NQSVM2.5](#) [FZ8RL7NQSVM3.5](#) [FZ8RL8NQSVM3.5](#) [FZ8RL7NQSVM4.5](#)
[FZ8RL8NQSVM4.5](#) [F9TRL5NQSSNM1.5](#) [F9TRL5NQSSNM2.5](#) [F9TRL5NQSSNM3.5](#) [F9TRL5NQSSNM4.5](#) [F9TRL6NQSSNM1.5](#)
[F9TRL6NQSSNM2.5](#) [F9TRL6NQSSNM3.5](#) [F9TRL6NQSSNM4.5](#) [FXTRL8NQSONM1.5](#) [FZTRL8NQSONM1.5](#)