

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
-50V	8Ω@-10V	-0.13A
	10Ω@-5V	

Feature

- Advanced trench process technology
- High density cell design for ultra low on-resistance

Application


- Load Switch for Portable Devices
- DC/DC Converter

Package




SOT-23

Circuit diagram

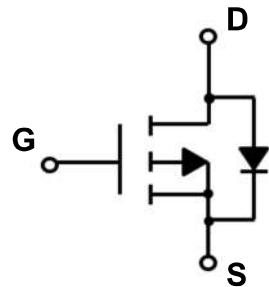

Marking

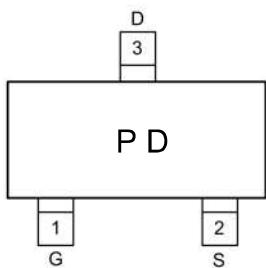

Absolute maximum ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V _{DS}	-50	V
Gate-Source Voltage	V _{GS}	±20	V
Continuous Drain Current	I _D	-0.13	A
Pulsed Drain Current	I _{DM}	-0.52	A
Power Dissipation	P _D	0.225	W
Thermal Resistance Junction to Ambient	R _{θJA}	556	°C/W
Junction Temperature	T _J	150	°C
Storage Temperature	T _{STG}	-55 ~ +150	°C

Electrical characteristics (T_A=25 °C, unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = -250μA	-50			V
Zero gate voltage drain current	I _{DSS}	V _{DS} = -50V, V _{GS} = 0V			-15	uA
Gate-body leakage current	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V			±5	uA
Gate threshold voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250μA	-0.9		-2.0	V
Drain-source on-resistance ¹⁾	R _{DS(on)}	V _{GS} = -10V, I _D = -0.15A			8	Ω
		V _{GS} = -5V, I _D = -0.15A			10	
Dynamic characteristics²⁾						
Input Capacitance	C _{iss}	V _{DS} = 5V, V _{GS} = 0V, f = 1MHz		30		pF
Output Capacitance	C _{oss}			10		
Reverse Transfer Capacitance	C _{rss}			5		
Turn-on delay time	t _{d(on)}	V _{DD} = -15V, V _{GS} = -4.5V, I _D = -0.15A, R _{GEN} = 2.53Ω		2.5		nS
Turn-on rise time	t _r			1		
Turn-off delay time	t _{d(off)}			16		
Turn-off fall time	t _f			8		
Source-Drain Diode characteristics						
Diode Forward Current ¹⁾	I _S				-0.13	A
Diode Forward voltage	V _{DS}	V _{GS} = 0V, I _S = -0.13A			-2.2	V


Notes:

1) Pulse Test: Pulse Width < 300μs, Duty Cycle ≤ 2%.


2) Guaranteed by design, not subject to production testing.

Typical Characteristics


Output Characteristics

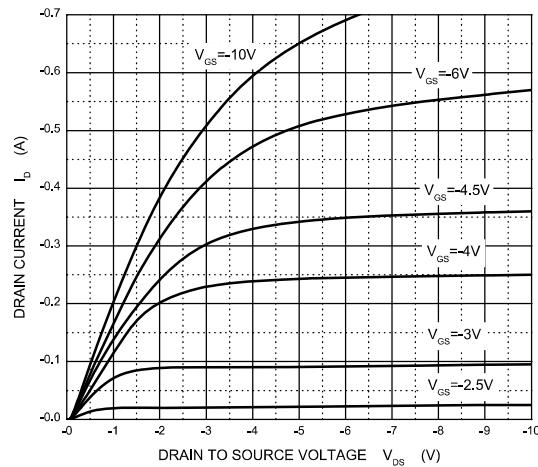


Transfer Characteristics

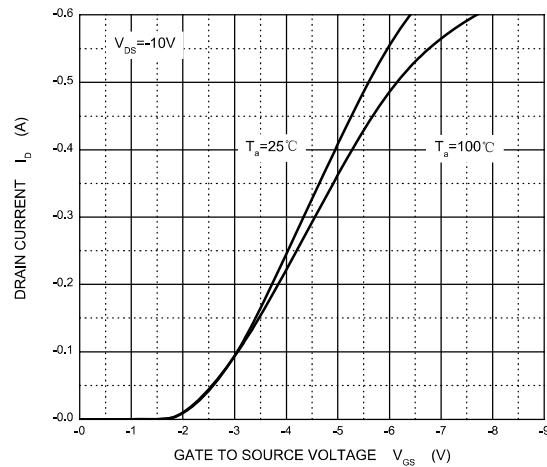


$R_{DS(ON)}$ — I_D

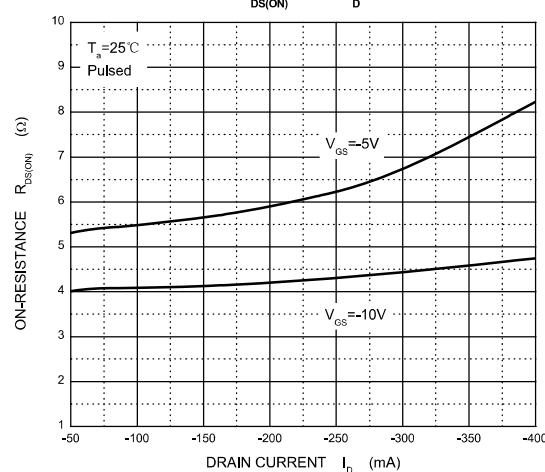


$R_{DS(ON)}$ — V_{GS}



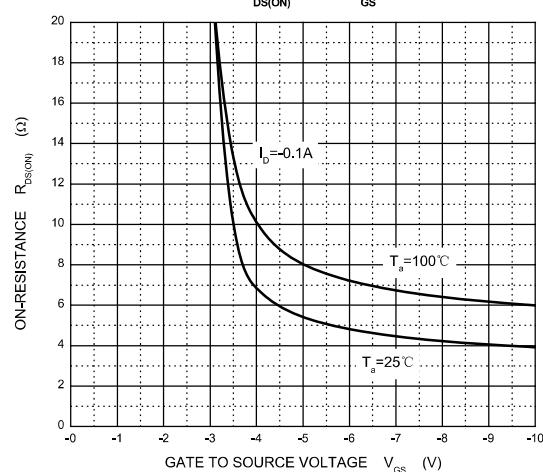


I_S — V_{SD}

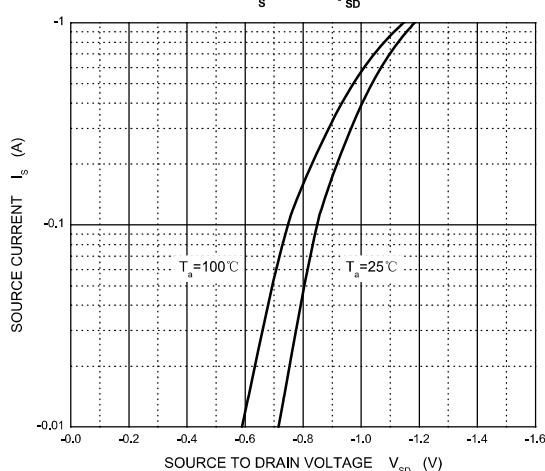

Threshold Voltage

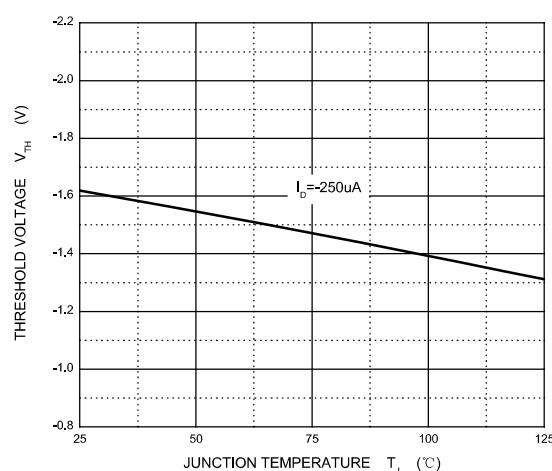

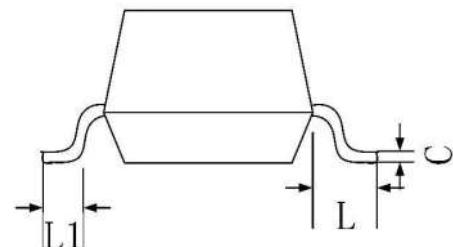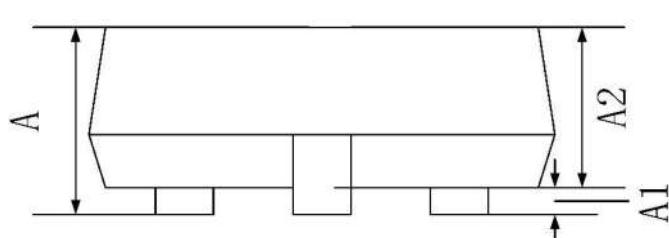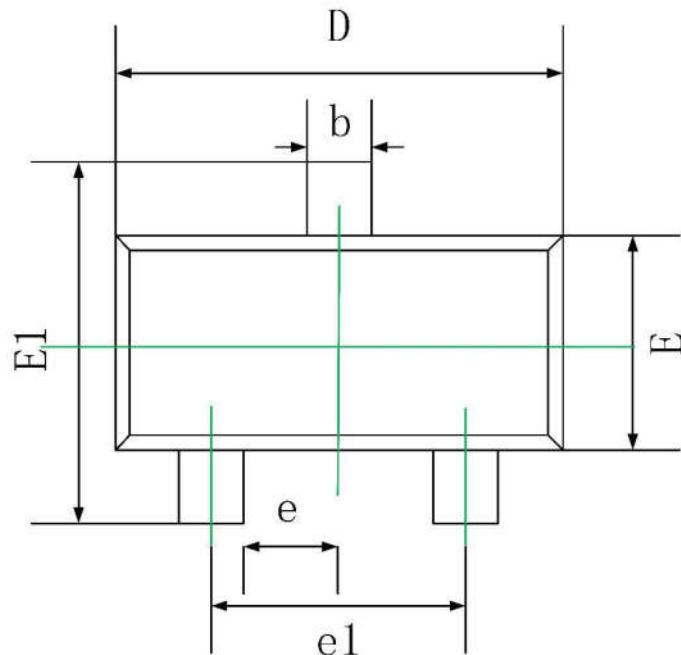SOT-23 Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by FUXINSEMI manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [FCA20N60_F109](#) [FDZ595PZ](#) [AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#)
[405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T\)](#) [751625C](#) [PSMN4R2-30MLD](#)
[TK31J60W5,S1VQ\(O\)](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#)
[NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [STU5N65M6](#) [C3M0021120D](#) [DMN13M9UCA6-7](#)
[BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#) [IRF40SC240ARMA1](#) [IPS60R1K0PFD7SAKMA1](#)
[IPS60R360PFD7SAKMA1](#) [IPS60R600PFD7SAKMA1](#)