



GPSR0750-Series

GPSR系列產品符合“實用新型.貼片式功率電感器”專利,專利號: ZL 2009 2 0129705.8



實物圖:




推薦焊盤:



尺寸: (Unit:mm)





命名方式:

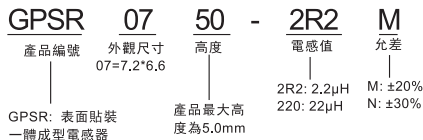

特性參數:

Part Number 型號	Inductance 電感量 (μH) @100KHz, 1V	DC Resistance 直流電阻 (mΩ)		Heat Rating Current 溫升電流(A)	Saturation Current 飽和電流(A)
		典型值 Typical	最大值 Max		
GPSR0750 -R36M	0.36	3.2	3.5	21	25
GPSR0750 -R56M	0.56	3.4	3.6	20	18
GPSR0750 -R68M	0.68	3.9	4.2	18	17
GPSR0750 -R82M	0.82	4.6	4.9	16.5	16
GPSR0750 -1R0M	1	6.5	8.5	10	16
GPSR0750 -1R5M	1.5	8.5	12	8	14
GPSR0750 -2R2M	2.2	11	14	7	12
GPSR0750 -3R3M	3.3	18	22	6.5	11
GPSR0750 -4R7M	4.7	22	30	6	10
GPSR0750 -6R8M	6.8	33	45	4.5	9
GPSR0750 -220M	22	108	140	2.2	4
GPSR0750 -330M	33	160	210	2	4
GPSR0750 -470M	47	192	247	2	3

典型電流重疊與溫升特性曲線

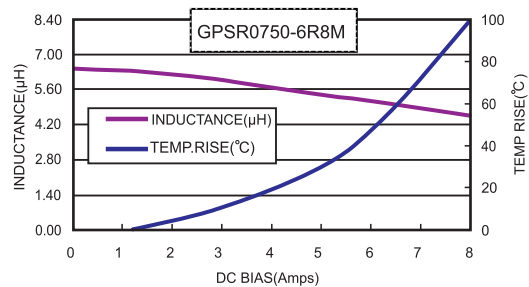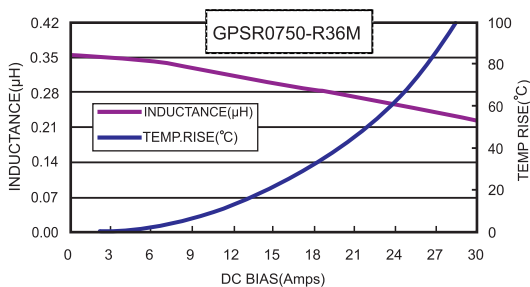

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Gantong](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)