

Lipped, Straight Shrink Boots



770-020S TACOM Qualified Long Tail Boot How to Order



TACOM qualified, lipped long tail straight shrink boots provide mechanical and environmental protection from damage and debris and additional strain relief compared to standard length boots and are available in three material options with five adhesive choices. Glenair straight boots fit most standard boot adapters for circular connectors. All adhesive lined and unlined shrink books are RoHS compliant. Shrink boots are water-tight when equipped with factory installed or user-installed adhesive. Lipped boots lock into boot groove located on adapter and can be ordered with drain holes to fit your requirements. Choose boot size based on adapter diameter and cable diameter.

How to Order										
Sample Part Number	770	-020	S	6	03	W1	-DH			
Product Series	770 = Series 77 shrink boot									
Basic Number	020 = lipped boot, long tail									
Angular Function	S = straight									
Material	See material and adhesives table									
Boot Size	02 , 03 , 04 , 05 , 06 , 07 , 08 , 09 , 10 , 11 ; see dimensions table									
Adhesive Lined	Omit for no adhesive; see material and adhesives table									
Drain Holes	DH = drain hole Omit for none							,		

Material and Adhesive Compatibility										
Material Code			Hot Melt Adhesives	High Performance Epoxy Adhesives						
	Material Description	W1	W2	W3 (TACOM approved)	R	U				
	(Compound No.)	High Temperature -55°C to 125°C	Standard -55°C to 70°C	Elastomeric -55°C to 125°C	Pre-Coat -75°C to 150°C	Two-Part -75°C to 155°C				
5	Viton Fluoroelastomer Blend (2050)	•		•	•	Type U epoxy				
6	High Performance Elastomer Alloy (2051)	•		•		adhesive is compatible with all				
7	Semi-Rigid Polyolefin (2071)	•	•			boot materials.				
						Ordered separately, user-installed (779-001). Order boot with no adhesive lining.				

TACOM Part Number Cross Reference											
Boot Size	Glenair Part Marking	Tacom Ref Part No.	Boot Size	Glenair Part Marking	Tacom Ref Part No.						
02	S02	12273147-1*	07	S07	12273147-6*						
03	S03	12273147-2*	08	S08	12273147-7*						
04	S04	12273147-3*	09	S09							
05	S05	12273147-4*	10	S10							
06	S06	12273147-5*	11	S11							

C-14




Lipped, Straight Shrink Boots



770-020S TACOM Qualified Long Tail Boot Dimensions

Lipped Straight Adapter Shrink Boots, Standard: Dimensions

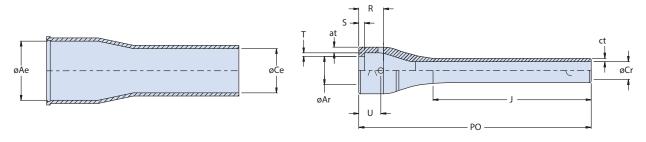


STRAIGHT - AS SUPPLIED

STRAIGHT - RECOVERED

	Dimensions												
Boot Size	Glenair US Part Marking	Ae Dia. Min.	Ce Dia. Max	Ar Dia. Max	at +.02/01	Cr Dia Max	ct ±.015	PO ±10%	S +.06/00	T ±.015	R Min	±10%	U ±10%
02	S02	.940 (23.9)	.680 (17.3)	.390 (9.9)	.060 (1.5)	.260 (6.6)	.060 (1.5)	4.170 (105.9)	.060 (1.5)	.050 (1.3)	.460 (11.7)	3.400 (86.4)	.24 (6.1)
03	S03	1.070 (27.2)	.820 (20.8)	.520 (13.2)	.060 (1.5)	.300 (7.6)	.060 (1.5)	4.770 (121.2)	.060 (1.5)	.050 (1.3)	.480 (12.2)	3.880 (98.6)	.47 (11.9)
04	S04	1.220 (31.0)	.960 (24.4)	.730 (18.5)	.070 (1.8)	.350 (8.9)	.060 (1.5)	5.460 (138.7)	.060 (1.5)	.050 (1.3)	.480 (12.2)	4.440 (112.8)	.47 (11.9)
05	S05	1.400 (35.6)	1.130 (28.7)	.870 (22.1)	.070 (1.8)	.400 (10.2)	.060 (1.5)	6.280 (159.5)	.060 (1.5)	.050 (1.3)	.480 (12.2)	5.150 (130.8)	.47 (11.9)
06	S06	1.530 (38.9)	1.240 (31.5)	1.110 (28.2)	.070 (1.8)	.430 (10.9)	.060 (1.5)	7.000 (177.8)	.060 (1.5)	.070 (1.8)	.550 (14.0)	5.600 (142.2)	.47 (11.9)
07	S07	1.780 (45.2)	1.510 (38.4)	1.270 (32.3)	.070 (1.8)	.500 (12.7)	.060 (1.5)	8.000 (203.2)	.060 (1.5)	.070 (1.8)	.600 (15.2)	6.420 (163.1)	.47 (11.9)
08	\$08	2.030 (51.6)	1.790 (45.5)	1.620 (41.1)	.070 (1.8)	.590 (15.0)	.070 (1.8)	8.000 (203.2)	.070 (1.8)	.070 (1.8)	.600 (15.2)	6.210 (157.7)	.63 (16.0)
09	S09	2.469 (62.7)	2.469 (62.7)	1.850 (47.0)	.100 (2.5)	.690 (17.5)	.070 (1.8)	8.000 (203.2)	.120 (3.0)	.080 (2.0)	1.00 (25.4)	6.00 (152)	.63 (16.0)
10	S10	2.728 (69.3)	2.728 (69.3)	2.350 (59.7)	.100 (2.5)	.770 (19.6)	.070 (1.8)	8.000 (203.2)	.120 (3.0)	.080 (2.0)	1.00 (25.4)	5.60 (142)	.63 (16.0)
11	S11	3.220 (81.8)	3.220 (81.8)	2.642 (67.1)	.100 (2.5)	.900 (22.9)	.070 (1.8)	8.000 (203.2)	.120 (3.0)	.080 (2.0)	1.00 (25.4)	5.40 (137)	.63 (16.0)

For materials Type 2, Type 3 and Type 9, dimension 'Ce' is nominal

Lipped Straight Shrink Boots: Part Marking, Raised Lettering

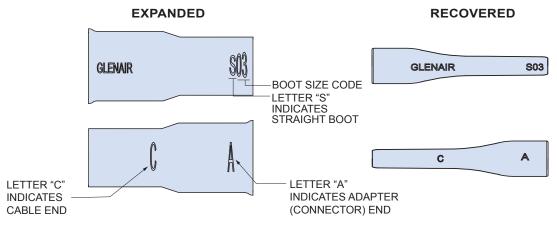

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Heat Shrink Tubing and Sleeves category:

Click to view products by Glenair manufacturer:

Other Similar products are found below:

5685710001 CR9960-000 5734012004 607381P039 611112-000 6284592002 CX4711-000 CZ1420-000 D-306-38 770-006S302 770-010Y106W1 770-018S103 770-018S202W1 770-018S205W1 770-020S704W1 770-020S705 MFP-1/4"-Clear MFP-3/64"-Clear 790-3012 MHHT-4-15K2-G-104 8003012003 MIL-LT-1-1/2-4-SP MIL-LT-1-1/2-9-STK MIL-LT-1/2-2-STK MIL-LT-3-0-SP MIL-LT-3/32-0-SP MIL-LT-3/32-6-SP MIL-LT-3/4-4-STK MIL-LT-3/4-6-SP 839602-000 8423-6 FP301-116-48"-Clear FP301-12-6"-Clear FP301-1/4-48"-White-Hdr FP301-18-48"-Black-Hdr FP301-1/8-6"-Black FP301-18-6"-Black-Bulk FP301-316-48"-Blue-Hdr FP301-34-48"-Green-Hdr 912229N002 R280637030 HDT-0300-48A-BLACK HDT-0400-48A-Black HDT-0800-48A-RED HDT1100-48A-BLK HDT1500-48A-BLK HDT-2000-48A-Black RHW-70/20-1200/ADH-0 DWP-125-0.450-4-55MM-CS879 156082-000