

KBJ8005 THRU KBJ810

SINGLE PHASE 8.0 AMP BRIDGE RECTIFIERS



FEATURES


- * Ideal for printed circuit board
- * Low forward voltage
- * Low leakage current
- * Mounting position: Any

VOLTAGE RANGE

50 to 1000 Volts

CURRENT

4.0 Amperes

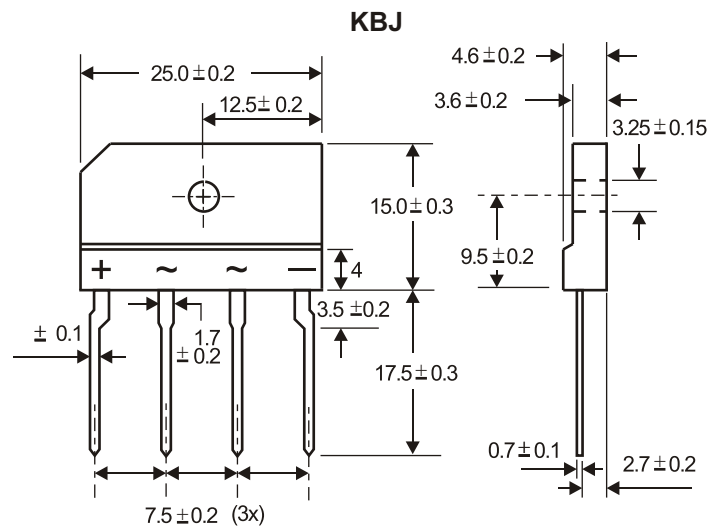

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	KBJ8005	KBJ801	KBJ802	KBJ804	KBJ806	KBJ808	KBJ810	UNITS	
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
Maximum Average Forward (with heatsink Note 1)								8.0	A
Rectified Current at T _c =110°C (Without heatsink)								2.9	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)								170	A
Maximum Forward Voltage Drop per Bridge Element at 4.0A D.C.								1.0	V
Maximum DC Reverse Current T _a =25°C								5.0	µA
at Rated DC Blocking Voltage T _a =100°C								500	µA
Typical Thermal Resistance R _{jc} (Note 2)								2.8	°C/W
Typical Thermal Resistance R _{jl} (Note 3)								5.5	°C/W
Operating Temperature Range, T _J								-55 — +150	°C
Storage Temperature Range, T _{STG}								-55 — +150	°C

NOTES

1. Device mounted on 100mm x 100mm x 1.6mm Cu Plate Heatsink.
2. Thermal Resistance from Junction to Case with device mounted on 100mm x 100mm x 1.6mm Cu Plate Heatsink.
3. Thermal Resistance from Junction to Lead without Heatsink.

RATING AND CHARACTERISTIC CURVES (KBJ8005 THRU KBJ810)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

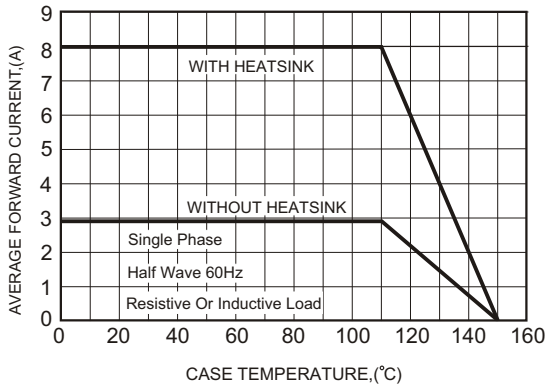


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

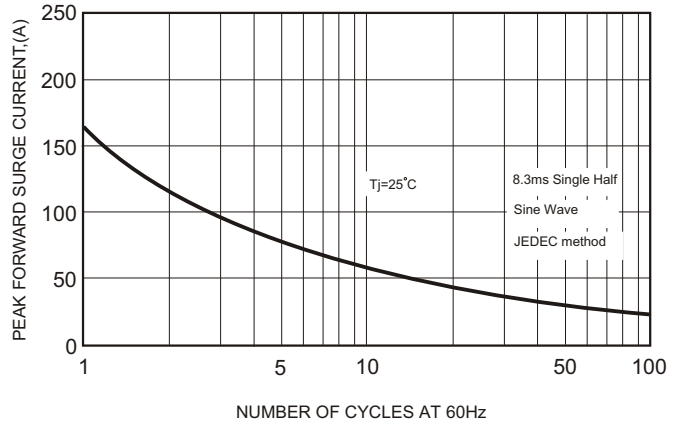


FIG.3-TYPICAL FORWARD CHARACTERISTICS


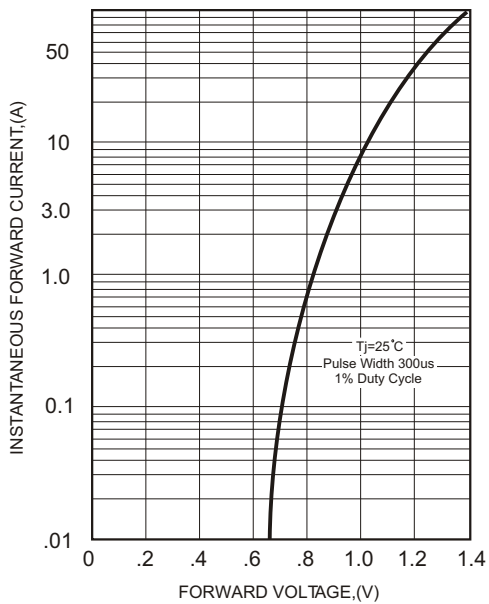


FIG.4-TYPICAL REVERSE CHARACTERISTICS

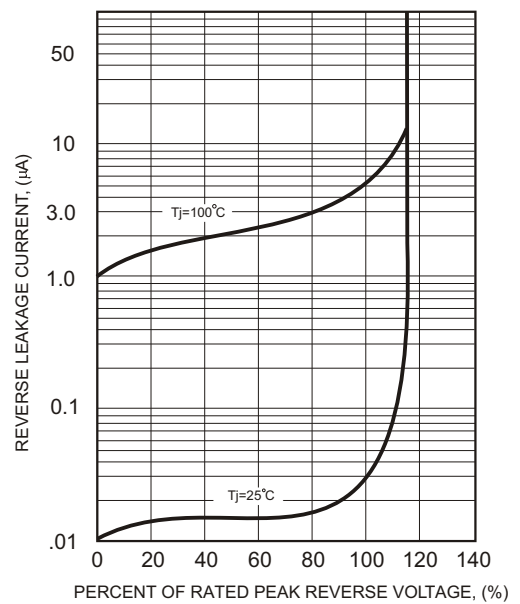

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [GOODWORK](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [MP358-BP](#) [90MT160KPBF](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#)
[GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DBA100G](#) [DBA40G](#) [DBF250G](#) [DF01](#) [DF10SA-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [KBPC50-](#)
[10S](#) [RS405GL-BP](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBU10J-BP](#) [GBU6M](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [TB102M](#) [MB1510](#)
[MB6M-G](#) [MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BR84DTP204](#) [BU1010A-E3/51](#)
[BU1508-E3/51](#) [BU2008-E3/51](#) [US15KB80R-7000](#) [KBPC25-02](#) [VS-2KBB60](#) [VS-60MT120KPBF](#)