

## Han PP PFT plastic rect. crimp power



Image is for illustration purposes only. Please refer to product description.

Part number	09 35 231 0331
Specification	Han PP PFT plastic rect. crimp power
HARTING eCatalogue	<a href="https://b2b.harting.com/09352310331">https://b2b.harting.com/09352310331</a>

### Identification

Category	Connectors
Series	Han <sup>®</sup> PushPull (V14)
Identification	Power
Element	Panel feed trough set
Features	Intuitive locking mechanism

### Version

Termination method	Crimp termination
Shielding	Unshielded
Number of contacts	5
Locking type	PushPull
Pack contents	incl. bulkhead mounted housing and male insert Without contacts

### Technical characteristics

Conductor cross-section	0.25 ... 2.5 mm <sup>2</sup>
Conductor cross-section	AWG 22 ... AWG 12
Rated current	16 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Limiting temperature	-40 ... +70 °C



Pushing Performance

## Technical characteristics

Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65 IP67
Vibration resistance	5-150 Hz, 5 g, 0.35 mm, 2h/axis
Shock resistance	5 g / 30 ms, 3 shocks / axis and direction

## Material properties

Surface (contacts)	Silver plated
Material (hood/housing)	Thermoplastic
Colour (hood/housing)	Black
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	No
California Proposition 65 substances	Yes
California Proposition 65 substances	Naphthalene

## Specifications and approvals

Specifications	IEC 61076-3-118 EN 45545-2 R22: HL1, HL2, HL3 EN 45545-2 R23: HL1, HL2, HL3
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E235076 CSA-C22.2 No. 182.3 ECBT8.E235076


## Commercial data

Packaging size	1
Net weight	10.22 g
Country of origin	Germany
European customs tariff number	85366990
eCl@ss	27440101 Rectangular connectors (set)

### Current carrying capacity


The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

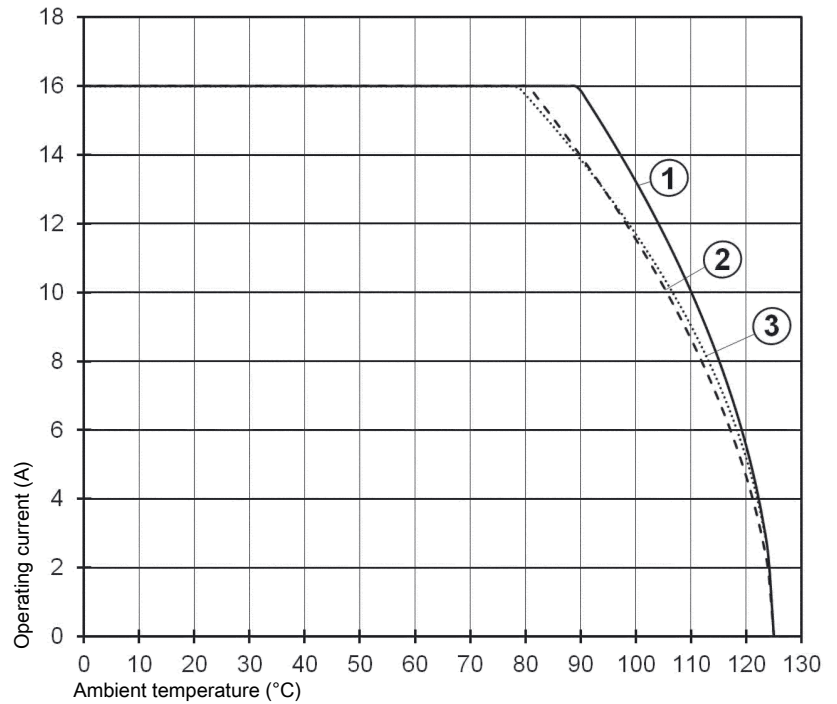

- ① Crimp termination
  - ② Han-Quick Lock<sup>®</sup> termination
  - ③ Solder termination
- Conductor cross-section 2.5 mm<sup>2</sup>

### Mating face



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Heavy Duty Power Connectors](#) category:*

*Click to view products by [HARTING](#) manufacturer:*

Other Similar products are found below :

[647757-1](#) [6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#)  
[6651788-1](#) [696475-1](#) [73000005059](#) [73000005642](#) [765-15-0080A](#) [765-16-0080B](#) [829992-1](#) [902-77-02113](#) [129-1J](#) [AN0024023](#) [E6374G1](#)  
[e6389g2](#) [157-43GW8](#) [MS3117-14AC](#) [1643543-1](#) [1650540-1](#) [1651811-2](#) [1766260-1](#) [1766282-1](#) [1766966-1](#) [1791340000](#) [NLDFT-3-BL-L-](#)  
[S120-M40A](#) [NLDFT-N-W-L-C240-M40B](#) [NLS-2-R-C240-M40B](#) [NLS-N-W-C240-M40B](#) [NPS-3-BL-T6](#) [1986615-1](#) [2-1589900-8](#) [2199314-1](#)  
[KA8102](#) [9300480317](#) [SBS50BRN#6](#) [29131](#) [29652](#) [1646905-1](#) [1648320-1](#) [1648582-1](#) [1650195-2](#)