

Han PP Signal 10-pole plug set, metal



Image is for illustration purposes only. Please refer to product description.

Part number	09 35 261 0401
Specification	Han PP Signal 10-pole plug set, metal
HARTING eCatalogue	https://b2b.harting.com/09352610401

Identification

Category	Connectors
Series	Han [®] PushPull (V14)
Identification	Signal
Element	Connector sets
Specification	AIDA compliant
Features	Intuitive locking mechanism

Version

Termination method	Crimp termination
Shielding	Fully shielded, 360° shielding contact
Number of contacts	10
Locking type	PushPull
Details	When installing a PROFINET system, observe the PROFINET installation guideline.
Pack contents	incl. metal housing and female insert

Technical characteristics

Conductor cross-section	0.13 ... 0.82 mm ²
Conductor cross-section	AWG 26 ... AWG 18
Wire outer diameter	≤2.1 mm
Contact spacing (termination side)	2.4 mm 3 mm
Contact spacing (mating side)	2.4 mm 3 mm



Pushing Performance

Technical characteristics

Rated current	5 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Clearance distance	≥1.1 mm
Creepage distance	≥1.1 mm
Insulation resistance	>10 ⁹ Ω
Contact resistance	≤10 mΩ
Limiting temperature	-40 ... +85 °C
Insertion force	50 N
Withdrawal force	50 N
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65 IP67
Cable diameter	4 ... 11 mm
Test voltage U _{r.m.s.}	1.5 kV (contact-contact) 1.5 kV (contact-ground)
Vibration resistance	10-500 Hz, 5 g, 0.35 mm, 10 sweep cycles acc. to IEC 61373 Category 1 Class B
Shock resistance	50 g / 11 ms, 10 shocks / axis and direction

Material properties

Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Nickel plated
Material (O-ring)	NBR
Material (cable seal)	TPE
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead

Material properties

California Proposition 65 substances	Yes
California Proposition 65 substances	Nickel
	Lead

Specifications and approvals

Specifications	IEC 61076-3-117 Variant 14 (V14) IEC PAS 61076-3-119 Mating face EN 45545-2 R22: HL1, HL2, HL3 EN 45545-2 R23: HL1, HL2, HL3
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E102079 CSA-C22.2 No. 182.3 ECBT8.E102079
PROFINET	Yes


Commercial data

Packaging size	10
Net weight	83.64 g
Country of origin	Romania
European customs tariff number	85366990
eCl@ss	27440101 Rectangular connectors (set)

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

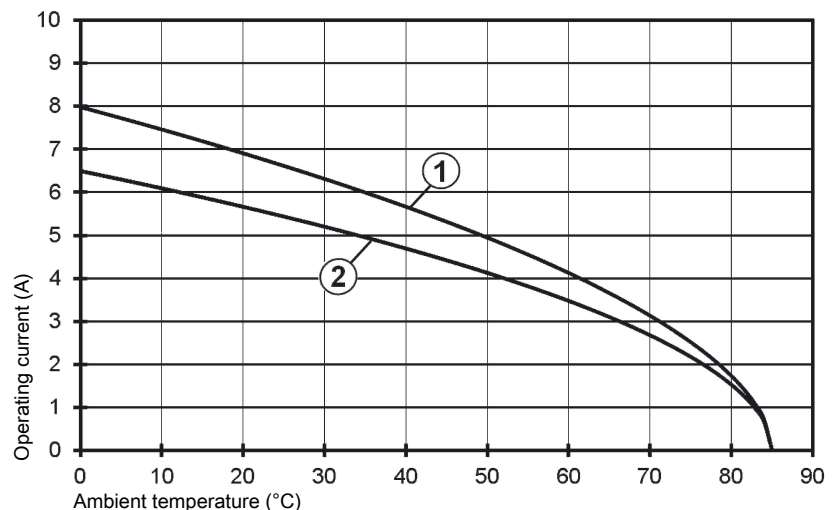

- ① Turned
 - ② Stamped
- Conductor cross-section 0.75 mm²




Pushing Performance

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

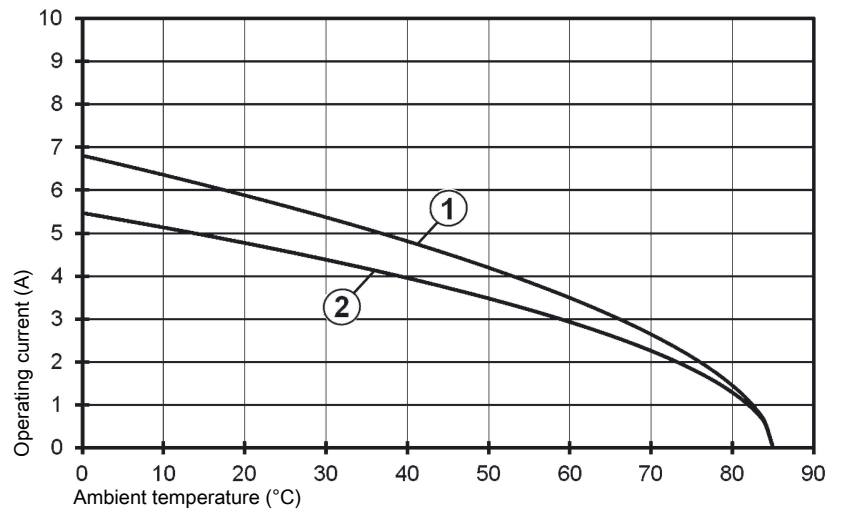

- ① Turned
 - ② Stamped
- Conductor cross-section 0.5 mm²

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heavy Duty Power Connectors](#) category:

Click to view products by [HARTING](#) manufacturer:

Other Similar products are found below :

[647757-1](#) [6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#)
[6651788-1](#) [696475-1](#) [73000005059](#) [73000005642](#) [765-15-0080A](#) [765-16-0080B](#) [829992-1](#) [902-77-02113](#) [129-1J](#) [AN0024023](#) [E6374G1](#)
[e6389g2](#) [157-43GW8](#) [MS3117-14AC](#) [1643543-1](#) [1650540-1](#) [1651811-2](#) [1766260-1](#) [1766282-1](#) [1766966-1](#) [1791340000](#) [NLDFT-3-BL-L-](#)
[S120-M40A](#) [NLDFT-N-W-L-C240-M40B](#) [NLS-2-R-C240-M40B](#) [NLS-N-W-C240-M40B](#) [NPS-3-BL-T6](#) [1986615-1](#) [2-1589900-8](#) [2199314-1](#)
[KA8102](#) [9300480317](#) [SBS50BRN#6](#) [29131](#) [29652](#) [1646905-1](#) [1648320-1](#) [1648582-1](#) [1650195-2](#)