

PCB recept housing and insert fr fem 1pc



Image is for illustration purposes only. Please refer to product description.

Part number	21 03 396 2531
Specification	PCB recept housing and insert fr fem 1pc
HARTING eCatalogue	https://b2b.harting.com/21033962531

Identification

Category	Connectors
Series	Circular connectors M12
Identification	Power
Element	PCB adapter
Specification	Straight incl. housing for front mounting

Version

Termination method	Reflow soldering termination (THR)
Gender	Female
Shielding	Shielded
Number of contacts	4
FE contact	Yes
Coding	L-coding
Locking type	Screw locking

Technical characteristics

Rated current	16 A
Rated voltage	63 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Overvoltage category	III
Insulation resistance	>10 ⁸ Ω



Pushing Performance

Technical characteristics

Contact resistance	≤10 mΩ
Tightening torque	2 Nm Lock nut
Ambient temperature	-40 ... +85 °C
Mating cycles	≥100
Degree of protection acc. to IEC 60529	IP65 / IP67 mated condition
Isolation group	I (600 ≤ CTI)

Material properties

Material (insert)	Polyamide (PA)
Colour (insert)	Grey
Material (contacts)	Copper alloy
Surface (contacts)	Au over Ni Mating side
Material (hood/housing)	Zinc die-cast
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Yes
REACH SVHC substances	Lead
ECHA SCIP number	0d7d3693-d625-47ab-934a-d241bf72c86e
California Proposition 65 substances	Yes
California Proposition 65 substances	Nickel Lead

Specifications and approvals

Specifications	IEC 61076-2-111
PROFINET	Yes

Commercial data

Packaging size	1
Net weight	30.33 g


Commercial data

Country of origin	Romania
European customs tariff number	85366990
eCl@ss	27460201 PCB connector (board connector)

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

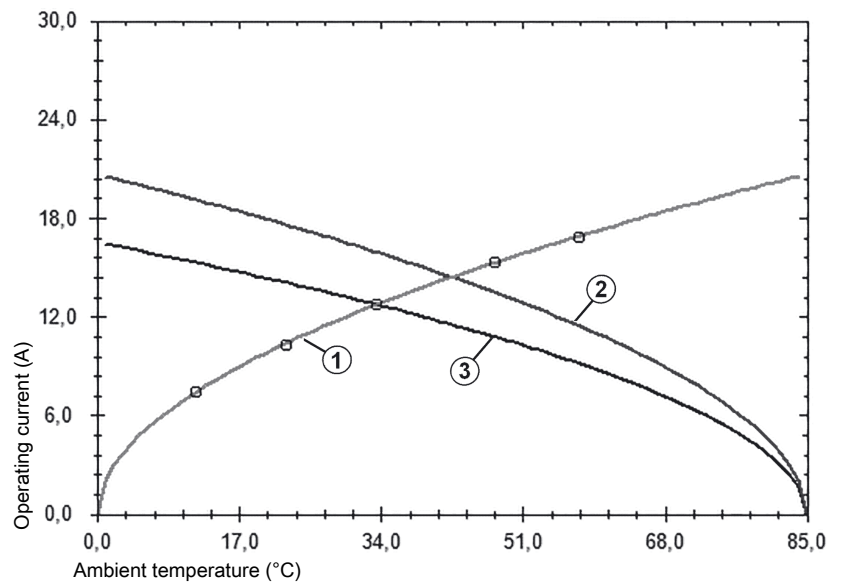

- ① Heating
 - ② Derating curve
 - ③ Derating curve 80%
- Conductor cross-section 1.5 mm²

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [HARTING](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)
[130203-0054](#) [1300140026](#) [1300150099](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [1R3006A20M005](#) [41-40011](#) [42-00006](#)
[42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01026](#) [43-01162](#) [43-01173](#) [43-10000](#)
[XS3P-M421-2](#) [600X518050X](#) [8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-](#)
[16213](#) [43-01338](#) [XS2RD4265](#) [XS2R-D426-1](#) [XS8A-0441](#) [859RD04-103R004](#) [860RD04-113R004](#) [860RD04-213R004](#) [1-213245-2](#)