







**SPECIFICATIONS**

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

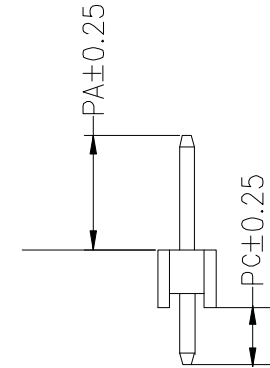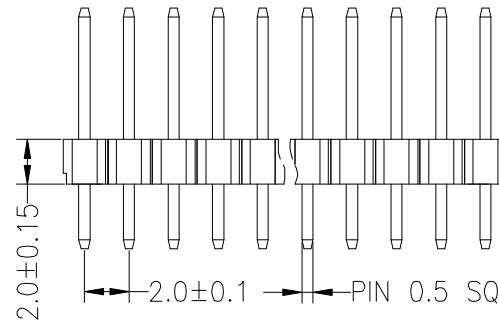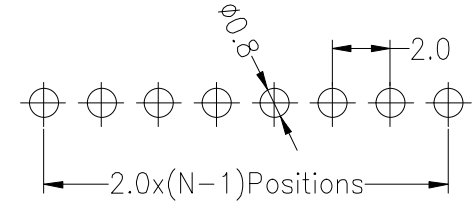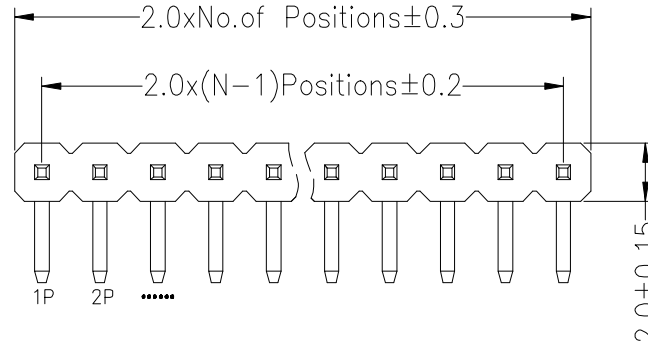

| Dimension antitheses list |      |      |  |      |
|---------------------------|------|------|--|------|
| ITEM                      | PA   | PC   |  | L    |
| Standard                  | 4.00 | 2.80 |  | 8.70 |
| Alternate                 |      |      |  |      |

|     |      |                          |  |           |       |         |           |          |       |                                |               |  |
|-----|------|--------------------------|--|-----------|-------|---------|-----------|----------|-------|--------------------------------|---------------|--|
|     |      |                          |  | OPERATION |       | DRAW    | YiYuSheng | 12.10.10 | SCALE | FIT                            | 深圳市华灿天禄电子有限公司 |  |
|     |      |                          |  | X.X       | ±0.30 |         |           |          | UNIT  | mm                             |               |  |
|     |      |                          |  | X.XX      | ±0.20 | CHECK   |           | SIZE     | A4    | PART NO.                       |               |  |
|     |      |                          |  | X.XXX     | ±0.10 |         |           |          |       | PZ200-1-N-Z                    |               |  |
|     |      |                          |  | Angle     | ±3°   | APPROVE |           | SHEET    | 1/1   | TITLE:                         |               |  |
|     |      |                          |  | DIM       | TOL   |         |           |          |       | 2.0PH 1xNpin H2.0mm Single 90° |               |  |
| REV | DATE | MODIFICATION DESCRIPTION |  | CHANGE    |       |         |           | PROJ.    |       |                                |               |  |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [HCTL](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [00-9021-0611-00-339](#) [02.125.8002.8](#) [609-3404](#)  
[61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-](#)  
[047](#) [65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#) [M90C108951C](#) [70.362.1628.0](#)  
[70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [FCN-367T-](#)  
[T012/H](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-001000](#)