


Specification Sheet

Part Number: T18R6M4

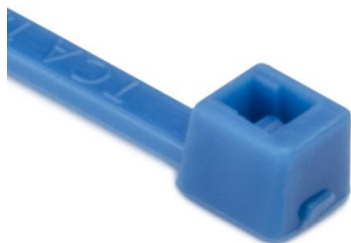

Cable Tie, 4" Long, UL Rated, 18lb Tensile Strength, PA66, Blue, 1000/pkg

Article Number 111-01845

Type T18R

Color Blue (BU)

Features & Benefits

- Inside serrations allow for strong grip on cables and wire bundles.
- Head design provides high tensile strength with very low insertion force.
- Bent tail ensures a quick and simple installation.

Quantity Per bag

Product Description

T-Series Cable Ties feature inside serrations to provide a positive hold on wire and cable bundles. The head design guarantees high tensile strength and a low insertion force. The bent tail design allows quick and simple installations by hand. For high-volume applications, tensioning tools are available to ensure consistent and safe installation.

Short Description	Cable Tie, 4" Long, UL Rated, 18lb Tensile Strength, PA66, Blue, 1000/pkg
Global Part Name	T18R-PA66-BU
Minimum Tensile Strength (Imperial)	18.0
Minimum Tensile Strength (Metric)	80.0
Length L (Imperial)	4.0
Length L (Metric)	100.0
Identification Plate Position	none
Releasable Closure	No
Tie Closure	plastic pawl
Variant	Inside Serrated
Width W (Imperial)	0.10
Width W (Metric)	2.5
Bundle Diameter Min (Imperial)	0.06
Bundle Diameter Min (Metric)	1.5
Bundle Diameter Max (Imperial)	0.87

Bundle Diameter Max (Metric)	22.0
Thickness T (Metric)	1.0
Height H (Metric)	3.7
Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66
US MIL SPEC	SAE-AS33671 MS3367-4-6, Class 1
Flammability	UL 94 V2
Halogen free	Yes
Operating Temperature (Metric)	-40°F to +185°F (-40°C to +85°C)
ROHS Complaint	Yes
Certification/Specification WEB	CAGE Code 53421
UL Recognized (US)	Yes
UL Listed (US and Canada)	Yes
UL Recognized (US and Canada)	Yes
UL Listed (US)	Yes

Package Quantity(Imperial) 1000

Package Quantity (Metric) 1000

Customs Number 3926909988

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Hellermann](#) manufacturer:

Other Similar products are found below :

[T18RPOCKETPAC](#) [380-03003](#) [406064A](#) [TSR1I-21](#) [TSR1I-29](#) [TSR1I-33](#) [TSR1I-36](#) [105-4JW8](#) [MS3109-12AU](#) [Q30LR-PA66-BK-C1](#) [Q18I-PA66-NA-C1](#) [Q18R-PA66-NA-C1](#) [CTQM5-PA66-BK-C1](#) [308-10600](#) [T50IDH0C2](#) [AS25](#) [T18MR-NAT\(100 PACK\)](#) [T120L.NN2P](#) [MK7.9A](#) [181-50840](#) [621-10405](#) [TWT2](#) [G51P-A-PE-NA](#) [E4500](#) [GT.50X66P2](#) [TSRI-JB2](#) [111-01626](#) [SBS4 NATURAL](#) [SBPEFR4-PE-BK-30M](#) [308-30421](#) [309-65129](#) [309-65213](#) [309-65298](#) [309-65164](#) [HIS-3-9/3-PEX-BU](#) [HIS-3 6/2 BRN](#) [HGDC1-3CC/7](#) [HEGPA6612 GREY](#) [T50RS5.NB3P](#) [T150M-NAT](#) [HG1-3](#) [HIS-3 3/1 BLU](#) [HGDC2-5BW/N](#) [HGDC2-5BW/L](#) [TSR1I-25](#) [RSB3](#) [RT250XL9X2](#) [SLHD3X2G4](#) [SFC3-NAT\(100 PACK\)](#) [182-69000](#)