



Fittings for metallic conduits with plastic coating and metallic overbraid

- PCSB-SMC Swivel Thread Compression Fitting, IP65

Swivel external thread, nickel plated brass.

Fulfils IP65.


Features and Benefits

- Multipart compression fitting including elastomeric seal
- Braid is locked between inner and outer compression nuts
- Provides very good electrical continuity
- Provides excellent tensile strength
- Can be used for knockouts or threaded entries as fitting rotates until tightened
- External thread swivels about main body even after tightening



HeloGuard PCSB-SMC Swivel Compression Fitting.

MATERIAL	Nickel Plated Brass (NPB), Polyamide 6 (PA6)
Operating Temperature	-40 °C to +135 °C

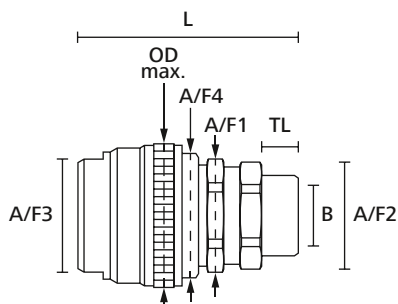

HeloGuard compression fitting, straight with swivel external thread

TYPE	Nominal Ø	Thread Size	Min. Bore Size (B)	Length (L)	Outside Ø max (OD max.)	A/F Body (A/F1)	A/F Thread (A/F2)	A/F Nut (A/F3)	A/F Inner Nut (A/F4)	Thread Length (TL)	Pack Cont.	Colour	Article-No.
PCSB16-SMC-M16	16	M16	11.5	55.0	32.6	24	20	24	26	10.0	10 pcs.	Metal (ML)	166-34200
PCSB16-SMC-M20	16	M20	11.5	55.0	32.6	24	24	24	26	10.0	10 pcs.	Metal (ML)	166-34201
PCSB20-SMC-M20	20	M20	15.3	57.0	35.6	26	26	28	29	10.0	10 pcs.	Metal (ML)	166-34202
PCSB25-SMC-M25	25	M25	19.1	65.0	41.8	33	33	34	36	12.0	10 pcs.	Metal (ML)	166-34203
PCSB32-SMC-M32	32	M32	26.0	71.0	48.6	40	40	41	42	13.0	2 pcs.	Metal (ML)	166-34204

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Conduit Fittings & Accessories](#) category:

Click to view products by [HellermannTyton](#) manufacturer:

Other Similar products are found below :

[M3231GAB](#) [M3231GAC](#) [M3231GAE](#) [M3231GL](#) [M3231GN](#) [M3231GT](#) [VC-937-16/RED](#) [VC-562-16/RED](#) [VC-1125-16/RED](#) [DM0240-1/2A](#) [3408B](#) [G6002](#) [M4340GAE](#) [G6003](#) [C2016-P](#) [C2012-P](#) [3407B](#) [1660-P](#) [561-87BG11BLK](#) [561-75BG11B](#) [1.511.1601.14](#) [BVBV-P366](#) [VC-687-16/RED](#) [2276](#) [2663-P](#) [3405B](#) [C2070-P](#) [3582V](#) [2643-P](#) [4975](#) [2644-P](#) [920296](#) [2955](#) [M50](#) [2404-P](#) [C2008-P](#) [2723-P](#) [2291](#) [2133-P](#) [3048F](#) [VC12516](#) [RC156-0500](#) [DM0523-1/2A](#) [1035A](#) [DMS0250-1A](#) [DMS0313-1A](#) [1040A](#) [1050A](#) [R1/8A](#) [DMPC0490-1/2A](#) [DMPC0521-1/2A](#)