

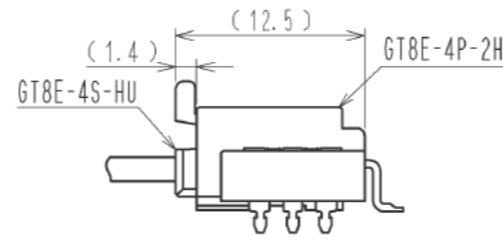





ELV. RoHS COMPLIANT

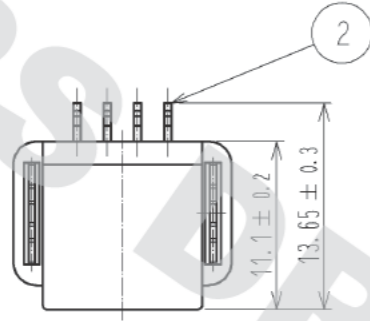

MATING CONFIGURATION

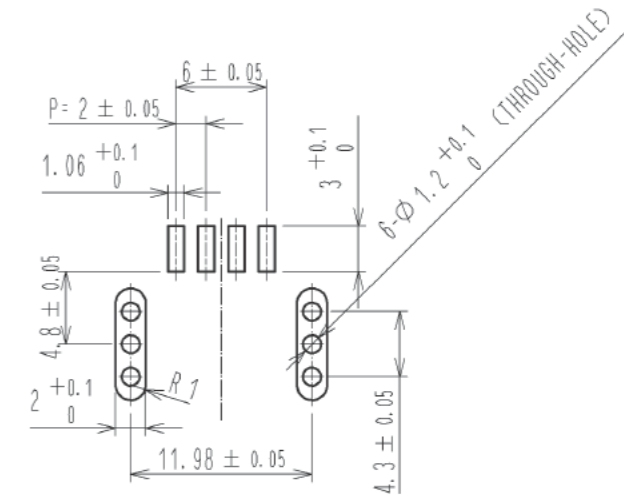


RECOMMENDED PC BOARD PATTERN

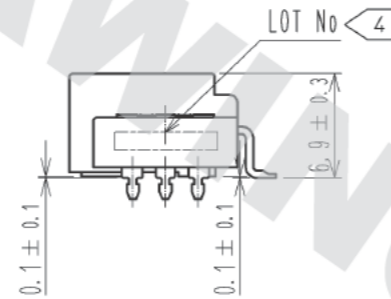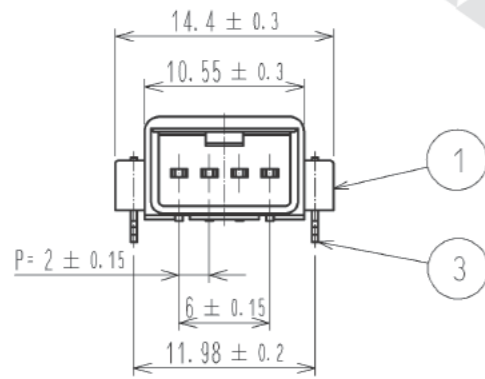


PACKING STYLE

1. Place connectors into an embossed carrier tape.

← DIRECTION OF UNREELING

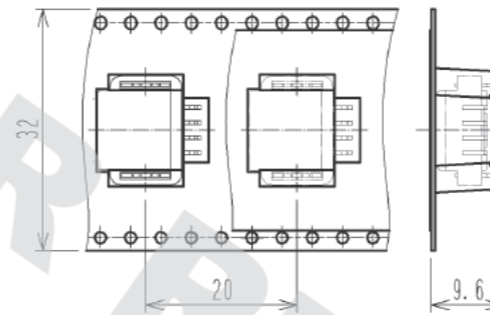


2. Put a reel into a cardboard.



W = (405) (mm)
D = (405) (mm)
H = (39) (mm)

PRODUCTS DIRECTION

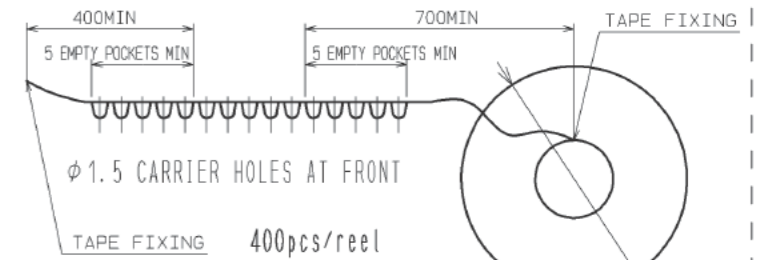


NOTE 1. RECOMMENDED TEMPERATURE PROFILE FOR REFLOW (REFER TO RIGHT FIG.)
REFLOW HEATING METHODS: FAR-INFLARED, IN THE AIR OR NITROGEN

REFLOW No. : MAX 2TIMES
PEAK TEMPERATURE : 250°C
ABOVE 230°C : 20~40s
PREHEAT : 150~180°C
60~120s

2. SOLDERING TEMPERATURE : 280~300°C, MAX 2s
3. COPLANARITY OF LEADS SHALL BE UNDER 0.1mm.

4. MARKING OF LOT No. :
(EX) 2008. 2ND. JULY → 08G02...5DIGITS

5. RECOMMENDED THICKNESS FOR PC BOARD IS 1.6mm.
6. RECOMMENDED THICKNESS FOR SOLDER PASTE IS 0.15mm.

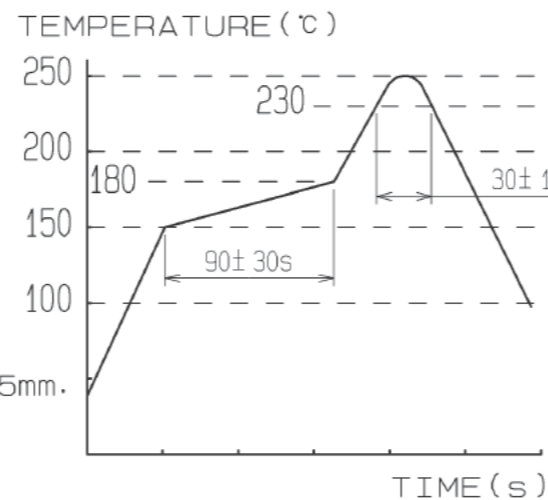

2	BRASS	TIN-COPPER ALLOY PLATING					
1	PPS	BLACK	3	BRASS	TIN-COPPER ALLOY PLATING		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS	mm	SCALE	2 : 1	COUNT	3	DESCRIPTION OF REVISIONS	DESIGNED
						DIS-T-002745	HH. TSUKUMO
							CHECKED
							NA. HARUBAYASHI
							DATE
							12. 05. 30
APPROVED : AR. SHIRAI		10. 10. 19		DRAWING NO.		EDC3-167409-01	
CHECKED : NH. NAKATA		10. 10. 18		PART NO.		GT8E-4P-2H	
DESIGNED : NA. HARUBAYASHI		10. 10. 18		CODE NO.		CL758-0079-5-00	
DRAWN : Chinoik. Ng		10. 10. 18					

DRAWING FOR REFERENCE: This is subject to change without notice
05/31/2013

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Connectors](#) category:

Click to view products by [Hirose](#) manufacturer:

Other Similar products are found below :

[003-018-000](#) [60403001](#) [60993906-B](#) [M902-2131](#) [M902-2161](#) [72.330.1035.1](#) [73.353.4028.0](#) [F119300-B](#) [F166900](#) [F258300-B](#) [F358300-B](#)
[F407400](#) [F444110](#) [F487000](#) [F509500B-B](#) [827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#) [964562-4](#) [968782-1](#) [GT17SA-8DS-](#)
[HU](#) [98891-1012](#) [98947-1016](#) [12004475-L](#) [12010290](#) [12010309-B](#) [12015454](#) [12020219-B](#) [12020308](#) [12041318-B](#) [12052225-L](#) [12052466](#)
[12059125](#) [12064869](#) [12004327-B](#) [12010503-B](#) [12015308](#) [12015384](#) [12015909](#) [1-21030-1](#) [12041254](#) [12041318](#) [12047946-B](#) [12047957](#)
[12047957-L](#) [12059473](#) [12066261](#) [12110546](#)