

HRS

HR41A Series

IP68 Small Plastic Power Connector



Optimized for
Outdoor Use


◆ Features

1. IP68* weather-resistant waterproof connector for outdoor use
2. Higher lightning surge protection (15 kV) and withstanding voltage
3. Snap-in mating with user-friendly push-on bayonet lock
4. Bayonet assembly eliminates torque management and re-tightening of screw
5. Easy field assembly
6. UL, TÜV pending

*Our test condition: No water intrusion, while submerged in 2 m water depth for 14 days in mated condition.


◆ Small Size

- Plug (HR41A-17WBP-5SC)

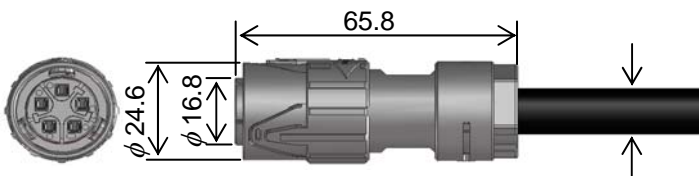


Cable Size: ϕ 10.7 to 11.5
 ϕ 9.0 to 9.8 (Under development)
 ϕ 8.2 to 9.0 (Under development)

- Receptacle (HR41A-17WBRA-5PC)

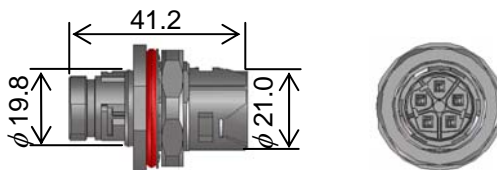

- Jack (HR41A-17WBJ-5PC)

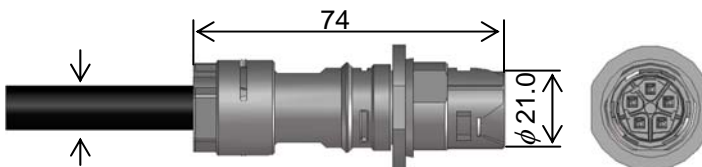

Cable Size: Same as plug

- Crimping Tool

Part No.: HT802/HR41A-11-16(AWG#16)
 HT802/HR41A-11-18(AWG#18)
 HT802/HR41A-11-20(AWG#20)

- Contact Extraction Tool Part No.: HR41A-TP

Component	Material	Finish / Remarks
Housing	PBT	UL94V-0, Black
Contact	Phosphor Bronze	Gold Plating
Clamp	Polyamide Resin	UL94V-0, White
O-ring, Gasket	Silicone Rubber	-
Washer	Stainless Steel	-

Rated Voltage	AC 250V, DC 350V
Rated Current	10 Amps
Operating Temperature	-40°C to +105°C
Contact Resistance	5m Ω Max. (1A)
Insulation Resistance	5000M Ω Min. (DC500V)
Withstanding Voltage	AC 2200V, 1 minute
Durability	500 times
Water Resistance	IP68 (Our test condition: No water intrusion, while submerged in 2 m water depth for 14 days in mated condition.)

Specifications herein are subject to change without notice. Contact Hirose for latest specifications, drawings or availabilities.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Circular Connector](#) category:

Click to view products by [Hirose](#) manufacturer:

Other Similar products are found below :

[5M2530B10P](#) [600259N006](#) [600273N007](#) [6134-336-13149](#) [6134-337-11149](#) [6134-337-2390](#) [6134-341-17149](#) [6280-4SG-516](#) [6280-7SG-3DC](#)
[6290](#) [6291A](#) [66200A-10](#) [680-SMG](#) [681-PMG](#) [CXS3102A14S2P](#) [CXS3102A181S](#) [7251-6SG-300](#) [7271-6SG-300](#) [7282-3PG-300-CH3](#) [75-](#)
[474014-05S](#) [75-474618-01S](#) [75-474618-04S](#) [799539-000](#) [MI8-SE](#) [805-005-07NF11-19PC](#) [805-005-07NF15-7PA](#) [8280-4PG-516](#) [8280-7PG-](#)
[519](#) [8282-5PG-519](#) [836783-1](#) [MP-4102-25P-C](#) [862256-1](#) [864019-2](#) [866857-1](#) [867865-1](#) [PT01SP-14-18P](#) [PT08P-14-5S](#) [PTSF06SE-14-12S](#)
[120-1833-000](#) [QCM019PC2DC012B](#) [1-2069279-1](#) [121583-0217](#) [121667-0020](#) [129591AU](#) [1000B BULK](#) [RD10A16-19-P6CS051/1](#)
[RD10A20-31-P8CS051/1](#) [RD16A14-12-S6CS051/2](#) [1301240290](#) [1301240347](#) [1301860202](#)