



Φ5.2x20mm RoHS Compliant & Pb-Free
CERAMIC TUBE FUSE (TIME-LAG)
瓷保险丝管 (慢断型)


BREAKING CAPACITY/ 分断能力:

200A amperes at 500V AC
100A amperes at 600V AC
1,500 amperes at 400V DC (2A-3.15A) Time Constant ≤ 1ms
500 amperes at 400V DC (4A-10A) Time Constant ≤ 1ms
400 amperes at 400V DC (12A-16A) Time Constant ≤ 1ms


Dimensions/ 尺寸:

Unit 单位: mm

5HT



5HT(P)

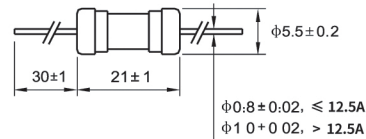

Standards/ 标准: IEC 60127 GB 9364

Operating Temperature/ 工作温度: -55°C ~125°C


Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max

Solderability/ 可焊性: 245°C ±5°C, 5s±0.5s

**5HT AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)**

5HT 平均 I-T 曲线图 (仅供参考)

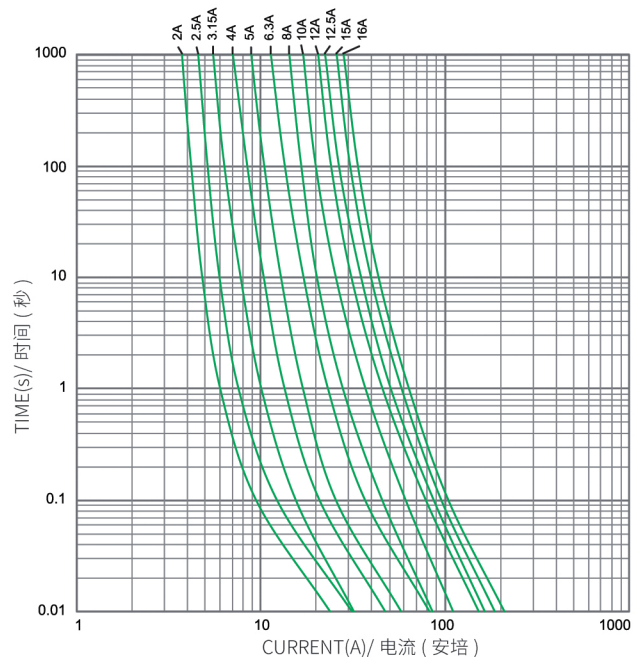

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	MAX. VOLTAGE DROP 最大电压降 (mv)	SAFETY APPROVALS 安全认证		REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
			cUR _{IS}	TÜV	
5HT-020H	2A	190	●	●	7.952
5HT-025H	2.5A	180	●	●	9.746
5HT-032H	3.15A	140	●	●	10.24
5HT-040H	4A	100	●	●	22.48
5HT-050H	5A	100	●	●	33.52
5HT-063H	6.3A	100	●	●	68.18
5HT-080H	8A	100	●	●	73.46
5HT-100H	10A	100	●	●	123.2
5HT-120H	12A	80	●	●	234.1
5HT-125H	12.5A	80	●	●	272.2
5HT-150H	15A	80	●	●	349.1
5HT-160H	16A	80	●	●	445.2

H DENOTES FOR 500V

H 表示 500V

● DENOTES FOR APPROVED

● 表示已取得安全认证

ELECTRICAL CHARACTERISTICS/ 电气特性:

RATING 额定		BLOWING TIME 熔断时间		
		2A-3.15A	4A-10A	>10A
2.1In	Max. 最慢	30 minutes	30 minutes	30 minutes
	Min. 最快	750 ms	750 ms	1 second
2.75In	Max. 最慢	80 seconds	80 seconds	80 seconds
	Min. 最快	95 ms	150 ms	150 ms
4In	Max. 最慢	5 seconds	5 seconds	8 seconds
	Min. 最快	10 ms	10 ms	20 ms
10In	Max. 最慢	150 ms	150 ms	150 ms

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cartridge Fuses](#) category:

Click to view products by [HOLLY](#) manufacturer:

Other Similar products are found below :

[5ST250MA-R](#) [5TT3A-R](#) [5TT8A-R](#) [MBO-20](#) [MDM-4/10](#) [MDQ-V-15/100](#) [MDX-1-6/10](#) [MDX-2](#) [MDX-3-2/10](#) [MDX-6-1/4](#) [FLSR-15](#)
[FLSR-30](#) [FRS-1-1/4](#) [FRS-1-6/10](#) [FRS-4/10](#) [H362003](#) [ABC-2](#) [1/2A](#) [12C10X38GI](#) [AGC-15EX](#) [AGC-V-3-12-R](#) [AGY-50](#) [15019-G](#) [MSL-1-](#)
[1/2](#) [MSL-1-1/4](#) [MSL-1/2](#) [MSL-1/4](#) [MSL-3](#) [MSL-3/4](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#) [BK1-S505-1-R](#) [BK1-S506-3-15-R](#)
[BK/C515S-250-R](#) [S501-V-10A](#) [301030](#) [303030](#) [FLA10](#) [FLA-4/10](#) [FLNR-5](#) [20.0M6.3X32F](#) [GBB-17-1/2](#) [301001](#) [301020](#) [311008](#)
[31301.5H-XP](#) [313.25](#) [313.75](#)