

HF115F-T/TH

MINIATURE HIGH POWER RELAY



File No.: E134517



File No.: 116934



File No.: CQC02001001951



Features

- High Temperature: 105°C
- Low height 15.7 mm
- 5kV dielectric strength (between coil and contacts)
- Creepage distance: 10mm
- Meeting VDE 0700, 0631 reinforce insulation
- Product in accordance to IEC 60335-1 available
- Sockets available
- Wash tight and flux proofed types available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (29.0 x 12.7 x 15.7) mm

CONTACT DATA

Contact arrangement	1A, 1C
Contact resistance	100mΩ (at 1A 6VDC)
Contact material	See ordering info.
Contact rating (Res. load)	HF115F-TH: 10A 250VAC HF115F-T: 16A 250VAC
Max. switching voltage	440VAC / 125VDC
Max. switching current	16A
Max. switching power	HF115F-TH: 2500VA HF115F-T: 4000VA
Mechanical endurance	1 x 10 ⁷ OPS
Electrical endurance	1 x 10 ⁵ OPS (See approval reports for more details)

CHARACTERISTICS

Insulation resistance	1000MΩ (at 500VDC)	
Dielectric strength	Between coil & contacts	5000VAC 1min
	Between open contacts	1000VAC 1min
Surge voltage (between coil & contacts)	10kV (1.2X50μs)	
Operate time (at nomi. volt.)	15ms max.	
Release time (at nomi. volt.)	8ms max.	
Temperature rise (at nomi. volt.)	55K max.	
Shock resistance *	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance *	10Hz to 150Hz 10g/5g	
Humidity	35% to 85% RH	
Ambient temperature	-40°C to 105°C	
Termination	PCB	
Unit weight	Approx. 13.5g	
Construction	Wash tight, Flux proofed	

Notes: 1) The data shown above are initial values.
2) * Index is not that of relay length direction.

COIL

Coil power	HF115F-TH: 250mW; HF115F-T: 400mW
------------	-----------------------------------

COIL DATA

at 23°C

Standard type (HF115F-T)

Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. Allowable Voltage VDC	Coil Resistance Ω
5	3.50	0.5	6.5	62 x (1±10%)
6	4.20	0.6	7.8	90 x (1±10%)
9	6.30	0.9	11.7	202 x (1±10%)
12	8.40	1.2	15.6	360 x (1±10%)
18	12.6	1.8	23.4	810 x (1±10%)
24	16.8	2.4	31.2	1440 x (1±10%)
48	33.6	4.8	62.4	5760 x (1±10%)
60	42.0	6.0	78	7500 x (1±15%)

Sensitive type (HF115F-TH)

Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. Allowable Voltage VDC	Coil Resistance Ω
5	3.75	0.5	6.5	100 x (1±10%)
6	4.50	0.6	7.8	144 x (1±10%)
9	6.75	0.9	11.7	324 x (1±10%)
12	9.00	1.2	15.6	576 x (1±10%)
18	13.50	1.8	23.4	1296 x (1±10%)
24	18.00	2.4	31.2	2304 x (1±10%)
48	36.00	4.8	62.4	9216 x (1±15%)
60	45.00	6.0	78	12857 x (1±15%)

Notes: The max. allowable voltage in the COIL DATA is coil overdrive voltage, it is the instantaneous max. voltage which the relay coil could endure in a very short time.



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2009 Rev. 1.01

SAFETY APPROVAL RATINGS

VDE	HF115F-TH-1H(S)3	10A 250VAC at 105°C 6A 400VAC at 105°C
	HF115F-T-1H(S)3B	16A 250VAC at 105°C
	HF115F-TH-1Z(S)3B	10A 250VAC at 105°C
	HF115F-T-1Z(S)3B	NO: 16A 250VAC at 105°C NC: 5A 250VAC at 105°C
UL&CUL	HF115F-TH-1H(S)3B	10A 277VAC
	HF115F-T-1H(S)3B	16A 277VAC

Notes: Only some typical ratings are listed above. If more details are required, please contact us..

ORDERING INFORMATION


HF115F-T/TH 012 -1H S 3 A (XXX)	
Type	HF115F-T: Standard HF115F-TH: High Sensitive
Coil voltage	5, 6, 9, 12, 18, 24, 48, 60VDC
Contact arrangement	1H: 1 Form A 1Z: 1 Form C
Construction ¹⁾	S: Wash tight Nil: Flux proofed
Version	3: 5.0mm
Contact material	A: AgSnO ₂ B: AgNi Nil: AgCdO
Customer special code	e.g. (335) stands for product in accordance to IEC 60335-1 (GWT)

Notes: 1) We recommend flux proofed types for a clean environment (free from contaminations like H₂S, SO₂, NO₂, dust, etc.). We suggest to choose wash tight types and validate it in real application for an unclean environment (with contaminations like H₂S, SO₂, NO₂, dust, etc).
If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm


Outline Dimensions

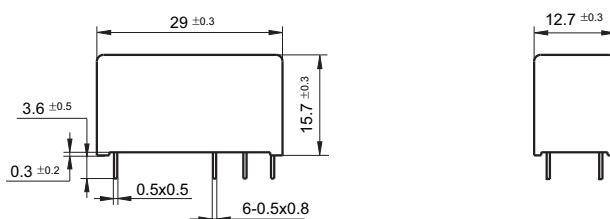


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

PCB Layout
(Bottom view)




Wiring Diagram
(Bottom view)

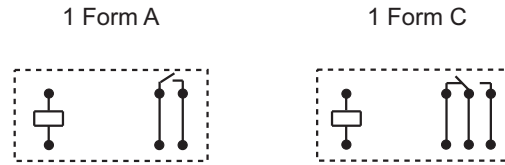


- Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤ 1 mm, tolerance should be ± 0.2 mm; outline dimension > 1 mm and ≤ 5 mm, tolerance should be ± 0.3 mm; outline dimension > 5 mm, tolerance should be ± 0.4 mm.
 2) The tolerance without indicating for PCB layout is always ± 0.1 mm.
 3) The width of the gridding is 2.52mm.

CHARACTERISTIC CURVES

ENDURANCE CURVE

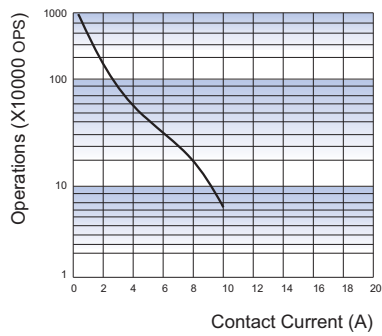

COIL OPERATING RANGE (DC)

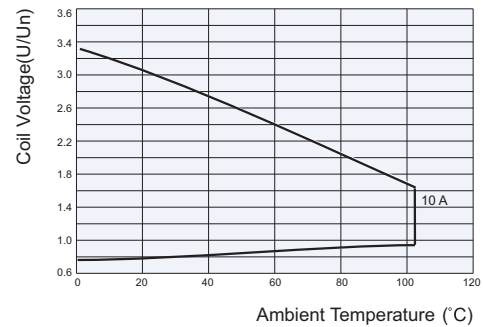

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Hongfa](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)