

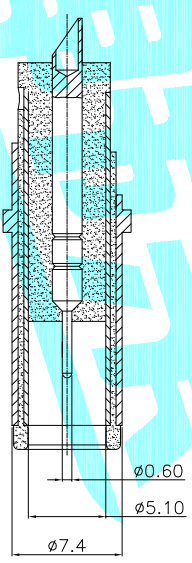


RECOMMENDED P.C.B LAYOUT



MATING PLUG: OD Ø7.4 ; ID Ø0.6

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 42V 10A
 - CONTACT RESISTANCE: 30m MAX (INITIAL)
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100M MIN. MEASURED BY 250 VDC
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 3.0 KGf Max.
 - WITHDRAWAL FORCE : 0.35 KGf Min.
 - LIFE TEST: 5,000 CYCLES MIN.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.

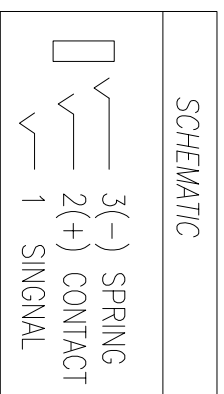

ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
③	HOUSING		1	LCP	Black	
②	SHELL		5	C5191	Au 0.5u"Max	
①	TERMINAL		1	C2680	Ni 50u"Min	

APPROVALS	DATE	TITLE
DRAWN JKUN.LLU	2013/11/11	ELECTRONICS CO.,LTD
CHECKED		DC POWER JACK
APPROVALS		DC-071

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	ANGLE	UNIT:	SCALE:	PROJ:	SHEET
	A		NEW				30~Ø±.1	±0.30	mm	1:1	PROJ: DC-071	1 OF 1
							10~Ø±.30	±0.20				
							5~Ø±.10	±0.15				
							~ 5	±0.10				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [hro parts manufacturer](#):

Other Similar products are found below :

[K5-1652UA-01](#) [U-B-M4DD-W-2](#) [K2-1848FP-A4DW-01](#) [3D162](#) [ES-12KP](#) [SD-01A](#) [DC-044S-20A](#) [K3-1336S-F1](#) [K2-1112SQ-A4SW-01](#)
[K2-6645SP-S4SC-04](#) [K2-6639DP-I3SW-04](#) [ES-08KP](#) [ES-10KP](#) [DS-07RP](#) [K6-6610D01](#) [ES-09KP](#) [U-B-M4SS-W-1](#) [U-A-24DD-W-11](#) [K2-](#)
[1832UR-A3SW-06](#) [K3-1391C-51](#) [K2-1821SH-A4SW-06](#) [DA-12RP](#) [U-A-25DD-W-1](#) [EM-12KP](#) [DS-12BP](#) [DP-12BP](#) [TYPE-C-31-G-02](#) [ES-](#)
[05KP](#) [K3-2235S-L1](#) [DS-12RP](#) [ES-04KP](#) [ES-06KP](#) [PJ-601-5A](#) [K2-1830UQ-A4DW-06](#) [K9-1804A-1](#) [U-A-24DD-Y-7](#) [K9-1801A-7](#) [DA-12BP](#)
[K2-1821DQ-A4SW-06](#) [K6-6272S04](#) [K3-1336S-K1](#) [K9-1803N](#) [K2-1109DP-B4SW-01](#) [K2-1102AQ-A3SW-01](#) [DP-12RP](#) [K6-6147D01](#) [DC-](#)
[033-13A](#) [K2-1806SG-A4DW-04](#) [K2-1156UP-F4SW-05](#) [K9-1801A](#)