
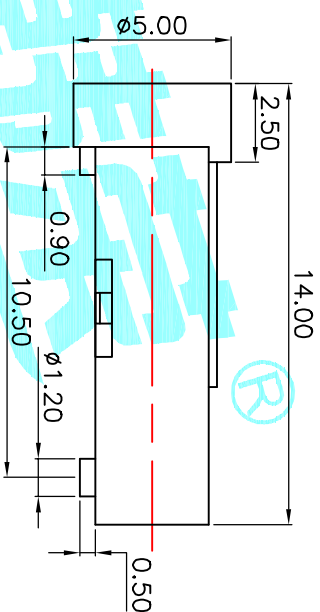


P.C.B Layout (copper-sided view)

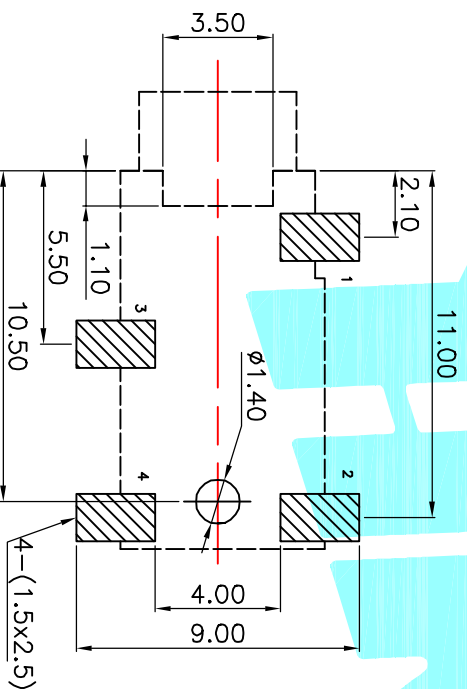

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

Model NO	PJ-380B-A	PJ-380B-B
	PJ-380B-C	PJ-380B-D
Schematic		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHECK.	APPRO.																																																																
	A		NEW																																																																		
<table border="1"> <tr> <td>② Terminal</td> <td>4</td> <td>Phosphor bronze</td> <td>Au Plating</td> </tr> <tr> <td>① Housing</td> <td>1</td> <td>Nylon</td> <td>Black</td> </tr> <tr> <td>ITEM</td> <td>PART NAME</td> <td>TER'NO.</td> <td>QTY.</td> <td>MATERIAL</td> <td>FINISHING</td> <td>REMARK</td> </tr> <tr> <td colspan="2">APPROVALS</td> <td>DATE</td> <td colspan="4"></td> </tr> <tr> <td colspan="2">DRAWN</td> <td>J.X.Zhang</td> <td>2013/11/11</td> <td colspan="3">ELECTRONICS CO.,LTD</td> </tr> <tr> <td colspan="2">CHECKED</td> <td></td> <td colspan="2">TITLE:</td> <td colspan="2">PHONE JACKES</td> </tr> <tr> <td colspan="2">APPROVALS</td> <td></td> <td colspan="2">PART NO.</td> <td colspan="2">PJ-380B</td> </tr> <tr> <td colspan="2">TOLERANCES ARE</td> <td>30^{+0.15} 10^{-0.30} 5^{-0.10}</td> <td>±0.30 ±0.20 ±0.15</td> <td>ANGLE</td> <td>±2°</td> <td>SCALE: 1:1</td> </tr> <tr> <td colspan="2"></td> <td>~5</td> <td>±0.10</td> <td></td> <td></td> <td>PROJ-</td> </tr> <tr> <td colspan="2"></td> <td></td> <td></td> <td>DRAWING NO.</td> <td></td> <td>SHEET 1 OF 1</td> </tr> </table>						② Terminal	4	Phosphor bronze	Au Plating	① Housing	1	Nylon	Black	ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK	APPROVALS		DATE					DRAWN		J.X.Zhang	2013/11/11	ELECTRONICS CO.,LTD			CHECKED			TITLE:		PHONE JACKES		APPROVALS			PART NO.		PJ-380B		TOLERANCES ARE		30 ^{+0.15} 10 ^{-0.30} 5 ^{-0.10}	±0.30 ±0.20 ±0.15	ANGLE	±2°	SCALE: 1:1			~5	±0.10			PROJ-					DRAWING NO.		SHEET 1 OF 1
② Terminal	4	Phosphor bronze	Au Plating																																																																		
① Housing	1	Nylon	Black																																																																		
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK																																																															
APPROVALS		DATE																																																																			
DRAWN		J.X.Zhang	2013/11/11	ELECTRONICS CO.,LTD																																																																	
CHECKED			TITLE:		PHONE JACKES																																																																
APPROVALS			PART NO.		PJ-380B																																																																
TOLERANCES ARE		30 ^{+0.15} 10 ^{-0.30} 5 ^{-0.10}	±0.30 ±0.20 ±0.15	ANGLE	±2°	SCALE: 1:1																																																															
		~5	±0.10			PROJ-																																																															
				DRAWING NO.		SHEET 1 OF 1																																																															

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:

Click to view products by [HRO parts](#) manufacturer:

Other Similar products are found below :

[1775247-3](#) [2-1932649-5](#) [30-1231](#) [30-528](#) [2069485-1](#) [30-504](#) [30-519](#) [30-542](#) [47648-2000](#) [2002-400](#) [TC142X](#) [1453G1](#) [769-103/021-000](#)
[1932649-1](#) [233-368NFG6-17NH](#) [G45A19071083HR](#) [233-360NF00-17NH](#) [CP30200GM3B](#) [HYC02-DVI29-371](#) [P136-06NHDV4KBP](#)
[CP30116](#) [LTWDID-29PFFS-SL8001](#) [46765-1301](#) [1211-0010-201-001](#) [47271-1004](#) [32-1121-BU](#) [DS1117-BN0-TME-002](#) [MHDR2A11004BP](#)
[EHHDMI2PKG](#) [1903015-3](#) [DS1114-BN0](#) [WPUSBAF](#) [500254-1931](#) [HDMR-19-01-F-SM](#) [47151-1071](#) [1747981-1](#) [0480372000](#) [0482580001](#)
[D121073-19](#) [472710111](#) [HDMI-S-RA6-SMT-MF-15](#) [P142-000-UP](#) [P134-003](#) [P120-08N](#) [KDMIX-FS1V-WS-B](#) [P142-000-UD](#) [10029449-](#)
[101RLF](#) [P132-000](#) [P130-000](#) [P142-06N-MICRO](#)