


Flexible microwave cable EACON_4C Item: 84048293

Description

Eacon: Field mountable flexible microwave cables
50 Ohm, 18 GHz, 200°C, ø5.4 mm, FEP jacket

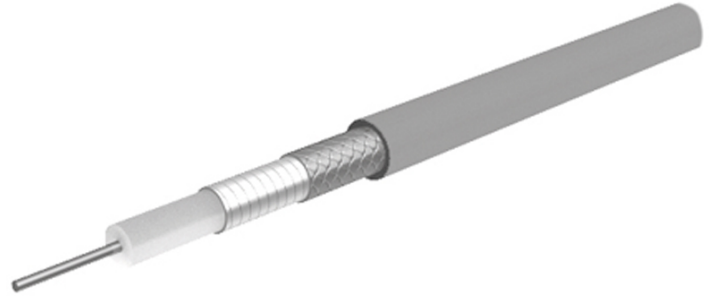

Technical Data

Construction

	Material	Detail	Diameter
Centre conductor	Copper, Silver plated	Wire	1.4 mm
Dielectric	PTFE-LD		4.15 mm
Outer conductor	Copper, Silver plated	wrapped Foil, 100%	4.28 mm
Outer conductor	Copper, Silver plated	Braid	4.9 mm
Jacket	FEP (Fluorinated ethylene propylene)		5.7 mm

Print: HUBER+SUHNER EACON 4C 50 OHM Lot-No..

Electrical Data

Impedance	50 Ω
Operating Frequency	18 GHz
Capacitance	87 pF/m
Velocity of signal propagation	77 %
Signal delay	4.3 ns/m
Screening effectiveness	≥ 90 dB (up to 18 GHz)
Operating voltage	≤ 2.6 kV _{rms} (at sea level)

Mechanical Data

Weight		7.3 kg/100 m
Min. bending radius	static	15 mm
	dynamic	25 mm

Environmental Data

Temperature range	-55 °C ... + °C
Flame propagation test	FAR 25.869,
Halogen free	No
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant
1907/2006/EC (REACH)	compliant
2000/53/EC (ELV)	compliant
2012/19/EU (WEEE)	no special marking needed

Additional Information

Remarks

(For details refer to the HUBER+SUHNER RF CABLES GENERAL CATALOGUE or contact your nearest HUBER+SUHNER partner)

Suitable Connectors

Cable group	U94 EACON_4C
-------------	--------------

Flexible microwave cable EACON_4C Item: 84048293

Matrix typical Attenuation [formula: $(a \cdot f^{0.5} + b \cdot f)$] and maximum Power CW [formula: $(p/f^{0.5})$]

Coefficients:

a = 0.2291

b = 0.0071

f_{max} = 18

P at 1GHz = 907

Frequency (GHz)	Nom. attenuation (dB / m) sea level 25° C ambient temperature	Nom. attenuation (dB / ft) sea level 25° C ambient temperature	Max. CW power (W) sea level 40° C ambient temperature
0,9	0,22	0,068	956
1,8	0,32	0,098	676
2,7	0,4	0,121	552
3,6	0,46	0,140	478
4,5	0,52	0,158	428
5,4	0,57	0,174	390
6,3	0,62	0,189	361
7,2	0,67	0,203	338
8,1	0,71	0,216	319
9,0	0,75	0,229	302
9,9	0,79	0,241	288
10,8	0,83	0,253	276
11,7	0,87	0,264	265
12,6	0,9	0,275	256
13,5	0,94	0,286	247
14,4	0,97	0,296	239
15,3	1,0	0,306	232
16,2	1,04	0,316	225
17,1	1,07	0,326	219
18,0	1,1	0,335	214

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Coaxial Cables](#) category:

Click to view products by [Huber & Suhner](#) manufacturer:

Other Similar products are found below :

[89880-003-1000](#) [CY2389-000](#) [8221-010-U1000](#) [9116-010-U500](#) [1322R-010-1000](#) [1807A-B59-U1000](#) [2020K8421-9X-CS3417](#) [9251-010-1000](#) [9275-010-U1000](#) [935240-000](#) [980704-001](#) [CF2823-000](#) [33312-010-500](#) [CZ1589-000](#) [5022W0809-0CS3263](#) [10610-4-4](#) [EF8108-000](#) [1673B TIN100](#) [672525-001](#) [144517-000](#) [735A1-008-1000](#) [8212-010-U500](#) [480414-000](#) [7915A 009U1000](#) [5024A1311-0](#) [1281S5 010250](#) [1530A 010U1000](#) [9248 010U1000](#) [9244 0101000](#) [1694A 0081000](#) [1190A 0101000](#) [8241F J5C1000](#) [1674A TIN50](#) [7915A 0091000](#) [TRCH-50-2](#) [9066 0031000](#) [7805R 008100](#) [1674A TIN100](#) [9116SB 0101000](#) [9271 0061000](#) [1613A 0101000](#) [1807A B591000](#) [5339Q5 009U500](#) [539945 0091000](#) [9116R 0101000](#) [89207 010100](#) [9058 0101000](#) [8241A 0101000](#) [DA7805R 0101000](#) [C6424](#)