


CONTROL DRAWING

minibend-XX

AQ

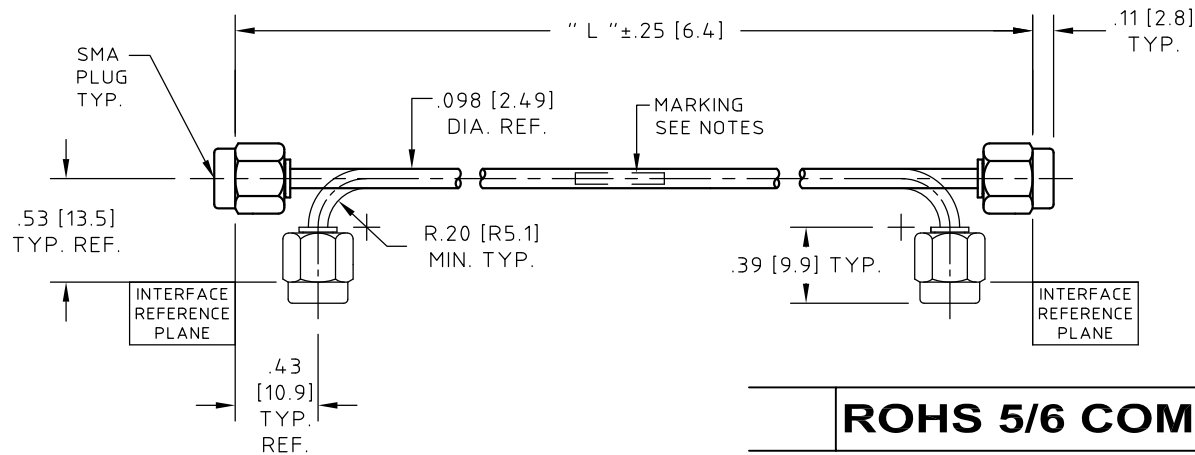

ROHS 5/6 COMPLIANT

NOTES:

- DESCRIPTION,
CABLE ASSEMBLY, SMA PLUG TO SMA PLUG.
- CABLE,
COAXIAL CABLE HUBER+SUHNER Astrolab P/N 32081 MEETS OR EXCEEDS MIL-DTL-17. SEE HUBER+SUHNER Astrolab CONTROL DRAWING FOR MATERIALS AND FINISHES.
- CONNECTOR -A-, SMA PLUG:
HUBER+SUHNER Astrolab P/N 29094C-32-81 INTERFACE DIMENSIONS IAW MIL-STD-348. SEE HUBER+SUHNER Astrolab CONTROL DRAWING FOR MATERIALS AND FINISHES.
- CONNECTOR -B-, SMA PLUG:
SAME AS CONNECTOR -A-.

NOTES CONTINUED:

- MARKING:
MARKING APPROXIMATELY CENTERED DIRECTLY ON CABLE AS FOLLOWS:
MINIBEND-xx YYWW
WHERE xx DENOTES THE LENGTH OF THE CABLE ASSEMBLY AND YYWW THE DATE CODE FOR DATE OF MANUFACTURE.
NO MARKING ON CABLE ASSEMBLIES SHORTER THAN 2.50 [63.5].
MARKING ON PACKAGING ONLY.
- ELECTRICAL CHARACTERISTICS:
IMPEDANCE,
50.0 Ohms NOMINAL.
FREQUENCY, INSERTION LOSS AND VSWR SEE CHART.
- MECHANICAL:
OPERATING TEMPERATURE RANGE,
-45° C TO +85° C.
PULL STRENGTH TO 15.0 LBs [66.7 N].
- ATTENUATION FORMULAS:
8A. CALCULATE AT 18.0 GHz
(dB) = 1.20 dB/FT. X L(ft.).+25 dB
8B. CALCULATE AT 24.0 GHz
(dB) = 1.39 dB/FT. X L(ft.).+29 dB

HUBER+SUHNER Astrolab PART NUMBER	DIMENSION "L"	2.0 GHz		12.4 GHz		18.0 GHz		24.0 GHz	
		VSWR	I.L. dB	VSWR	I.L. dB	VSWR	I.L. dB	VSWR	I.L. dB
minibend-2.5	2.50 [63.5]	1.20:1	0.18	1.25:1	0.36	1.35:1	0.50	1.40:1	0.57
minibend-3	3.00 [76.2]	1.20:1	0.19	1.25:1	0.40	1.35:1	0.55	1.40:1	0.64
minibend-3.5	3.50 [88.9]	1.20:1	0.21	1.25:1	0.44	1.35:1	0.60	1.40:1	0.70
minibend-4	4.00 [101.6]	1.20:1	0.23	1.25:1	0.48	1.35:1	0.65	1.40:1	0.75
minibend-4.5	4.50 [114.3]	1.20:1	0.24	1.25:1	0.54	1.35:1	0.70	1.40:1	0.82
minibend-5	5.00 [127.0]	1.20:1	0.26	1.25:1	0.57	1.35:1	0.75	1.40:1	0.87
minibend-5.5	5.50 [139.7]	1.20:1	0.27	1.25:1	0.62	1.35:1	0.80	1.40:1	0.93
minibend-6	6.00 [152.4]	1.20:1	0.29	1.25:1	0.65	1.35:1	0.85	1.40:1	0.99
minibend-6.5	6.50 [165.1]	1.20:1	0.30	1.25:1	0.70	1.35:1	0.90	1.40:1	1.04
minibend-7	7.00 [177.8]	1.20:1	0.32	1.25:1	0.74	1.35:1	0.95	1.40:1	1.10
minibend-8	8.00 [203.2]	1.20:1	0.35	1.25:1	0.82	1.35:1	1.05	1.40:1	1.22
minibend-9	9.00 [228.6]	1.20:1	0.38	1.25:1	0.91	1.35:1	1.15	1.40:1	1.35
minibend-10	10.00 [254.0]	1.20:1	0.41	1.25:1	0.98	1.35:1	1.24	1.40:1	1.46
minibend-11	11.00 [279.4]	1.20:1	0.44	1.25:1	1.07	1.35:1	1.34	1.40:1	1.58
minibend-12	12.00 [304.8]	1.20:1	0.47	1.25:1	1.15	1.35:1	1.42	1.40:1	1.68
minibend-13	13.00 [330.2]	1.20:1	0.50	1.25:1	1.23	1.35:1	1.53	1.40:1	1.81
minibend-14	14.00 [355.6]	1.20:1	0.53	1.25:1	1.30	1.35:1	1.62	1.40:1	1.92
minibend-15	15.00 [381.0]	1.20:1	0.57	1.25:1	1.40	1.35:1	1.73	1.40:1	2.04
minibend-16	16.00 [406.4]	1.20:1	0.60	1.25:1	1.47	1.35:1	1.82	1.40:1	2.15
minibend-17	17.00 [431.8]	1.20:1	0.63	1.25:1	1.56	1.35:1	1.95	1.40:1	2.26
minibend-18	18.00 [457.2]	1.20:1	0.66	1.25:1	1.64	1.35:1	2.05	1.40:1	2.38
minibend-19	19.00 [482.6]	1.20:1	0.69	1.25:1	1.72	1.35:1	2.15	1.40:1	2.49
minibend-20	20.00 [508.0]	1.20:1	0.72	1.25:1	1.80	1.35:1	2.25	1.40:1	2.61
minibend-		1.20:1		1.25:1		1.35:1		1.40:1	

SEE NOTE 8

UNLESS OTHERWISE SPECIFIED
CONCENTRICITY .004 T.I.R.
CORNERS AND FILLETS .005
MAX. RADIUS OR CHAMFER.
SURFACE FINISH 63 RMS
MICROINCHES OR BETTER.

FRACTIONS	± 1/16
X	± .030
XX	± .015
XXX	± .005
ANGLES	± 1°
DO NOT SCALE DRAWING	

NAME	DATE	
PREP. M. KEATING	11/07/95	
ELEC.		
MECH.		
Q.C.		

THIS DRAWING CONTAINS PATENTABLE AND PROPRIETARY INFORMATION. THE DESIGN CANNOT BE USED WITHOUT WRITTEN PERMISSION OF HUBER + SUHNER ASTROLAB.

CABLE ASSEMBLY, SMA PLUG TO SMA PLUG.

AQ	ECN No. 15734	08/09/13	EB		THDS. TO BE IN ACCORD WITH U.S. DEPT. OF COMM. SCREW THD. STDS. FOR FEDERAL SERVICES 1950 SUPL. TO HANDBOOK H 28.	SCALE 1:1	CODE IDENT. 16301	DWG NO. minibend-XX	REV AQ
REV.	DESCRIPTION	DATE	BY	APPROVED					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Huber & Suhner](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#)
[24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-](#)
[003](#) [25P203C25P2-003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-](#)
[48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#)
[TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#)
[R285020301W](#) [PCX-18-50](#) [Minibend-9](#) [Minibend-4](#) [BNC TO SMA Cable](#) [MIKROE-274](#)