


PS/2 AC Input ATX Type

ACE-A160A

600W PS/2 ATX Power Supply with ErP



Specifications

Input	Voltage	90-265 VAC Full Range		
	Frequency	47-63Hz		
	Input Current	10A(RMS)@115VAC, 5A(RMS)@230VAC		
	Inrush Current	40A max for 115VAC 80A max for 230VAC		
Output	Voltage	Min. load	Max. load	Ripple & Noise
	+3.3V	1.5A	25.0A	50mV
	+5V	1A	25.0A	50mV
	+12V1	1A	16.0A	120mV
	+12V2	1A	16.0A	120mV
	+12V3	1A	16.0A	120mV
	+12V4	0.5A	16.0A	120mV
	-12V	0A	0.5A	120mV
	+5VSB	0A	4.0A	50mV
	Maximum continuous combined load on +3.3VDC and +5VDC outputs shall not exceed 150watts.			
Maximum continuous total DC output power should not exceed 600W				
Over Voltage Protection	5V: 5.7V-6.5V			
	12V1 ~ 12V4: 13.3V-16.7V			
3.3V: 3.9V-4.5V				
Short Circuit Protection	+3.3V, +5V, +12V1, +12V2, +12V3, +12V4, 24V or -12V shutdown and latch off			
General Specifications	Watt	600W		
	PFC	Active		
	Hold-up time	16 ms Min.		
	Efficiency	85%		
	MTBF	100000 hours		
	Temperature	Operating: -5°C ~ 50°C Storage: -40°C ~ 80°C		
	Dimensions	140 x 150 x 86 (mm)		
	Output Connector	1 x 20+4-pin ATX, 1 x 4-pin 12V CPU, 9 x HDD/CDROM, 2 x FDD, 2 x SATA, 1 x Extra +5V (P10)		

1 Industrial Computing Solutions

2 Video Capture Solutions

3 Embedded Computing Solutions

4 Automation Control

5 ORing Network Communication

6 Power Supply/ Peripherals


7 Panel Solutions Introduction

Ordering Information

Part No.	Description
ACE-A160A-R11	600W AC-DC PS/2 ATX Power Supply with ErP, Meet 80 PLUS (Bronze)

Dimensions (Unit: mm)

REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	CABLE LENGTH
P1 24	1	+3.3VDC	ORANGE	400±15mm
	2	+3.3VDC	ORANGE	
	3	COM	BLACK	
	4	+5VDC	RED	
	5	COM	BLACK	
	6	+5VDC	RED	
	7	COM	BLACK	
	8	PW-OK	GRAY	
	9	+5Vsb	PURPLE	
	10	+12V3	Yel/Blue	
	11	+12V3	Yel/Blue	
	12	+3.3VDC	ORANGE	
	13	+3.3VDC	ORANGE	
	13	+3.3VDC	ORANGE	
	13	+3.3V _{sense}	BROWN	
	14	-12VDC	BLUE	
	15	COM	BLACK	
	16	PS-ON	GREEN	
	17	COM	BLACK	
	18	COM	BLACK	
	19	COM	BLACK	
	20	-5V	WHITE	
	21	+5VDC	RED	
	22	+5VDC	RED	
23	+5VDC	RED		
24	COM	BLACK		
P2	1	COM	BLACK	400±15mm
	2	COM	BLACK	
	3	COM	BLACK	
	4	+5VDC	RED	
P3	1	COM	BLACK	500±15mm
	2	COM	BLACK	
	3	+12V1	YELLOW	
	4	+12V1	YELLOW	
PA	1	+3.3VDC	ORANGE	400±15mm
	2	COM	BLACK	
	3	+5V	RED	
	4	COM	BLACK	
	5	+12V3	Yel/Blue	
PB	1	+3.3VDC	ORANGE	155±10mm
	2	COM	BLACK	
	3	+5V	RED	
PI	1	+12V4	Yel/White	400±15mm
	2	COM	BLACK	
	3	COM	BLACK	
PL	1	+5V	RED	155±10mm
	4	+5V	RED	
PJ	1	+12V4	Yel/White	155±10mm
	2	COM	BLACK	
PM	3	COM	BLACK	155±10mm
	4	+5V	RED	
PK	1	+5V	RED	150±10mm
	2	COM	BLACK	
	3	COM	BLACK	
	4	+12V4	Yel/White	
PC	1	+12V2	Yel/Black	400±15mm
	2	COM	BLACK	
	3	COM	BLACK	
	4	+5V	RED	
PD	1	+12V2	Yel/Black	155±10mm
	2	COM	BLACK	
PE	3	COM	BLACK	155±10mm
	4	+5V	RED	
PG	1	+5V	RED	150±10mm
	2	COM	BLACK	
PH	3	COM	BLACK	150±10mm
	4	+12V2	Yel/Black	

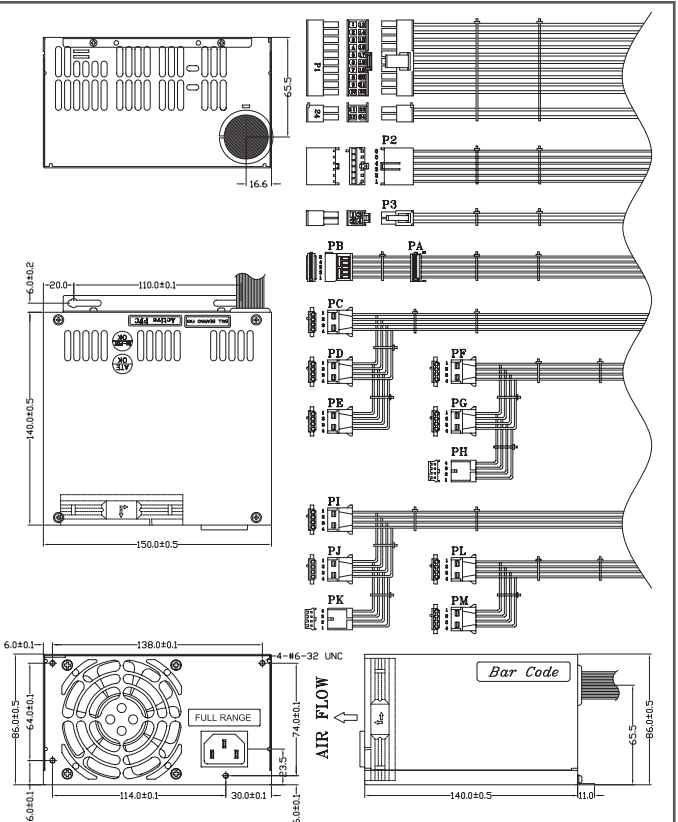

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [IEI](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [VI-LUL-IU](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-](#)
[OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#)
[TVQF-1219-18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-](#)
[0028G](#) [EP3000AC48INZ](#) [VP-C2104853](#)