


HYPER-KBN



Pico-ITX SBC Supports AMD® Embedded G-Series SoC with DDR3, DVI-I/LVDS, GbE, USB 3.0, SATA 6Gb/s, Audio and RoHS

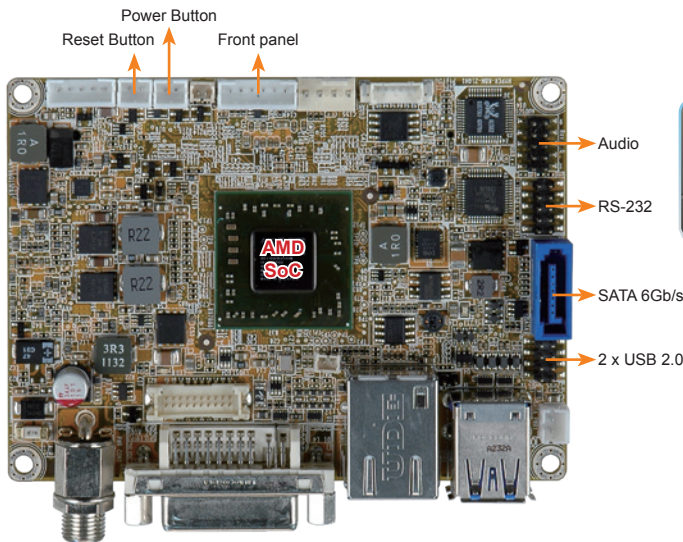

Specifications

- ◆ SoC
 - GX-415GA on-board SoC (1.5GHz, quad-core, 2MB cache, TDP=15W)
 - GX-210HA on-board SoC (1.0GHz, dual-core, 1MB cache, TDP=9W) (support fanless solution)
 - GX-420CA on-board SoC (2.0GHz, quad-core, 2MB cache, TDP=25W)
 - GX-217GA on-board SoC (1.65GHz, dual-core, 1MB cache, TDP=15W)
- ◆ BIOS
 - AMI UEFI BIOS
- ◆ Memory
 - One 204-pin 1600/1333 MHz dual-channel DDR3 & DDR3L SDRAM unbuffered DIMM supports up to 8 GB
- ◆ Graphics Engine
 - Support DX11.1, OpenGL 4.1 and OpenCL1.2
 - UVD4.2 decode for H.264, MPEG2/4, VC1, MVC
 - VCE 2.0 encode for H.264, VCE
- ◆ Display Output
 - 1 x DVI-I (DVI-D up to 1920x1200@60Hz, VGA up to 2048x1536@60Hz)
 - 1 x 18-bit single-channel LVDS (up to 1600x900@60Hz)
- ◆ Ethernet
 - LAN: Realtek RTL8111E controllers with ASF2.0 supported
- ◆ External I/O Interface
 - 2 x USB 3.0
- ◆ Internal I/O Interface
 - 1 x RS-232 (2x5 pin, P=2.0)
 - 1 x SATA 6Gb/s with 5V SATA power connector
 - 2 x USB 2.0 (2x4 pin, P=2.0)
- ◆ Audio
 - Realtek AL662 HD Audio codec
 - 1 x Front audio (2x5 pin)
- ◆ Front Panel
 - 1 x Power LED & HDD LED (1x6 pin)
 - 1 x Power button (1x2 pin)
 - 1 x Reset button (1x2 pin)
- ◆ LAN LED
 - 1 x LAN LED (1x2 pin)
- ◆ Fan Connector
 - 1 x Smart fan connector (1x4 pin)
- ◆ Watchdog Timer
 - Software programmable, support 1~255 sec. system reset
- ◆ Power Supply
 - 12V only DC input
 - 1 x External DC power jack (ø5.5 mm)
 - Support AT/ATX mode
- ◆ Power Consumption
 - 12V@1.45A (AMD GX-415GA 1.5GHz CPU with one 2 GB 1333 MHz DDR3 memory)
- ◆ Operating Temperature
 - 0°C ~ 60°C
- ◆ Storage Temperature
 - 10°C ~ 70°C
- ◆ Operating Humidity
 - 5% ~ 95%, non-condensing
- ◆ Dimensions (LxW)
 - 100mm x 72mm
- ◆ Weight
 - GW: 600g/ NW: 250g
- ◆ CE/FCC compliant

Flexible Application Small size form factor: Pico-ITX

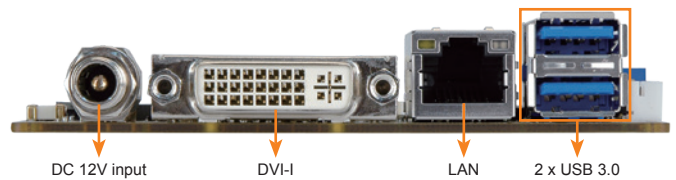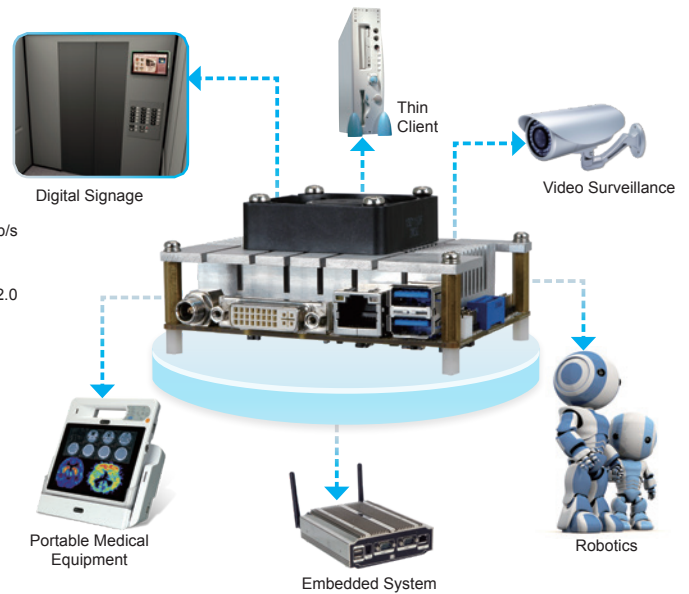

Features

- Pico-ITX form factor with AMD® Embedded G-Series SoC supports DDR3/DDR3L up to 1600 MHz memory
- 12V only single voltage design for AT/ATX power by DC power jack
- DVI-I and 18-bit single-channel LVDS support for dual display
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Packing List

1 x HYPER-KBN single board computer
1 x Audio cable
1 x RS-232 cable
1 x SATA with 5V output cable kit
1 x Special heatsink
1 x QIG

Ordering Information

Part No.	Description
HYPER-KBN-4151-R10	Pico-ITX SBC with AMD 28nm quad-core GX-415GA 1.5GHz (15W) SoC processor, DDR3 DVI-I/LVDS, GbE, SATA 6Gb/s, USB 3.0, HD Audio and RoHS
HYPER-KBN-2101-R10	Pico-ITX SBC with AMD 28nm dual-core GX-210HA 1.0GHz (9W) SoC processor, DDR3 DVI-I/LVDS, GbE, SATA 6Gb/s, USB 3.0, HD Audio and RoHS
32001-008600-200-RS	Dual-port USB cable, 210mm, P=2.0

Note: Models with other CPUs not listed in the table are requested by MOQ - 100 pcs/lot

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [IEI](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [BPI-M5](#)
[GENE-APL5-A12-F002](#) [MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#)
[VAB-600-B](#) [RT5350F-OLINUXINO-EVB](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#)
[BANANA PI BPI-M1+](#) [A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-](#)
[APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#)
[PROFESSIONAL](#) [GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-](#)
[LIME-S16M](#) [A20-OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#)