

ESD108-B1-CSP0201

Bi-directional ESD protection device, 5.5 V, 0.28 pF, 0201



Product description

This Infineon ESD (electrostatic discharge) protection device has a bi-directional and symmetric I/V characteristic and excellent clamping performance

Feature list

- ESD / transient protection according to:
 - IEC61000-4-2 (ESD): ± 25 kV (air) / ± 25 kV (contact)
 - IEC61000-4-4 (EFT): ± 2.5 kV / ± 50 A (5/50 ns)
 - IEC61000-4-5 (Surge): ± 2.5 A (8/20 μ s)
- Bi-directional maximum working voltage: $V_{WM} = \pm 5.5$ V
- Line capacitance: $C_L = 0.28$ pF at $f = 1$ MHz
- Clamping voltage: $V_{cl} = 20$ V at $I_{TLP} = 16$ A with $R_{dyn} = 0.78 \Omega$
- Very low leakage current: $I_L = 0.1$ nA
- Small form factor SMD size 0201, low profile (0.58 x 0.28 x 0.15 mm³)



Potential applications

- USB 3.x Gen. 1, USB 2.0
- HDMI, DisplayPort

Product validation

Qualified for industrial applications according to the relevant tests of JEDEC47/20/22.

Device information




Figure 1 Pin configuration with marking (bottom view)

Table 1 Part information

| Product name / Ordering code | Package | Pin configuration | Marking | Pieces / Reel |
|--|---------|------------------------|---------|---------------|
| ESD108-B1-CSP0201 / ESD108B1CSP0201XTSA1 | WLL-2-1 | 1 line, bi-directional | C | 15 k |

Table of contents

| | | |
|----------|--|----|
| | Product description | 1 |
| | Feature list | 1 |
| | Potential applications | 1 |
| | Product validation | 1 |
| | Device information | 1 |
| | Table of contents | 2 |
| 1 | Absolute maximum ratings | 3 |
| 2 | Electrical characteristics | 4 |
| 3 | Thermal characteristics | 6 |
| 4 | Typical characteristic diagrams | 7 |
| 5 | Package information WLL-2-1 | 13 |
| 6 | References | 14 |
| 7 | Revision history | 14 |
| | Disclaimer | 15 |

1 Absolute maximum ratings

1 Absolute maximum ratings

Table 2 Absolute maximum ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

| Parameter | Symbol | Values | | Unit | Note or test condition |
|-----------------------|---------------------------|--------|------|------|---|
| | | Min. | Max. | | |
| Working voltage | V_{WM} | -5.5 | +5.5 | V | |
| Working current | I_{WM} | -10 | +10 | mA | Device mounted on PCB with $R_{th} = 200 \text{ K/W}$ |
| ESD discharge voltage | $V_{ESD}(\text{contact})$ | -25 | +25 | kV | Discharge network: $R = 330 \Omega$, $C = 150 \text{ pF}$ ¹⁾ |
| | $V_{ESD}(\text{air})$ | -25 | +25 | | |
| Peak pulse power | P_{PK} | - | 1800 | W | $t_p = 100 \text{ ns}$ |
| | | - | 27.5 | | $t_p = 8/20 \mu\text{s}$ waveform ²⁾ |
| Peak pulse current | I_{PP} | -2.5 | +2.5 | A | $t_p = 8/20 \mu\text{s}$ waveform ²⁾ |
| Operating temperature | T_{op} | -55 | +125 | °C | |
| Storage temperature | T_{stg} | -65 | +150 | | |

Attention: Stresses above the maximum values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Maximum ratings are absolute ratings. Exceeding only one of these values may cause irreversible damage to the component.

¹ Based on IEC61000-4-2.

² Based on IEC61000-4-5.

2 Electrical characteristics

2 Electrical characteristics

Note: $T_A = 25^\circ\text{C}$, unless otherwise specified. Device is electrically symmetrical.

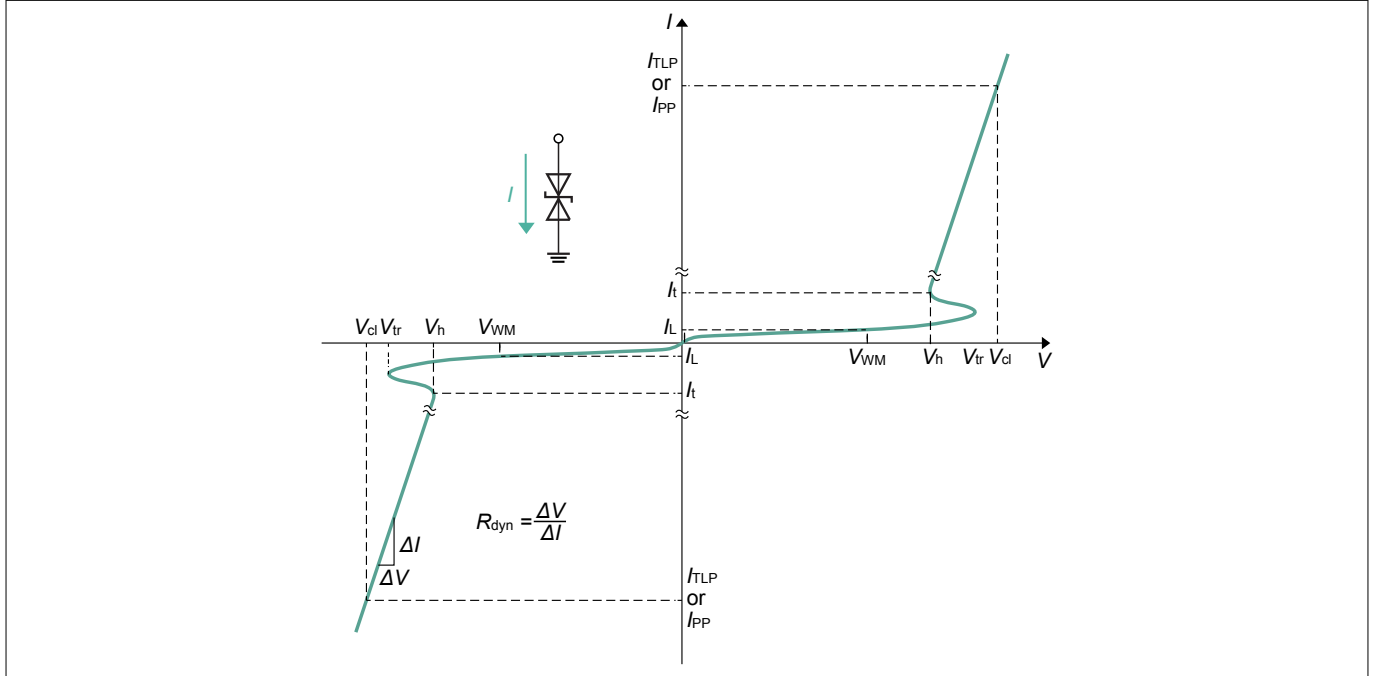


Figure 2 I/V characteristic curve

Table 3 I/V characteristic parameters

| Symbol | Parameter |
|-----------|---|
| I_h | Holding current |
| I_L | Leakage current |
| I_{PP} | Peak pulse current, based on IEC61000-4-5 |
| I_t | Test current |
| I_{TLP} | TLP current |
| R_{dyn} | Dynamic resistance |
| V_{cl} | Clamping voltage |
| V_h | Holding voltage |
| V_t | Test voltage |
| V_{tr} | Trigger voltage |
| V_{WM} | Maximum working voltage |

2 Electrical characteristics
Table 4 DC characteristics

| Parameter | Symbol | Values | | | Unit | Note or test condition |
|-------------------------------|----------|--------|------|------|------|--------------------------|
| | | Min. | Typ. | Max. | | |
| Trigger voltage ³⁾ | V_{tr} | – | 9.5 | 12.5 | V | |
| Holding voltage | V_h | 5.5 | 6.5 | 9.5 | V | $I_t = 0.5 \text{ mA}$ |
| | | 6.1 | 7.5 | 9.0 | | $I_t = 1 \text{ mA}$ |
| Leakage current | I_L | – | 0.1 | 20 | nA | $V_{WM} = 5.5 \text{ V}$ |

Table 5 AC characteristics

| Parameter | Symbol | Values | | | Unit | Note or test condition |
|-------------------|--------|--------|------|------|------|--------------------------------------|
| | | Min. | Typ. | Max. | | |
| Line capacitance | C_L | – | 0.28 | 0.38 | pF | $V = 0 \text{ V}, f = 1 \text{ MHz}$ |
| | | – | 0.22 | 0.38 | | $V = 0 \text{ V}, f = 1 \text{ GHz}$ |
| Series inductance | L_S | – | <0.1 | – | nH | Extracted from S-parameters |

Table 6 Protection characteristics

| Parameter | Symbol | Values | | | Unit | Note or test condition |
|--|-----------|--------|------|------|----------|--------------------------|
| | | Min. | Typ. | Max. | | |
| Clamping voltage (TLP) ^{4) 5)} | V_{cl} | – | 11 | – | V | $I_{TLP} = 4 \text{ A}$ |
| | | – | 14.2 | – | | $I_{TLP} = 8 \text{ A}$ |
| | | – | 20 | 27 | | $I_{TLP} = 16 \text{ A}$ |
| | | – | 30.5 | 41 | | $I_{TLP} = 30 \text{ A}$ |
| Clamping voltage (8/20 μs) ⁶⁾ | | – | 8.5 | 12 | V | $I_{PP} = 1 \text{ A}$ |
| | | – | 11 | 18.5 | | $I_{PP} = 2.5 \text{ A}$ |
| Dynamic resistance ⁴⁾ | R_{dyn} | – | 0.78 | – | Ω | |

³ Verified by design.

⁴ TLP parameters: $Z_0 = 50 \Omega$, $t_p = 100 \text{ ns}$, $t_r = 0.6 \text{ ns}$, averaging window 30-60 ns.

⁵ Refer to application note AN210 [\[2\]](#)
⁶ $t_p = 8/20 \mu\text{s}$. Stress pulse based on IEC61000-4-5.

3 Thermal characteristics

3 Thermal characteristics

Table 7 Thermal resistance

| Parameter | Symbol | Values | | Unit | Note or Test Condition |
|--------------------|------------|--------|------|------|----------------------------|
| | | Min. | Max. | | |
| Thermal resistance | R_{thJS} | - | 330 | K/W | Junction - soldering point |

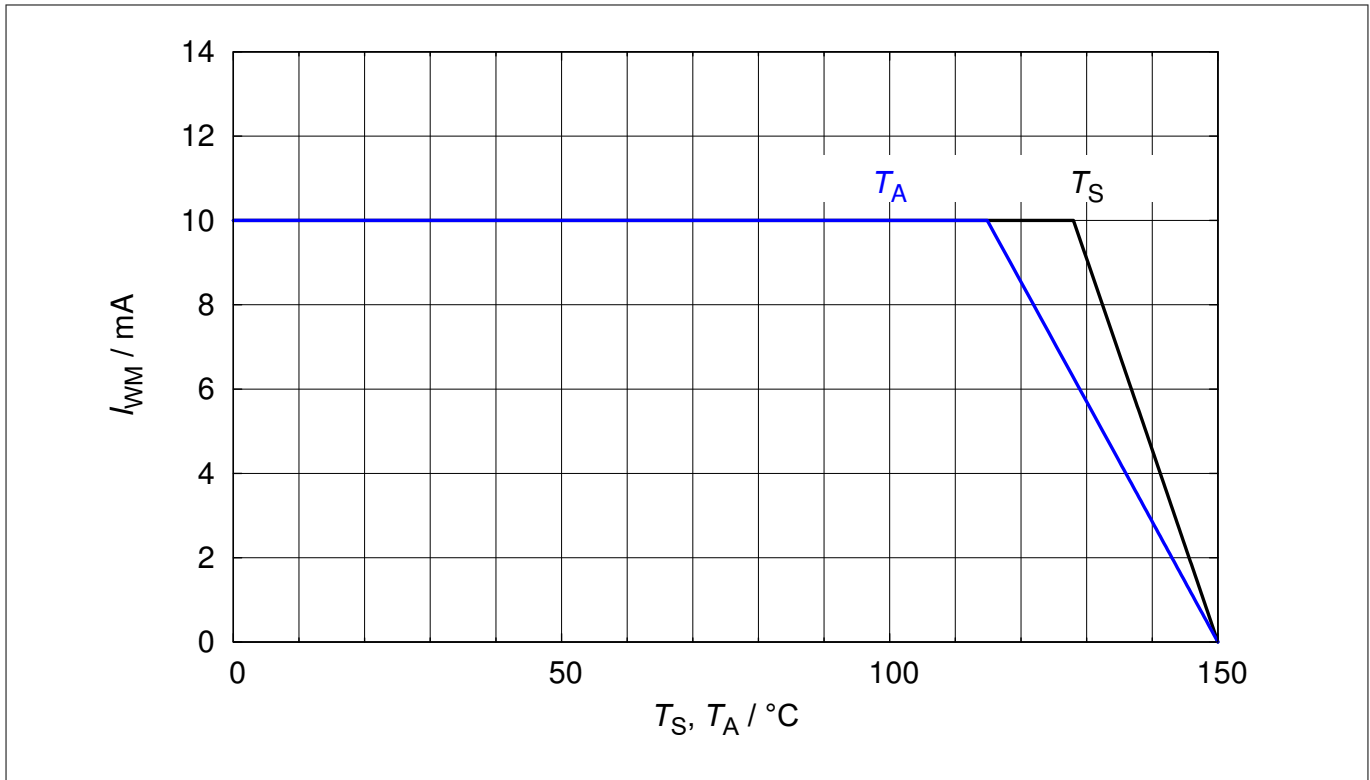


Figure 3 Maximal working current: $I_{WM} = f(T_S, T_A)$, device mounted on PCB with $R_{th} = 200$ K/W

4 Typical characteristic diagrams

4 Typical characteristic diagrams

Note: $T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified.

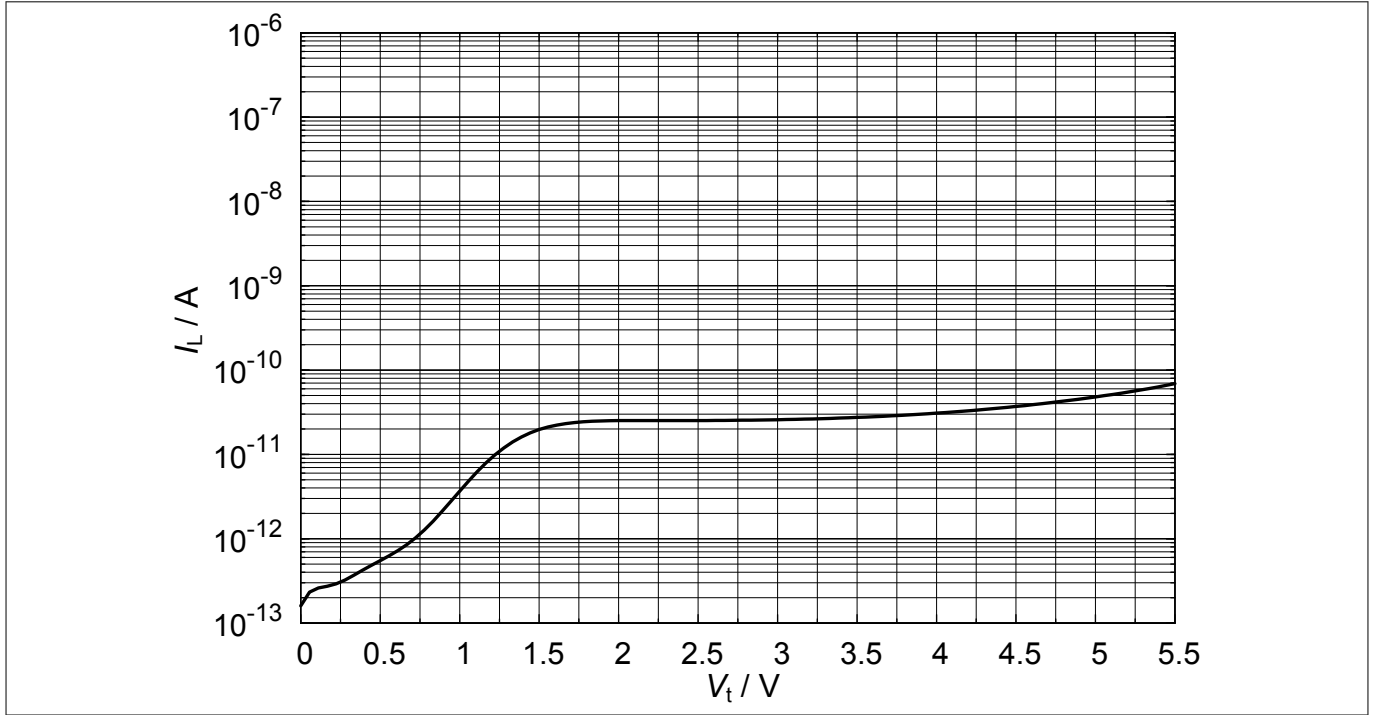


Figure 4 Leakage current: $I_L = f(V_t)$

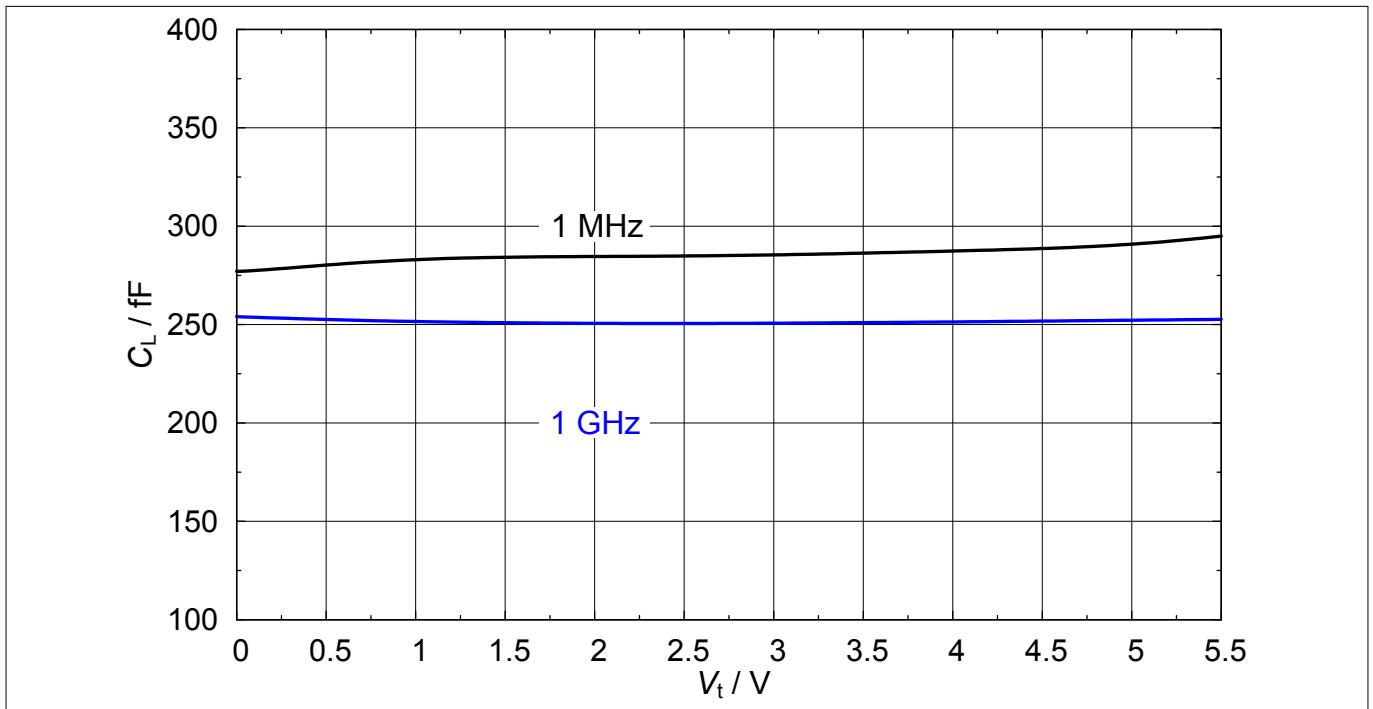


Figure 5 Line capacitance: $C_L = f(V_t)$, $f = 1\text{ MHz}, 1\text{ GHz}$

4 Typical characteristic diagrams

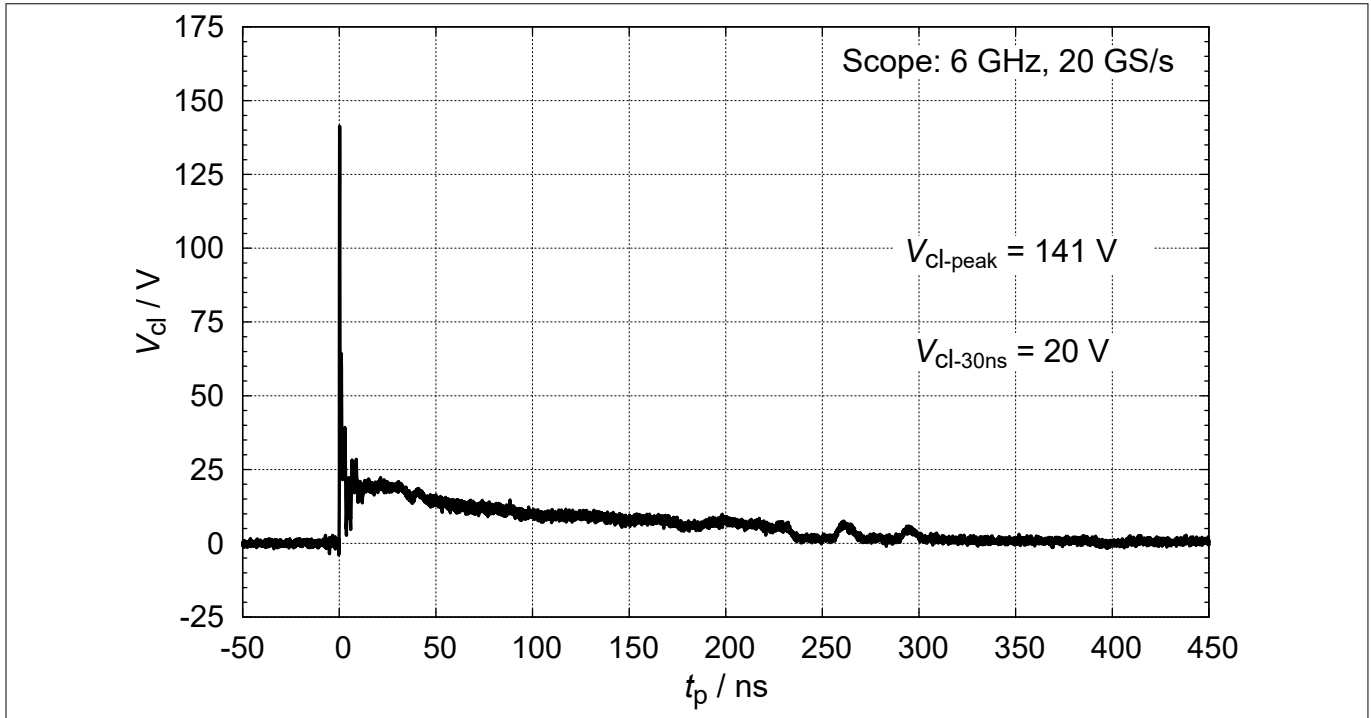


Figure 6 Clamping voltage (ESD): $V_{cl} = f(t_p)$, 8 kV positive pulse based on IEC61000-4-2

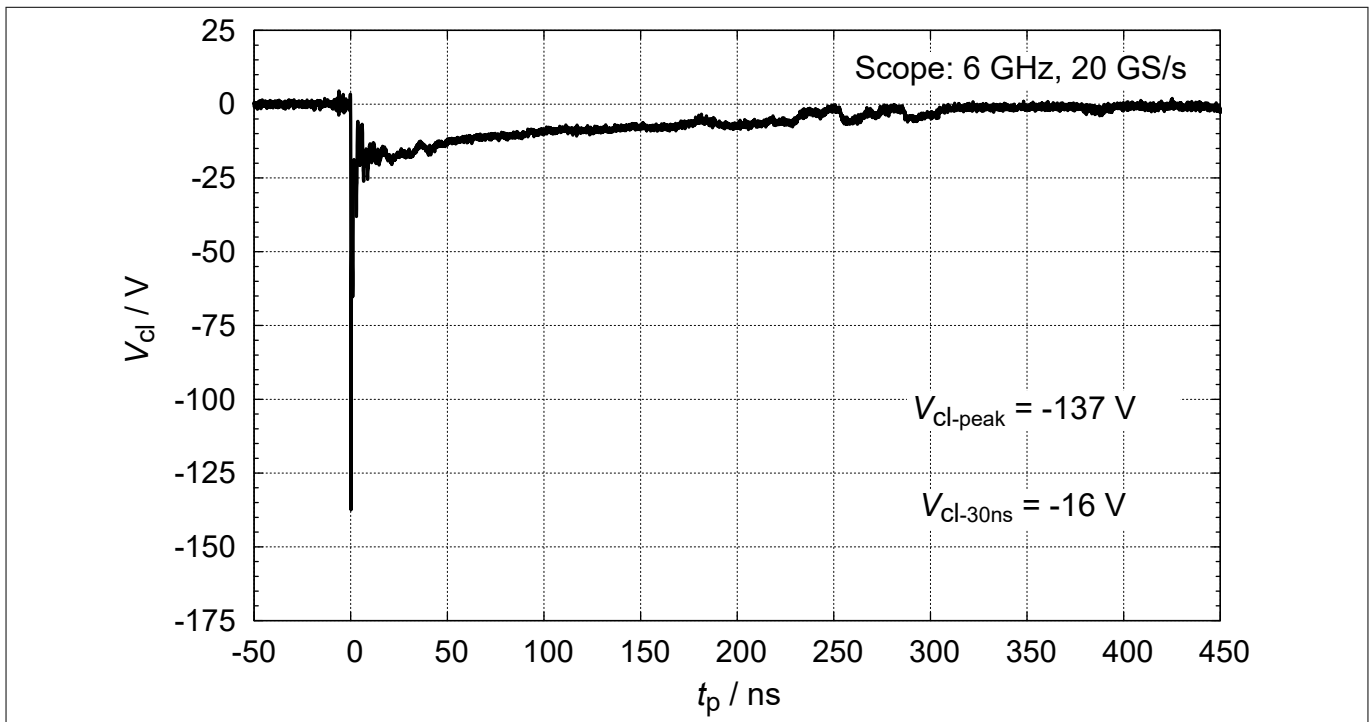


Figure 7 Clamping voltage (ESD): $V_{cl} = f(t_p)$, 8 kV negative pulse based on IEC61000-4-2

4 Typical characteristic diagrams

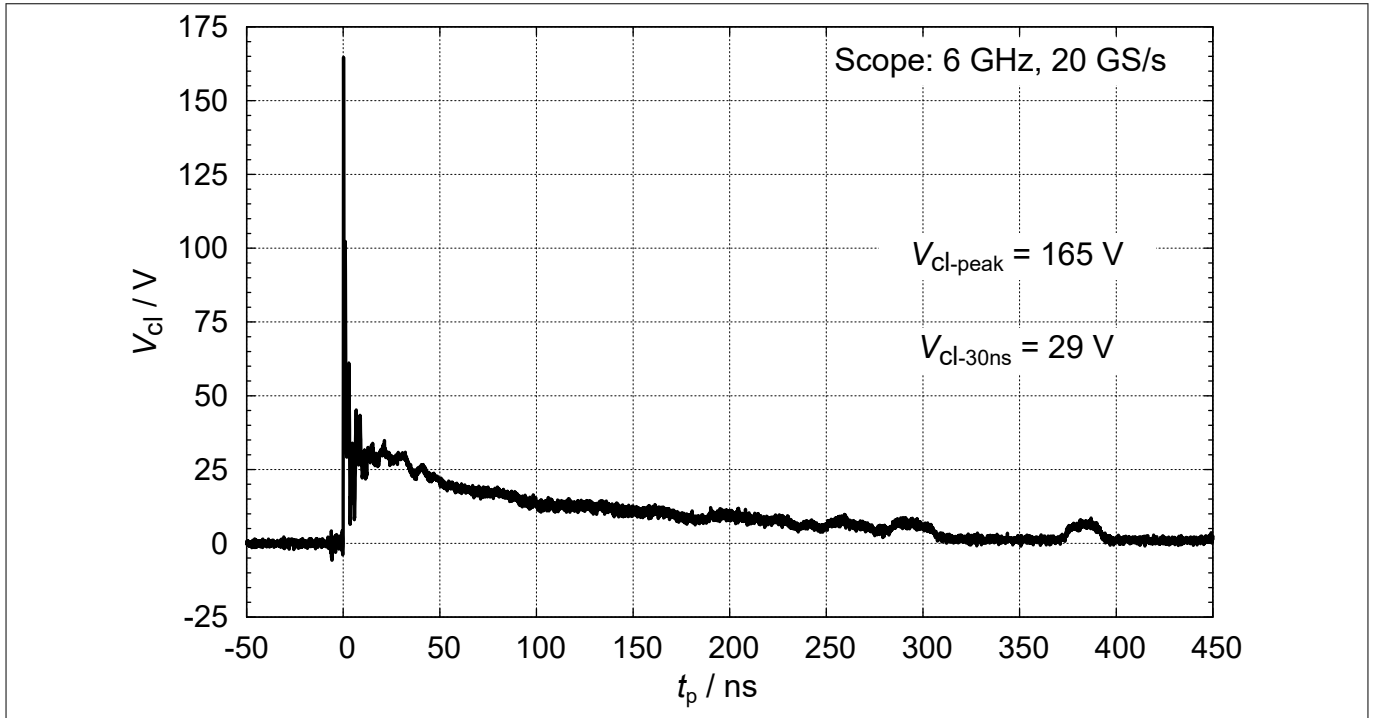


Figure 8 Clamping voltage (ESD): $V_{cl} = f(t_p)$, 15 kV positive pulse based on IEC61000-4-2

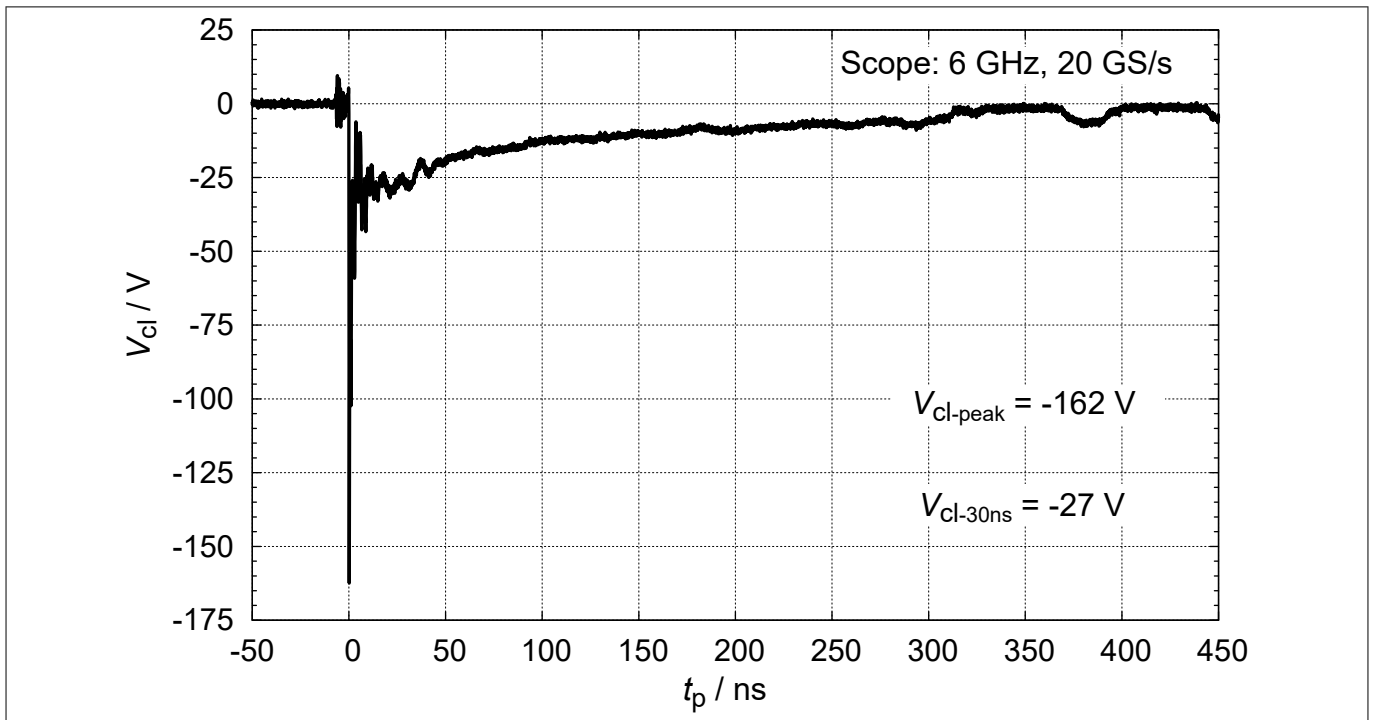


Figure 9 Clamping voltage (ESD): $V_{cl} = f(t_p)$, 15 kV negative pulse based on IEC61000-4-2

4 Typical characteristic diagrams

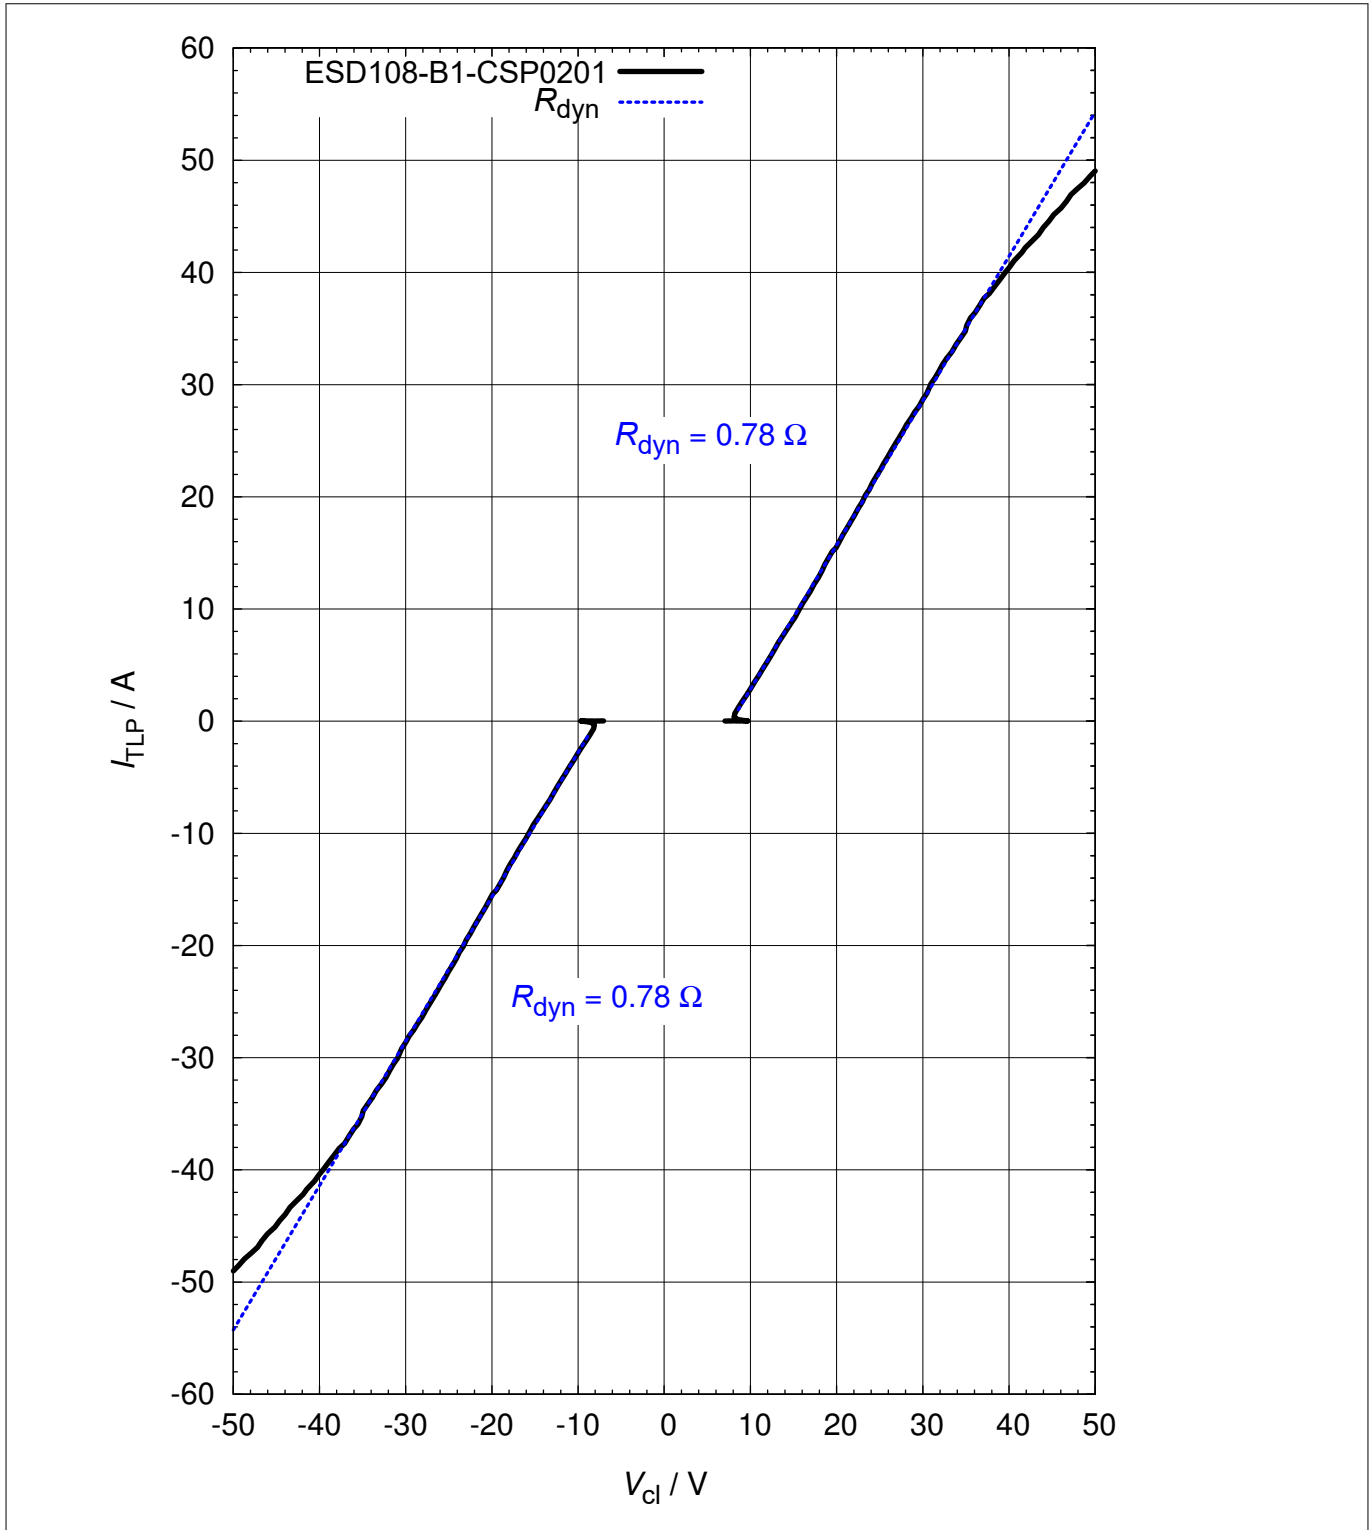


Figure 10 Clamping voltage (TLP): $I_{TLP} = f(V_{cl})$

4 Typical characteristic diagrams

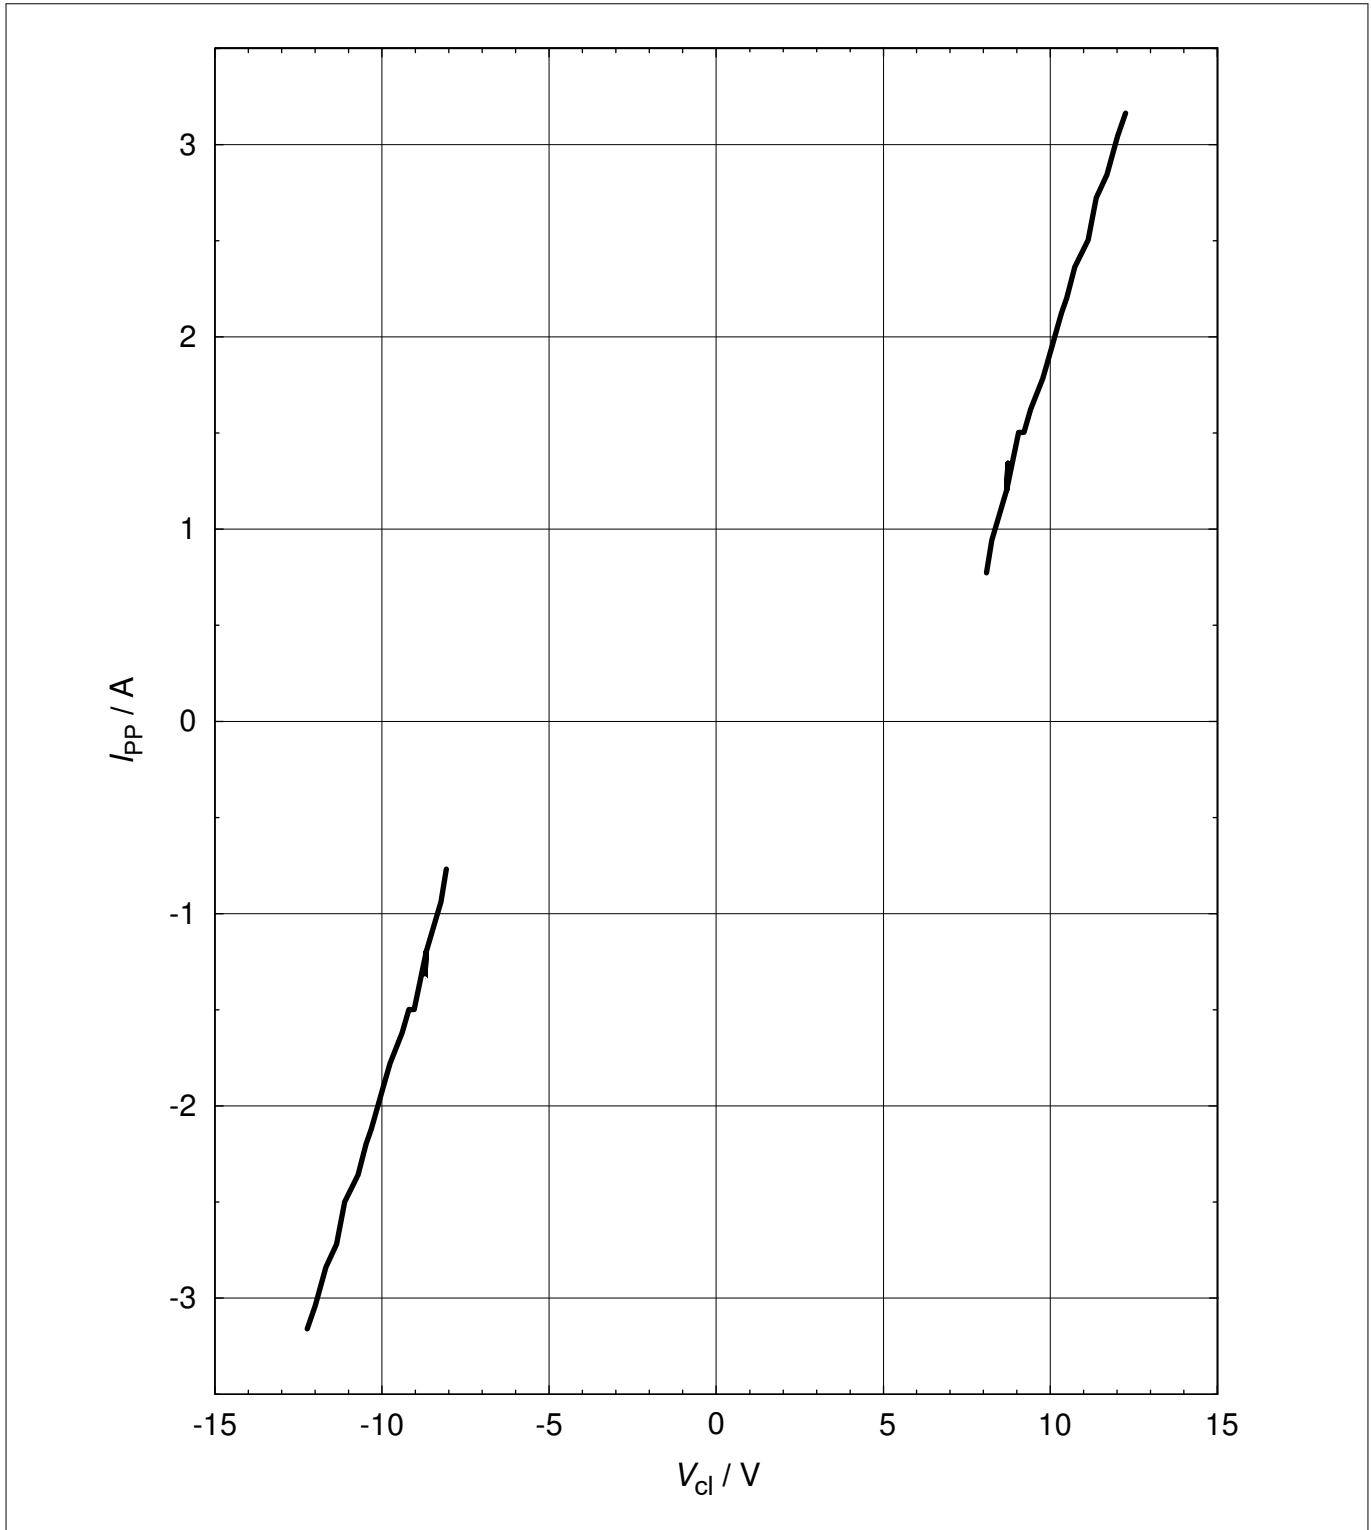


Figure 11 Clamping voltage (Surge): $I_{PP} = f(V_{Cl})$, based on IEC61000-4-5

4 Typical characteristic diagrams

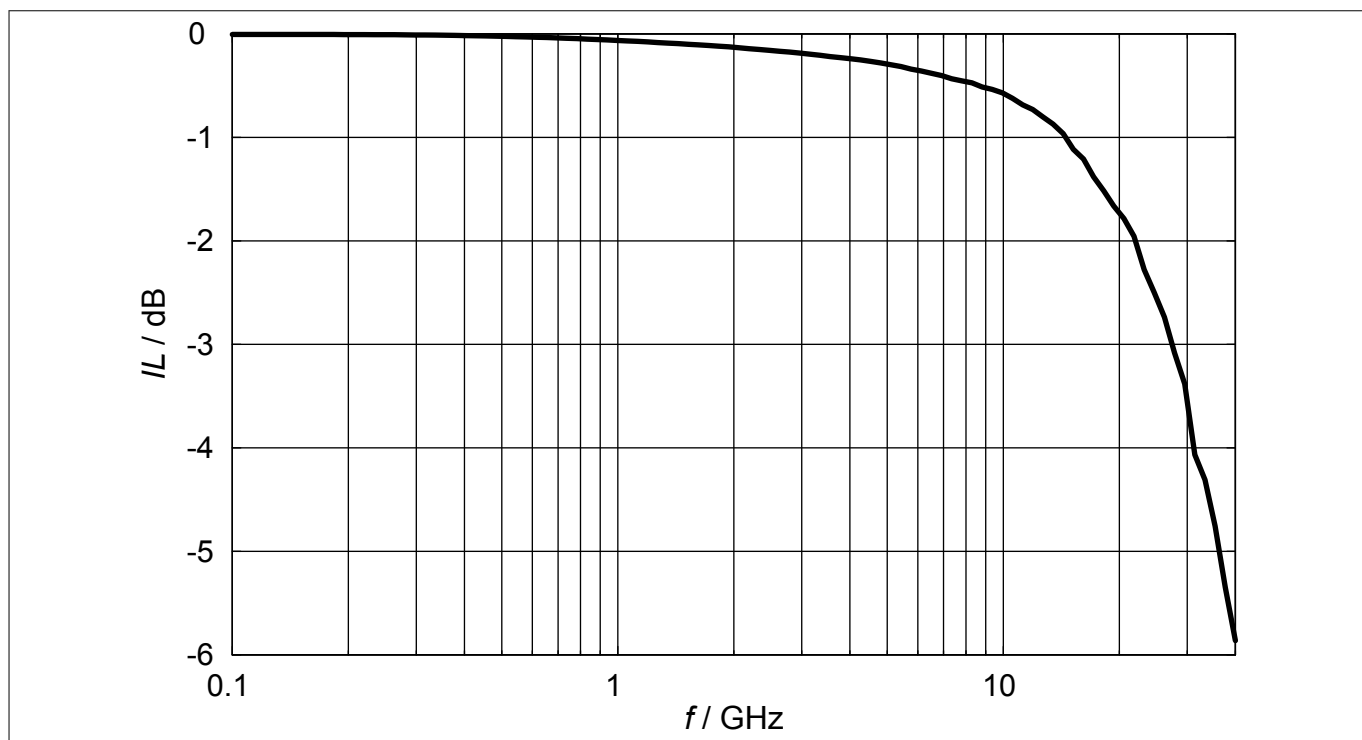


Figure 12 Insertion loss $IL = f(f)$, measured in a 50 Ω system

5 Package information WLL-2-1

5 Package information WLL-2-1

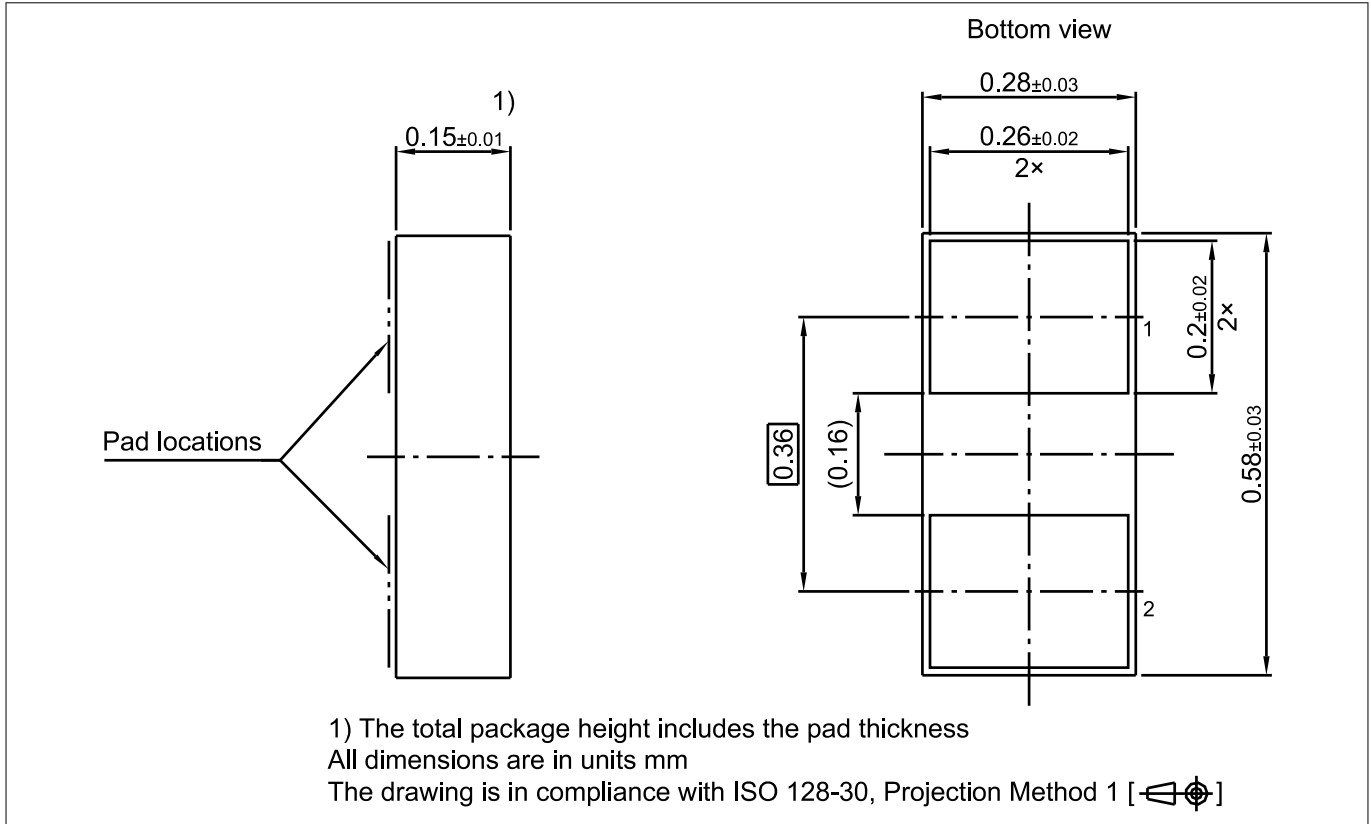


Figure 13 WLL-2-1 package

Note: For package information including footprint, packing and assembly recommendation refer to:

<https://www.infineon.com/packages/SG-WLL-2-1/>

6 References**6 References**

| | |
|-----|---|
| [1] | Infineon AG - Understanding ESD protection device characteristics |
| [2] | Infineon AG - Application note AN210 : Effective ESD Protection Design at System Level Using VF-TLP Characterization Methodology |

7 Revision history

| Document version | Date of release | Description of changes |
|------------------|-----------------|--|
| v2.0 | 2020-07-30 | <ul style="list-style-type: none">New datasheet layout and values updated. |
| | | |

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2020-07-30

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2020 Infineon Technologies AG

All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference

IFX-dnd1584021982797

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Infineon](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D12V0H1U2WS-7](#) [D18V0L1B2LP-7B](#) [82356050220](#) [D5V0F4U5P5-7](#) [D5V0M5U6V-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#)
[P6KE39CA-TP](#) [P6KE8.2A](#) [SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ8.0A](#) [SMLJ30CA-TP](#) [ESD112-B1-02EL E6327](#)
[ESD119B1W01005E6327XTSA1](#) [ESD5V0J4-TP](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)
[SCM1293A-04SO](#) [ESD203-B1-02EL E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [82356240030](#)
[VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDUR24V-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#)
[D1213A-02WL-7](#) [ESDLIN1524BJ-HQ](#) [5KP100A](#) [5KP15A](#)