



AUDIO  
TECHNOLOGIES®

## XLR CHASSIS CONNECTORS

### 4 PIN E SERIES - HORIZONTAL PCB MOUNT

Locking horizontal PCB mount 4 pin chassis connector with plastic body perfect for use in DC power, aviation, communications, and other AV applications.

Other Available Mounting Option: Vertical PCB Mount

## SPECIFICATIONS

### PRODUCT

Gender: **Male (IO-XLR4-M-EH)**

**Female (IO-XLR4-F-EH)**

Contacts: **4**

### ELECTRICAL

Capacitance Between Contacts: **≤ 3.3 pF**

Capacitance Between Contact and Ground: **≤ 2.9 pF**

Contact Resistance: **< 6 mΩ**

Insulation Resistance: **≥ 5000 MΩ**

Dielectric Strength: **1500V @ 60s**

Current Rating: **3A / 50V AC**

Grounding: **Separate ground terminal. Grounds to shell of mating connector and panel**

### ENVIRONMENTAL

Standard Compliance: **IEC 61076-2-103**

UL Flammability Rating: **UL94 V-0**

Temperature Range: **-40°C ~ +70° C (-40°F ~ +158°F)**



**IO-XLR4-M-EH**



**IO-XLR4-F-EH**

### MECHANICAL

Lifetime: **> 1000 Mating Cycles**

Wiring: **Horizontal PCB Mount**

Locking Device: **Latch Lock**

Mounting Direction: **Rear**

Solderability: **Complies with IEC 60068-2-20**

### MATERIAL

Contacts: **Gold Plated Brass**

Ground Terminal: **Nickel Plated Brass**

Shell: **Polyamide**

Shell Finish: **Black**

Push Button: **Nickel Plated Brass**


Latch: **Nickel Plated Carbon Steel**

Product specifications may change without prior notification

Io Audio Technologies® is a registered trademark of Knight Electronics, Inc.  
10557 Metric Dr. Dallas, TX 75243 | 214-340-0265 | 800-323-2439 | Fax: 214-340-5870 |  
[www.ioaudiotechnologies.com](http://www.ioaudiotechnologies.com)



## Panel Cutout

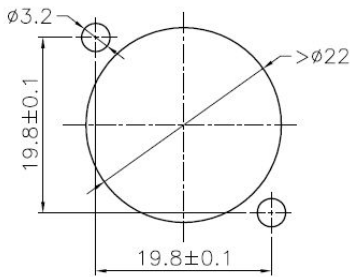

## FEATURES & APPLICATIONS

E Series XLR chassis connectors offer the most cost-effective solution for design-in applications where the termination method is to a printed circuit board. The small footprint makes this our XLR receptacle with the highest packing density available. These connectors feature a compact all plastic housing with precision machined, one piece, gold plated contacts to help prolong the useful life of the connectors. They also come with a separate nickel plated ground pin that grounds the connector to the panel. The compact form factor of these connectors makes them perfect for situations where space saving is a priority or space for a connector is limited.

Available in 3, 4, or 5 pin, Male or Female variations with options for vertical or horizontal PCB mounting.

### PART NUMBER BREAKDOWN:

IO-**XLR**4-M-EH  
Series Identifier  
IO-**XLR**4-M-EH  
Number of Pins  
IO-**XLR**4-**M**-EH  
Gender  
IO-**XLR**4-M-**E**H  
Series Identifier  
IO-**XLR**4-M-**E**H  
H = Horizontal PCB Mount  
V = Vertical PCB Mount

### STANDARDS & CLASSIFICATIONS



Product specifications may change without prior notification

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [XLR Connectors](#) category:*

*Click to view products by [IO Audio Technologies](#) manufacturer:*

Other Similar products are found below :

[HA16PRQ-3SE\(71\)](#) [AAA4FWZ](#) [AAA4MWZ](#) [AC5FPZB](#) [DE4MW](#) [E3MBAUSW](#) [99.265.0400.0](#) [AC4-FCP](#) [AQG4F](#) [3FD-V-I-B](#) [3MD-V-I-B](#)  
[TA01](#) [TA3MWX](#) [TA5MLWX](#) [TRASM4M1X](#) [3FD-L-I-\(O\)](#) [DHNF-BAG-O](#) [E3FBAUSW](#) [E3FSW](#) [TA4FLWX](#) [TA6FLWX](#) [WP2S4P](#)  
[WP1S1](#) [WP1B2](#) [TA5FLWX](#) [NC3FEZY-P](#) [NC3FG-V](#) [NC6FSD-LX](#) [NC6MSD-LX](#) [NCJ6FK-V](#) [NCXX-PROMO](#) [NC3FD-L](#) [NC3FD-L-0-1](#)  
[NC3FX-1-D](#) [NC3MX-1-D](#) [NC3MXY-B](#) [NC5FDM3-V-BAG](#) [SL04](#) [AC3-FIC](#) [E3MBSW](#) [AC6AMJ-AU](#) [TRG4MX](#) [352AX](#) [AC5MJ BULK](#)  
[HA-3MXX](#) [CP3000](#) [CP3001](#) [CP30241](#) [R6FZ](#) [TA5MWX](#)