

IB125230

INDUCTIVE SENSORS • NORM SWITCHING DISTANCE

sensor inductive, M12x1 75long, Flush, Sn: 2, Two-wire NC, MC-connector 3pin, IP67, Brass Nickel-plated



MECHANICAL FEATURES

| | |
|--|------------------------|
| Active area material of sensor | PBT |
| Alignment of cable entry | Axial |
| Ambient temperature | -25 °C ... 70 °C |
| Cable infeed | Axial |
| Degree of protection (IP) | IP67 |
| Design | Cylinder, screw-thread |
| Housing coating | Nickel-plated |
| Housing material | Brass |
| Mechanical mounting condition for sensor | Flush |
| Pressure-proof | - |
| Sensor length | 75 mm |
| Thread pitch | 1 mm |
| Thread size, metric | 12 |

ELECTRICAL FEATURES

| | |
|--|-------------------------|
| Cascadable | - |
| Number of pins | 3 |
| Rated switching current | 300 mA |
| Short-circuit protection | + |
| Suitable for safety functions | - |
| Supply voltage | 20 V ... 250 V |
| Switching distance | 2 mm |
| Switching frequency | 30 Hz |
| Type of electrical connection | MC-connector |
| Type of switching function | Normally closed contact |
| Type of switching output | Two-wire |
| Voltage type | AC/DC |
| With monitoring function of downstream devices | - |


Other

| | |
|----------------------|------------------------|
| Packaging dimensions | 100mm x 12.0mm x 120mm |
| Shipping weight | 0.03kg |
| Tariff code | 85365080 |


Classification

| | |
|-------------------|----------|
| ipf product group | 203 |
| eClass 8.0 | 27270101 |
| eClass 9.0 | 27270101 |
| eClass 9.1 | 27270101 |
| ETIM-5.0 | EC002714 |
| ETIM-6.0 | EC002714 |
| ETIM-7.0 | EC002714 |

Connection

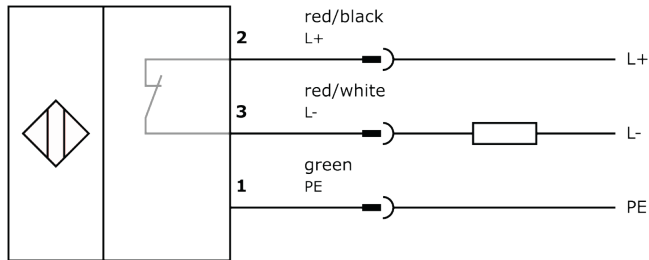

Dimensional drawing

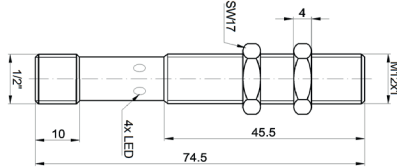

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality. LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Proximity Sensors](#) category:

Click to view products by [IPF ELECTRONIC](#) manufacturer:

Other Similar products are found below :

[01.001.5653.1](#) [70.340.1028.0](#) [70.360.2428.0](#) [70.364.4828.0](#) [70.810.1053.0](#) [72.360.1628.0](#) [73.363.6428.0](#) [8027AL20NL2CPXX](#) [FYCC8E1-2](#)
[9221350022](#) [922AA2W-A9P-L](#) [PLS2](#) [GL-12F-C2.5X10\(LOT3\)](#) [972AB2XM-A3N-L](#) [972AB3XM-A3P-L](#) [PS3251](#) [980659-1](#) [QT-12](#) [E2E2-](#)
[X5M41-M4](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2EX2ME2N](#) [E2EX3D1SM1N](#) [E2E-X4MD1-G](#) [E2E-X5E1-5M-N](#) [E2E-X5Y2-N](#) [E2E-X7D1-](#)
[M1J-T-0.3M-N](#) [E2K-F10MC1](#) [5M](#) [EH-302](#) [EI3010TBOP](#) [EI5515NPAP](#) [MS605AU](#) [EP175-32000](#) [IFRM04N35B1/L](#) [IFRM04P1513/S35L](#)
[IFRM06P1703/S35L](#) [IFRM08P1501/S35L](#) [IFRM12N17G3/L](#) [IFRM12P17G3/L](#) [IFRM12P3502/L](#) [IFRM12P37G1/S14L](#) [ILFK12E9189/I02](#)
[ILFK12E9193/I02](#) [IMM2582C](#) [OISN-013](#) [25.161.3253.0](#) [25.332.0653.1](#) [25.352.0653.0](#) [25.352.0753.0](#) [25.523.3253.0](#)