

Customer Part:

Description

- Temperature compensated crystal oscillator (TCXO) in a hermetically sealed 3.2x2.5mm SMD package.
- Model IQXT-220-1
- Model Issue number 3

Frequency Parameters

- Frequency 19.20MHz
- Frequency Tolerance ± 1.00 ppm
- Frequency Stability ± 0.28 ppm
- Operating Temperature Range -40.00 to 85.00°C
- Ageing ± 0.02 ppm max/day, ± 1 ppm max/year
- Frequency Tolerance: Measurement referenced to frequency observed with $T_A=25^{\circ}\text{C}$, $V_s=3.3\text{V}$ and load= $10\text{k}\Omega//10\text{pF}$, within 30 days after ex-works.
- Frequency Stability: T_A varied across the operating temperature range, measurement referenced to frequency observed with $f_{\text{ref}}=(f_{\text{max}}+f_{\text{min}})/2$, $V_s=3.3\text{V}$, load= $10\text{k}\Omega//10\text{pF}$ and temperature variable speed less than $2^{\circ}\text{C}/\text{min}$.
- Ageing: V_s , T_A and load constant, measurement referenced to frequency observed with $T_A=25^{\circ}\text{C}$, $V_s=3.3\text{V}$, load= $10\text{k}\Omega//10\text{pF}$ and after 1hr of operation.
- Supply Voltage Variation (measurement referenced to frequency observed $T_A=25^{\circ}\text{C}$, V_s varied from 3.13V to 3.47V and load= $10\text{k}\Omega//10\text{pF}$): ± 0.1 ppm max
- Load Variation (measurement referenced to frequency observed with $T_A=25^{\circ}\text{C}$, $V_s=3.3\text{V}$ and load change= $10\text{k}\Omega//10\text{pF} \pm 5\%$): ± 0.1 ppm max

Electrical Parameters

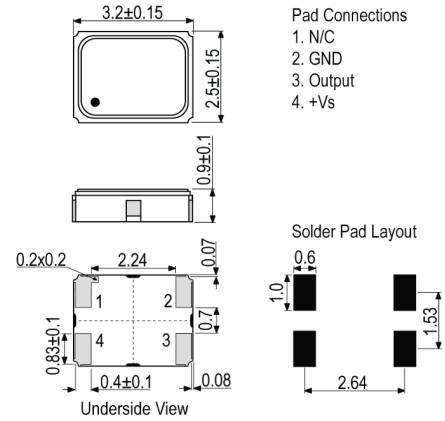
- Supply Voltage $3.3\text{V} \pm 5\%$
- Current Draw 5.000mA
- Current Consumption (@ $T_A=25^{\circ}\text{C}$, $V_s=3.3\text{V}$ and load= $10\text{k}\Omega//10\text{pF}$): 5mA max

Output Details

- Output Compatibility Clipped Sine
- Drive Capability $10\text{k}\Omega//10\text{pF}$
- Output Voltage Level: 0.8V pk-pk min

Noise Parameters

- Phase Noise @ 25°C ($F=10.0\text{MHz}$, typ):
 - 90dBc/Hz @ 10Hz
 - 120dBc/Hz @ 100Hz
 - 140dBc/Hz @ 1kHz
 - 145dBc/Hz @ 10kHz
 - 148dBc/Hz @ 100kHz

Outline (mm)

Sales Office Contact Details:

UK: +44 (0)1460 270200

France: 0800 901 383

 Email: info@iqdfrequencyproducts.com

Germany: 0800 1808 443

USA: +1.760.318.2824

 Web: www.iqdfrequencyproducts.com

Customer Part:**Environmental Parameters**

- Operable Temperature Range: -40 to 85°C
- Storage Temperature Range: -55 to 105°C
- ESD Levels:
ESD Human Body Model (JEDEC JS-001-2010): Class 2:
2000V to 4000V
ESD Machine Model (JEDEC JESD22-A115C): Class B: 200V
to 400V
- Shock: IEC 60068-2-27, Test Ea, Severity 50A: 100G
acceleration for 6ms, half sine wave, 3 times in 3 mutually
perpendicular planes.
- Vibration: IEC 60068-2-06, Test Fc: 10Hz-2000Hz, 0.75mm
amplitude, 10G acceleration, 30mins per cycle, 3 times in 3
mutually perpendicular planes, test duration 2hrs.

Manufacturing Details

- Storage Conditions:
Temperature: -10 to 35°C
Humidity: 20 to 70% RH
- RoHS Terminations Ni (1µm~9µm), Au (0.5µ~1µm)
- RoHS Reflow Temp 260°C max for 30sec max

Compliance

- RoHS Status (2015/863/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): 2

Packaging Details

- Pack Style: Cutt Cut tape
Pack Size: 100
- *Alternative packing option available*

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TCXO Oscillators](#) category:

Click to view products by [IQD](#) manufacturer:

Other Similar products are found below :

[SiT5000AI-3D-33E0-10.000000X](#) [THD3031035LK280005-10.0M](#) [AST3TDATAACJ5-10.0000MHz](#) [AST3TDATAACJ5-20.0000MHz](#)
[AST3TDA53TACJ2-19.2000MHz](#) [AST3TDA53TACJ2-38.8800MHz](#) [AST3TDATAACJ5-19.2000MHz](#) [AST3TDATAACJ5-38.8800MHz](#)
[SiT5155AI-FK-33E0-10.000000F](#) [CVT32-10.000](#) [SIT5356AI-FQ-33E0-25.000000X](#) [SIT5357AI-FQ-33N0-100.000000X](#) [DS32KHZSN+T&R](#)
[XTCLH25M000THJA0P0](#) [LFTCXO075793Cutt](#) [LFTCXO077229Cutt](#) [LFPTXO000002Bulk](#) [LFTCXO077228Cutt](#) [LFTCXO077230Cutt](#)
[LFTCXO075792Cutt](#) [AST3TQ53-T-10.000MHz-5-C](#) [ATX-11-F-26.000MHz-F05-T](#) [ATX-11-F-27.000MHz-F05-T](#) [ATX-12-F-32.000MHz-](#)
[F05-T](#) [ATX-13-F-26.000MHz-F05-T](#) [I538-2O7- 25.000 MHz](#) [I537-2O7- 39.000 MHz](#) [I537-2O7- 25.000 MHz](#) [ECS-TXO-2016-33-320-TR](#)
[ECS-TXO-2016-33-120-TR](#) [ECS-TXO-2016-33-250-TR](#) [ECS-TXO-2016-33-200-TR](#) [ECS-TXO-20CSMV-AC-260-AY-TR](#) [TG2016SMN](#)
[26.0000M-MCGNNM0](#) [TG2016SMN 25.0000M-MCGNNM0](#) [TG2016SMN 25.0000M-MCGNNM3](#) [TG2520SMN 16.0000M-MCGNNM0](#)
[TG2520SMN 25.0000M-MCGNNM0](#) [TG2520SMN 40.0000M-ECGNNM0](#) [TG2520SMN 24.0000M-ECGNNM0](#) [TG2520SMN 20.0000M-](#)
[MCGNNM0](#) [TG2520SMN 30.0000M-ECGNNM0](#) [TG2520SMN 30.000M-MCGNNM0](#) [TG2520SMN 27.0000M-MCGNNM3](#) [TG2520SMN](#)
[32.0000M-MCGNNM3](#) [TG2520SMN 32.0000M-ECGNNM3](#) [LFPTXO000001Bulk](#) [LFTCXO063711BULK](#) [LFTCXO063713BULK](#)
[LFTCXO063715BULK](#)