

**Customer Part:**

**Description**

- Temperature compensated crystal oscillator (TCXO) in a hermetically sealed 3.2x2.5mm SMD package.
- Model IQXT-220-1
- Model Issue number 3

**Frequency Parameters**

- Frequency 20.0MHz
- Frequency Tolerance  $\pm 1.00$ ppm
- Frequency Stability  $\pm 0.28$ ppm
- Operating Temperature Range  $-40.00$  to  $85.00^{\circ}\text{C}$
- Ageing  $\pm 0.02$ ppm max/day,  $\pm 1$ ppm max/year
- Frequency Tolerance: Measurement referenced to frequency observed with  $T_A=25^{\circ}\text{C}$ ,  $V_s=3.3\text{V}$  and load= $10\text{k}\Omega//10\text{pF}$ , within 30 days after ex-works.
- Frequency Stability:  $T_A$  varied across the operating temperature range, measurement referenced to frequency observed with  $f_{\text{ref}}=(f_{\text{max}}+f_{\text{min}})/2$ ,  $V_s=3.3\text{V}$ , load= $10\text{k}\Omega//10\text{pF}$  and temperature variable speed less than  $2^{\circ}\text{C}/\text{min}$ .
- Ageing:  $V_s$ ,  $T_A$  and load constant, measurement referenced to frequency observed with  $T_A=25^{\circ}\text{C}$ ,  $V_s=3.3\text{V}$ , load= $10\text{k}\Omega//10\text{pF}$  and after 1hr of operation.
- Supply Voltage Variation (measurement referenced to frequency observed  $T_A=25^{\circ}\text{C}$ ,  $V_s$  varied from 3.13V to 3.47V and load= $10\text{k}\Omega//10\text{pF}$ ):  $\pm 0.1$ ppm max
- Load Variation (measurement referenced to frequency observed with  $T_A=25^{\circ}\text{C}$ ,  $V_s=3.3\text{V}$  and load change= $10\text{k}\Omega//10\text{pF} \pm 5\%$ ):  $\pm 0.1$ ppm max

**Electrical Parameters**

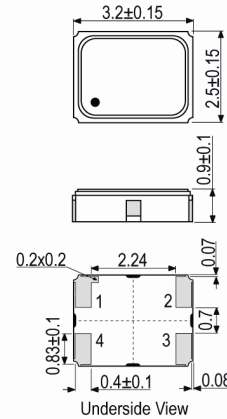
- Supply Voltage  $3.3\text{V} \pm 5\%$
- Current Draw  $5.000\text{mA}$
- Current Consumption (@  $T_A=25^{\circ}\text{C}$ ,  $V_s=3.3\text{V}$  and load= $10\text{k}\Omega//10\text{pF}$ ):  $5\text{mA}$  max

**Output Details**


- Output Compatibility Clipped Sine
- Drive Capability  $10\text{k}\Omega//10\text{pF}$
- Output Voltage Level:  $0.8\text{V}$  pk-pk min

**Noise Parameters**

- Phase Noise @  $25^{\circ}\text{C}$  ( $F=10.0\text{MHz}$ , typ):
  - 90dBc/Hz @ 10Hz
  - 120dBc/Hz @ 100Hz
  - 140dBc/Hz @ 1kHz
  - 145dBc/Hz @ 10kHz
  - 148dBc/Hz @ 100kHz

**Outline (mm)**

**Pad Connections**

1. N/C
2. GND
3. Output
4. +Vs

**Solder Pad Layout**

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
 Germany: 0800 1808 443

France: 0800 901 383  
 USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
 Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

**Customer Part:****Environmental Parameters**

- Operable Temperature Range: -40 to 85°C
- Storage Temperature Range: -55 to 105°C
- ESD Levels:
  - ESD Human Body Model (JEDEC JS-001-2010): Class 2:  
2000V to 4000V
  - ESD Machine Model (JEDEC JESD22-A115C): Class B: 200V  
to 400V
- Shock: IEC 60068-2-27, Test Ea, Severity 50A: 100G  
acceleration for 6ms, half sine wave, 3 times in 3 mutually  
perpendicular planes.
- Vibration: IEC 60068-2-06, Test Fc: 10Hz-2000Hz, 0.75mm  
amplitude, 10G acceleration, 30mins per cycle, 3 times in 3  
mutually perpendicular planes, test duration 2hrs.

**Manufacturing Details**

- Storage Conditions:
  - Temperature: -10 to 35°C
  - Humidity: 20 to 70% RH
- RoHS Terminations                      Ni (1µm~9µm), Au (0.5µ~1µm)
- RoHS Reflow Temp                        260°C max for 30sec max

**Compliance**

- RoHS Status (2015/863/EU)            Compliant
- REACH Status                              Compliant
- MSL Rating (JDEC-STD-033):            2

**Packaging Details**

- Pack Style: **Cutt**            **Cutt tape**  
Pack Size: 100
- *Alternative packing option available*

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [TCXO Oscillators](#) category:*

*Click to view products by [IQD](#) manufacturer:*

Other Similar products are found below :

[SiT5000AI-3D-33E0-10.000000X](#) [THD3031035LK280005-10.0M](#) [AST3TDATAACJ5-10.0000MHz](#) [AST3TDATAACJ5-20.0000MHz](#)  
[AST3TDA53TACJ2-19.2000MHz](#) [AST3TDA53TACJ2-38.8800MHz](#) [AST3TDATAACJ5-19.2000MHz](#) [AST3TDATAACJ5-38.8800MHz](#)  
[SiT5155AI-FK-33E0-10.000000F](#) [CVT32-10.000](#) [SIT5356AI-FQ-33E0-25.000000X](#) [SIT5357AI-FQ-33N0-100.000000X](#) [DS32KHZSN+T&R](#)  
[XTCLH25M000THJA0P0](#) [LFTCXO075793Cutt](#) [LFTCXO077229Cutt](#) [LFPTXO000002Bulk](#) [LFTCXO077228Cutt](#) [LFTCXO077230Cutt](#)  
[LFTCXO075792Cutt](#) [AST3TQ53-T-10.000MHz-5-C](#) [ATX-11-F-26.000MHz-F05-T](#) [ATX-11-F-27.000MHz-F05-T](#) [ATX-12-F-32.000MHz-](#)  
[F05-T](#) [ATX-13-F-26.000MHz-F05-T](#) [I538-2O7- 25.000 MHz](#) [I537-2O7- 39.000 MHz](#) [I537-2O7- 25.000 MHz](#) [ECS-TXO-2016-33-320-TR](#)  
[ECS-TXO-2016-33-120-TR](#) [ECS-TXO-2016-33-250-TR](#) [ECS-TXO-2016-33-200-TR](#) [ECS-TXO-20CSMV-AC-260-AY-TR](#) [TG2016SMN](#)  
[26.0000M-MCGNNM0](#) [TG2016SMN 25.0000M-MCGNNM0](#) [TG2016SMN 25.0000M-MCGNNM3](#) [TG2520SMN 16.0000M-MCGNNM0](#)  
[TG2520SMN 25.0000M-MCGNNM0](#) [TG2520SMN 40.0000M-ECGNNM0](#) [TG2520SMN 24.0000M-ECGNNM0](#) [TG2520SMN 20.0000M-](#)  
[MCGNNM0](#) [TG2520SMN 30.0000M-ECGNNM0](#) [TG2520SMN 30.000M-MCGNNM0](#) [TG2520SMN 27.0000M-MCGNNM3](#) [TG2520SMN](#)  
[32.0000M-MCGNNM3](#) [TG2520SMN 32.0000M-ECGNNM3](#) [LFPTXO000001Bulk](#) [LFTCXO063711BULK](#) [LFTCXO063713BULK](#)  
[LFTCXO063715BULK](#)