


Fast Recovery Epitaxial Diode (FRED)

DSEI 2x101

$I_{FAVM} = 2 \times 91 \text{ A}$
 $V_{RRM} = 1200 \text{ V}$
 $t_{rr} = 40 \text{ ns}$

| V_{RSM} | V_{RRM} | Type |
|-----------|-----------|-----------------|
| V | V | |
| 1200 | 1200 | DSEI 2x 101-12P |



| Symbol | Conditions | Maximum Ratings (per diode) | |
|--------------|--|-----------------------------|------------------|
| I_{FRMS} | $T_{VJ} = T_{VJM}$ | 130 | A |
| I_{FAVM} ① | $T_C = 50^\circ\text{C}$; rectangular; $d = 0.5$ | 91 | A |
| I_{FRM} | $t_p < 10 \mu\text{s}$; rep. rating; pulse width limited by T_{VJM} | tbd | A |
| I_{FSM} | $T_{VJ} = 45^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine | 900 | A |
| T_{VJ} | | -40...+150 | $^\circ\text{C}$ |
| T_{VJM} | | 150 | $^\circ\text{C}$ |
| T_{stg} | | -40...+150 | $^\circ\text{C}$ |
| P_{tot} | $T_C = 25^\circ\text{C}$ | 250 | W |
| V_{ISOL} | 50/60 Hz, RMS | $t = 1 \text{ min}$ | 2500 V~ |
| | $I_{ISOL} \leq 1 \text{ mA}$ | $t = 1 \text{ s}$ | 3000 V~ |
| M_d | Mounting torque (M4) | 1.5 - 2.0 | Nm |
| | | 14 - 18 | lb.in. |
| Weight | | 24 | g |

Features

- 2 independent FRED in 1 package
- Isolation voltage 3000 V~
- Planar passivated chips
- Leads suitable for PC board soldering
- Very short recovery time
- Soft recovery behaviour

Applications

- Antiparallel diode for high frequency switching devices
- Anti saturation diode
- Snubber diode
- Free wheeling diode in converters and motor control circuits
- Rectifiers in switch mode power supplies (SMPS)
- Inductive heating and melting
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling capability
- Low noise switching
- Small and light weight

| Symbol | Conditions | Characteristic Values (per diode) | |
|------------|---|-----------------------------------|------------------|
| | | typ. | max. |
| I_R | $T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$ | | 3.0 mA |
| | $T_{VJ} = 25^\circ\text{C}$ $V_R = 0.8 \cdot V_{RRM}$ | | 1.5 mA |
| | $T_{VJ} = 125^\circ\text{C}$ $V_R = 0.8 \cdot V_{RRM}$ | | 15 mA |
| V_F | $I_F = 100 \text{ A}$; $T_{VJ} = 150^\circ\text{C}$ $T_{VJ} = 25^\circ\text{C}$ | | 1.61 V |
| | | | 1.87 V |
| V_{T0} | For power-loss calculations only | | 1.01 V |
| r_T | $T_{VJ} = T_{VJM}$ | | 6.1 m Ω |
| R_{thJC} | | | 0.5 K/W |
| R_{thCK} | 0.05 | | K/W |
| t_{rr} | $I_F = 1 \text{ A}$; $-di/dt = 400 \text{ A}/\mu\text{s}$ $V_R = 30 \text{ V}$; $T_{VJ} = 25^\circ\text{C}$ | 40 | 60 ns |
| | | | |
| I_{RM} | $V_R = 100 \text{ V}$; $I_F = 75 \text{ A}$; $-di_F/dt = 200 \text{ A}/\mu\text{s}$ $L \leq 0.05 \mu\text{H}$; $T_{VJ} = 100^\circ\text{C}$ | 24 | 30 A |
| d_S | Creeping distance on surface | min. 11.2 | mm |
| d_A | Creeping distance in air | min. 11.2 | mm |
| a | Allowable acceleration | max. 50 | m/s ² |

① I_{FAVM} rating includes reverse blocking losses at T_{VJM} , $V_R = 0.8 V_{RRM}$, duty cycle $d = 0.5$
Data according to IEC 60747

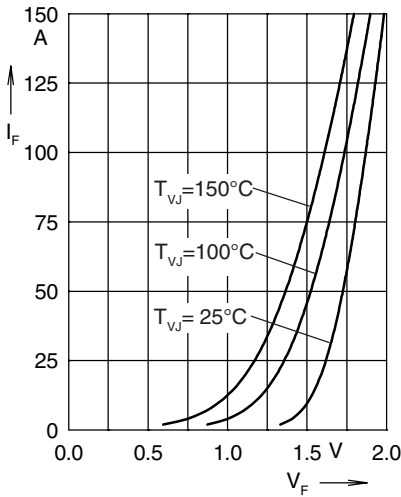


Fig. 1 Forward current I_F versus V_F

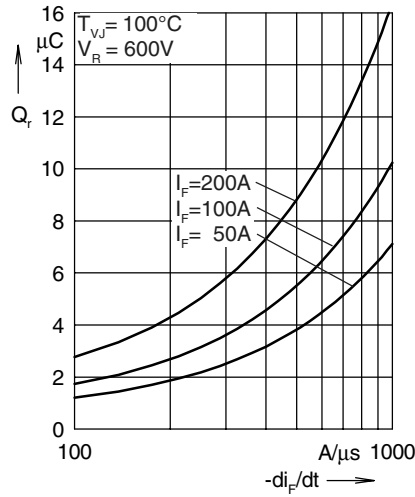


Fig. 2 Reverse recovery charge Q_r versus $-di_F/dt$

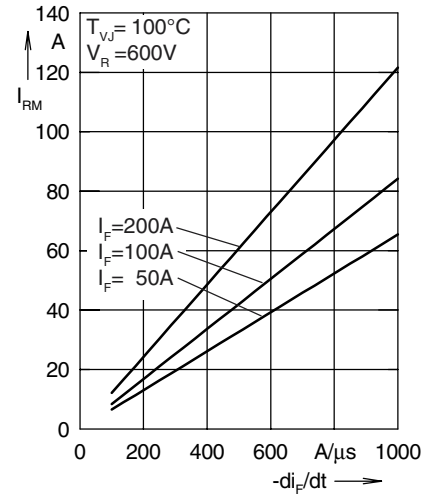


Fig. 3 Peak reverse current I_{RM} versus $-di_F/dt$

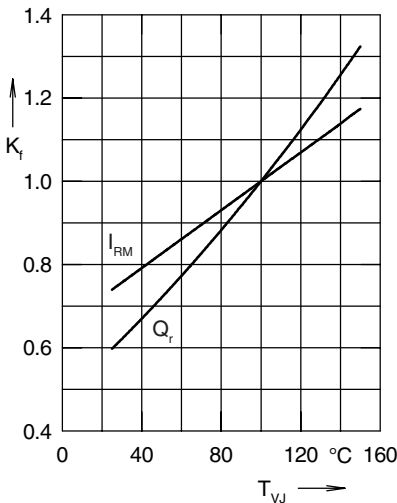


Fig. 4 Dynamic parameters Q_r , I_{RM} versus T_{VJ}

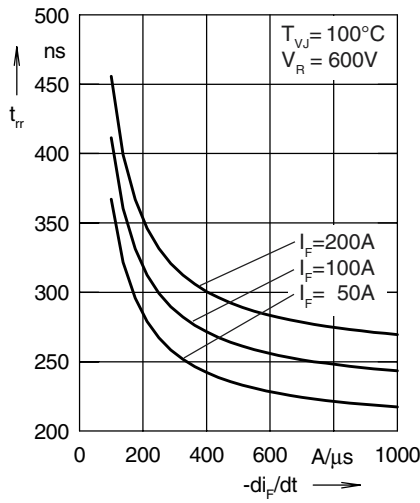


Fig. 5 Recovery time t_{rr} versus $-di_F/dt$

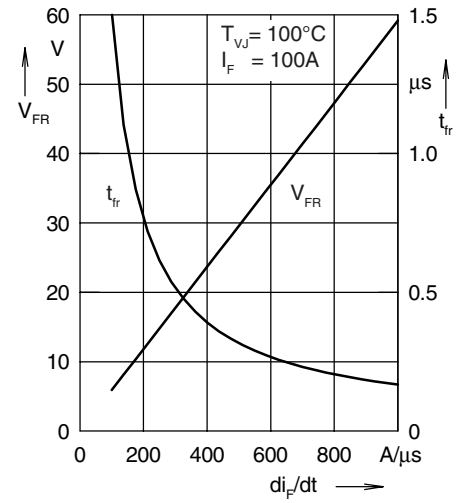


Fig. 6 Peak forward voltage V_{FR} and t_{fr} versus di_F/dt


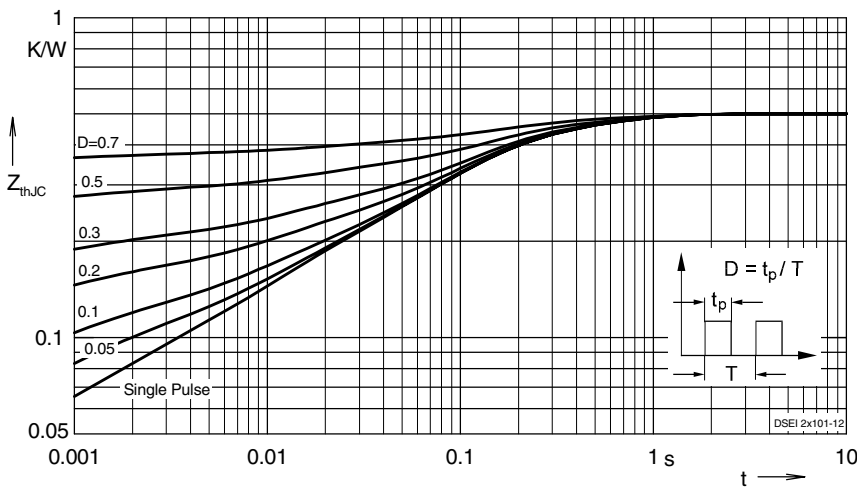


Fig. 7 Transient thermal impedance junction to case at various duty cycles

Dimensions in mm (1mm = 0.0394")

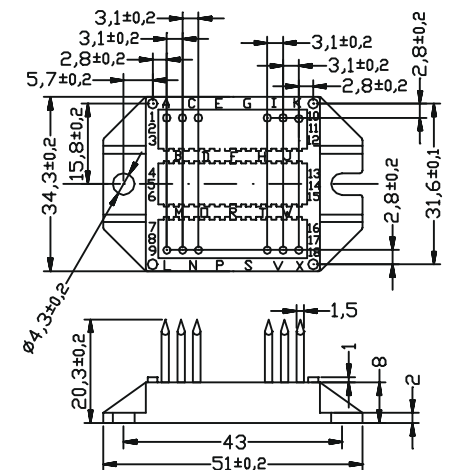

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [IXYS](#) manufacturer:

Other Similar products are found below :

[70HFR40](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [NTE5841](#) [NTE6038](#) [SCF5000](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [481235F](#)
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [ACGRA4007-HF](#) [ACGRB207-HF](#)
[CLH03\(Te16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [NTE6002](#) [NTE6023](#) [NTE6039](#) [NTE6077](#) [85HFR60](#) [40HFR60](#)
[70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#) [VS-12FL100S10](#) [ACGRA4001-](#)
[HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE5990](#) [NTE6358](#) [NTE6162](#) [NTE5850](#) [SKN300/16](#)