


**Polar™ Power MOSFET  
HiPerFET™**


N-Channel Enhancement Mode  
Avalanche Rated  
Fast Intrinsic Diode

**IXFB40N110P**



**$V_{DSS}$  = 1100V  
 $I_{D25}$  = 40A  
 $R_{DS(on)}$  ≤ 260mΩ  
 $t_{rr}$  ≤ 300ns**

**PLUS264™ (IXFB)**

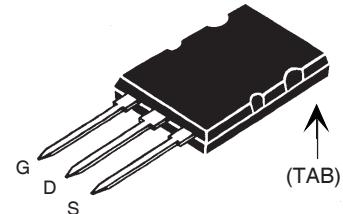

G = Gate      D = Drain  
S = Source      TAB = Drain

Symbol	Test Conditions	Maximum Ratings		
$V_{DSS}$	$T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$	1100	V	
$V_{DGR}$	$T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$ , $R_{GS} = 1\text{M}\Omega$	1100	V	
$V_{GSS}$	Continuous	$\pm 30$	V	
$V_{GSM}$	Transient	$\pm 40$	V	
$I_{D25}$	$T_C = 25^\circ\text{C}$	40	A	
$I_{DM}$	$T_C = 25^\circ\text{C}$ , pulse width limited by $T_{JM}$	100	A	
$I_{AR}$	$T_C = 25^\circ\text{C}$	20	A	
$E_{AS}$	$T_C = 25^\circ\text{C}$	2	J	
$dV/dt$	$I_S \leq I_{DM}$ , $V_{DD} \leq V_{DSS}$ , $T_J \leq 150^\circ\text{C}$	15	V/ns	
$P_D$	$T_C = 25^\circ\text{C}$	1250	W	
$T_J$		-55 ... +150	$^\circ\text{C}$	
$T_{JM}$		150	$^\circ\text{C}$	
$T_{stg}$		-55 ... +150	$^\circ\text{C}$	
$T_L$	1.6mm (0.062 in.) from case for 10s	300	$^\circ\text{C}$	
$T_{SOLD}$	Plastic body for 10s	260	$^\circ\text{C}$	
$F_c$	Mounting force	30..120/6.7..27	N/lb.	
<b>Weight</b>		10	g	

Symbol	Test Conditions ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)	Characteristic Values		
		Min.	Typ.	Max.
$BV_{DSS}$	$V_{GS} = 0\text{V}$ , $I_D = 3\text{mA}$	1100		V
$V_{GS(th)}$	$V_{DS} = V_{GS}$ , $I_D = 1\text{mA}$	3.5	6.5	V
$I_{GSS}$	$V_{GS} = \pm 30\text{V}$ , $V_{DS} = 0\text{V}$		$\pm 200$	nA
$I_{DSS}$	$V_{DS} = V_{DSS}$ $V_{GS} = 0\text{V}$		50 3	$\mu\text{A}$ mA
$R_{DS(on)}$	$V_{GS} = 10\text{V}$ , $I_D = 0.5 \cdot I_{D25}$ , Note 1		260	mΩ

### Features

- Fast recovery diode
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
  - easy to drive and to protect

### Advantages

- Plus 264™ package for clip or spring mounting
- Space savings
- High power density

### Applications:

- High Voltage Switched-mode and resonant-mode power supplies
- High Voltage Pulse Power Applications
- High Voltage Discharge circuits in Lasers Pulsers, Spark Igniters, RF Generators
- High Voltage DC-DC converters
- High Voltage DC-AC inverters

Symbol	Test Conditions (T <sub>J</sub> = 25°C, unless otherwise specified)	Characteristic Values		
		Min.	Typ.	Max.
<b>g<sub>fs</sub></b>	V <sub>DS</sub> = 20V, I <sub>D</sub> = 0.5 • I <sub>D25</sub> , Note 1	20	32	S
<b>C<sub>iss</sub></b> <b>C<sub>oss</sub></b> <b>C<sub>rss</sub></b>	V <sub>GS</sub> = 0V, V <sub>DS</sub> = 25V, f = 1MHz	19	nF	
		1070	pF	
		46	pF	
<b>R<sub>GI</sub></b>	Gate Input Resistance	1.65		Ω
<b>t<sub>d(on)</sub></b> <b>t<sub>r</sub></b> <b>t<sub>d(off)</sub></b> <b>t<sub>f</sub></b>	Resistive Switching Times V <sub>GS</sub> = 10V, V <sub>DS</sub> = 0.5 • V <sub>DSS</sub> , I <sub>D</sub> = 0.5 • I <sub>D25</sub> R <sub>G</sub> = 1Ω (External)	53	ns	
		55	ns	
		110	ns	
		54	ns	
<b>Q<sub>g(on)</sub></b> <b>Q<sub>gs</sub></b> <b>Q<sub>gd</sub></b>	V <sub>GS</sub> = 10V, V <sub>DS</sub> = 0.5 • V <sub>DSS</sub> , I <sub>D</sub> = 0.5 • I <sub>D25</sub>	310	nC	
		95	nC	
		142	nC	
<b>R<sub>thJC</sub></b>		0.10	°C/W	
<b>R<sub>thCS</sub></b>		0.13	°C/W	


## Source-Drain Diode

Characteristic Values  
(T<sub>J</sub> = 25°C, unless otherwise specified)

Symbol	Test Conditions	Min.	Typ.	Max.
<b>I<sub>s</sub></b>	V <sub>GS</sub> = 0V		40	A
<b>I<sub>SM</sub></b>	Repetitive, pulse width limited by T <sub>JM</sub>		160	A
<b>V<sub>SD</sub></b>	I <sub>F</sub> = I <sub>s</sub> , V <sub>GS</sub> = 0V, Note 1		1.5	V
<b>t<sub>rr</sub></b> <b>Q<sub>RM</sub></b> <b>I<sub>RM</sub></b>	I <sub>F</sub> = 20A, -di/dt = 100A/μs V <sub>R</sub> = 100V, V <sub>GS</sub> = 0V	2.2	300	ns
		16	μC	
			A	

Note 1: Pulse test, t ≤ 300μs; duty cycle, d ≤ 2%.

## PLUS264™ (IXFB) Outline

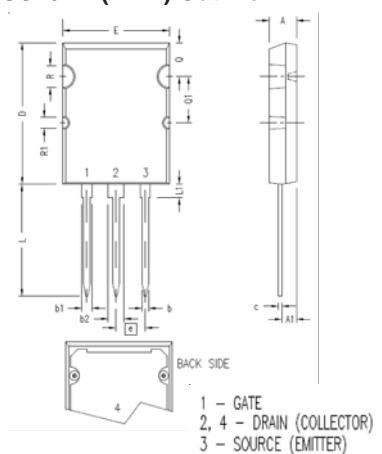


SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.185	.209	4.70	5.31
A1	.102	.118	2.59	3.00
b	.037	.055	0.94	1.40
b1	.087	.102	2.21	2.59
b2	.110	.126	2.79	3.20
c	.017	.029	0.43	0.74
D	1.007	1.047	25.58	26.59
E	.760	.799	19.30	20.29
e	.215 BSC		5.46 BSC	
L	.779	.842	19.79	21.39
L1	.087	.102	2.21	2.59
Q	.240	.256	6.10	6.50
Q1	.330	.346	8.38	8.79
ØR	.155	.187	3.94	4.75
ØR1	.085	.093	2.16	2.36


IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585 7,005,734 B2 7,157,338B2 4,850,072 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2 6,759,692 7,063,975 B2 4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6,771,478 B2 7,071,537


**Fig. 1. Output Characteristics  
@ 25°C**

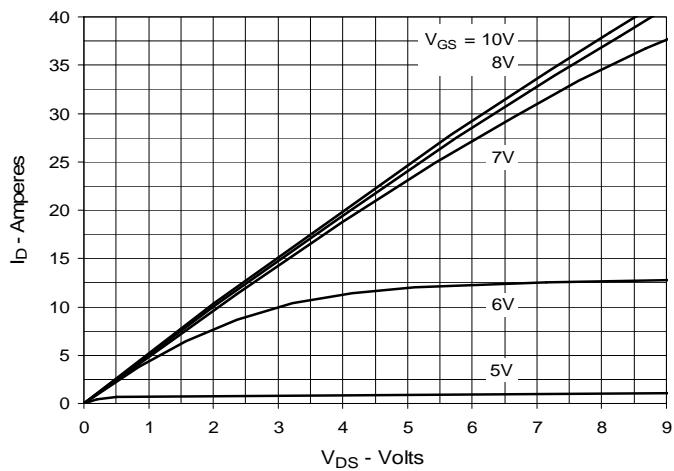


**Fig. 2. Extended Output Characteristics  
@ 25°C**

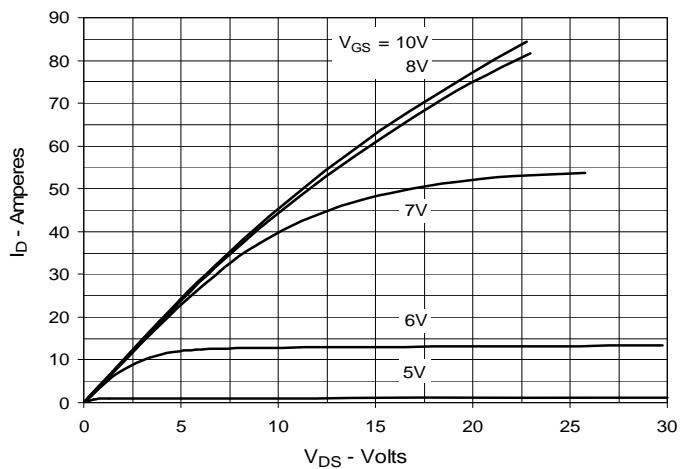


**Fig. 3. Output Characteristics  
@ 125°C**

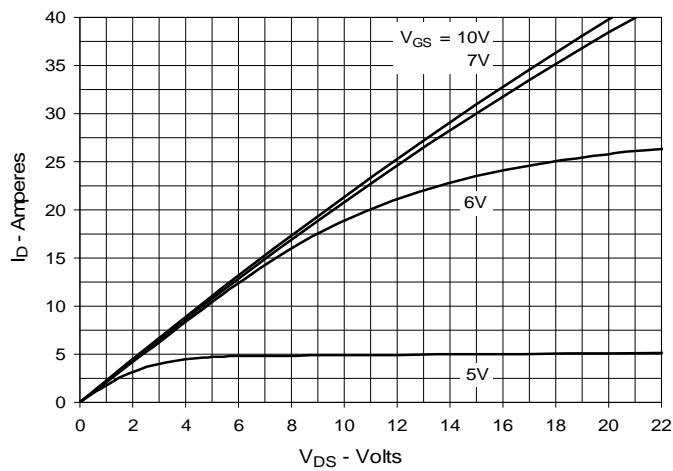


**Fig. 4.  $R_{DS(on)}$  Normalized to  $I_D = 20A$  Value  
vs. Junction Temperature**






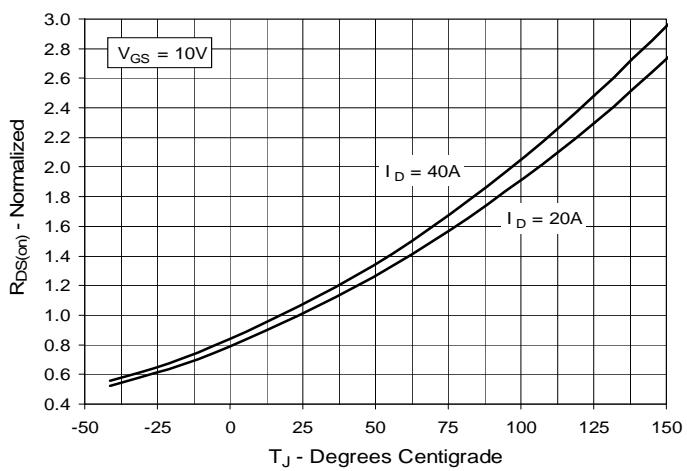


**Fig. 5.  $R_{DS(on)}$  Normalized to  $I_D = 20A$  Value  
vs. Drain Current**

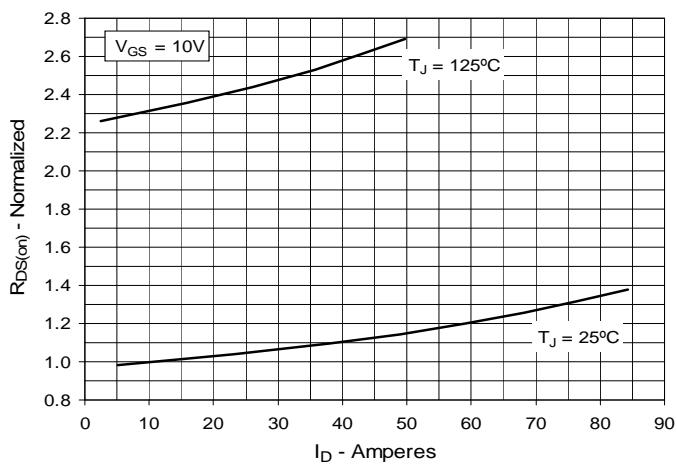

**Fig. 6. Maximum Drain Current vs.  
Case Temperature**

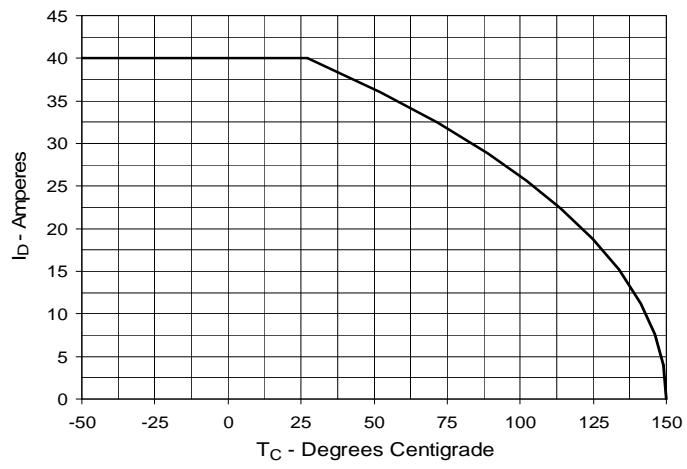

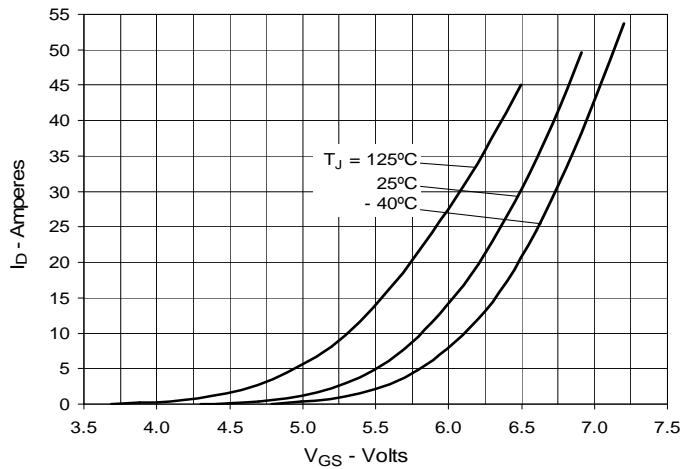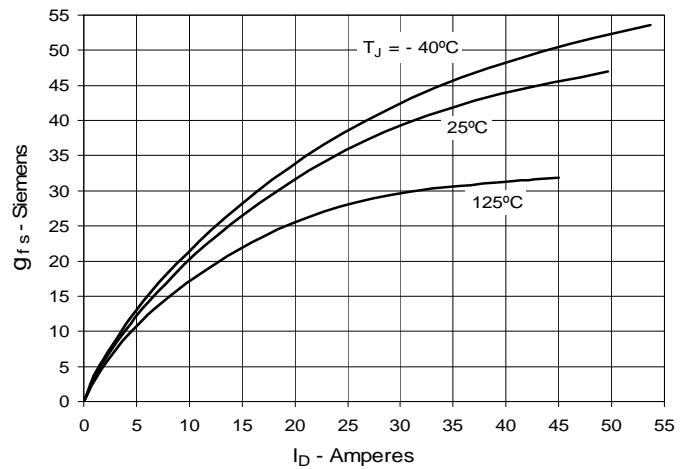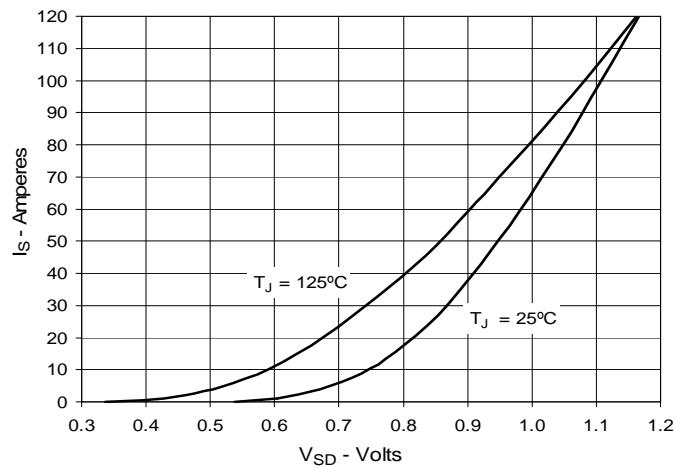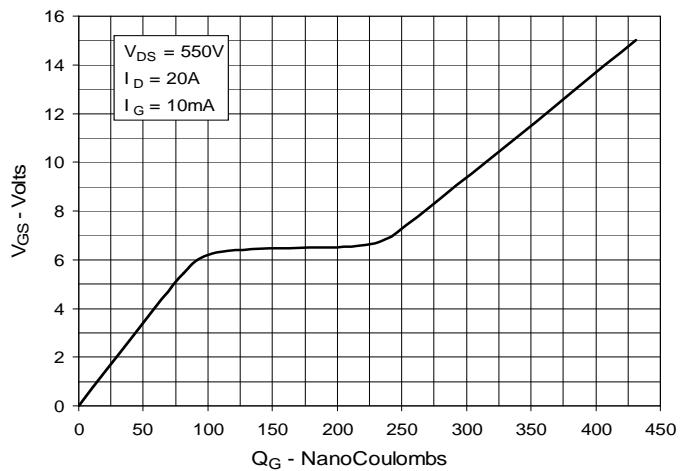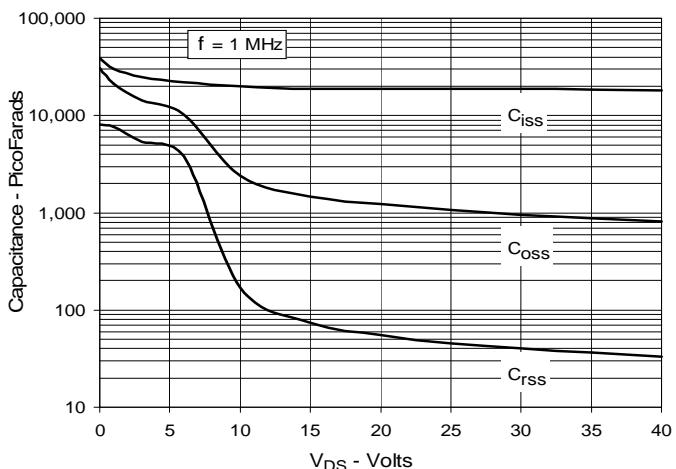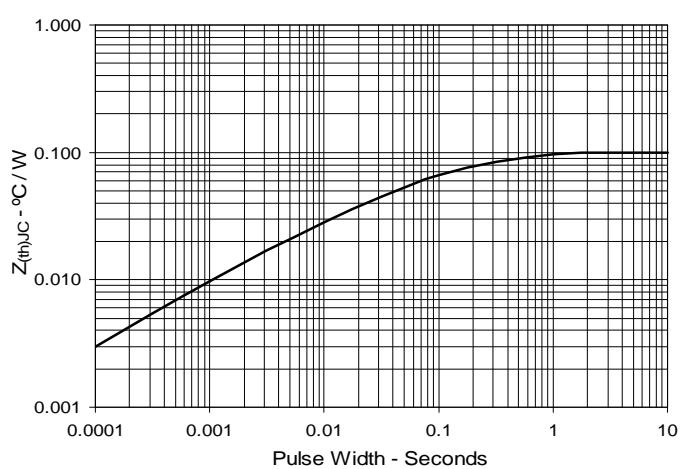**Fig. 7. Input Admittance****Fig. 8. Transconductance****Fig. 9. Forward Voltage Drop of Intrinsic Diode****Fig. 10. Gate Charge****Fig. 11. Capacitance****Fig. 12. Maximum Transient Thermal Impedance**



---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [IXYS](#) manufacturer:*

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [JANTX2N5237](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [TPCC8103,L1Q\(CM](#)  
[MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [SSM6J414TU,LF\(T](#) [751625C](#) [BUK954R8-60E](#) [NTE6400](#) [SQJ402EP-](#)  
[T1-GE3](#) [2SK2614\(TE16L1,Q\)](#) [2N7002KW-FAI](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [ECH8691-TL-W](#) [FCAB21350L1](#) [P85W28HP2F-](#)  
[7071](#) [DMN1053UCP4-7](#) [NTE221](#) [NTE222](#) [NTE2384](#) [NTE2903](#) [NTE2941](#) [NTE2945](#) [NTE2946](#) [NTE2960](#) [NTE2967](#) [NTE2969](#) [NTE2976](#)  
[NTE6400A](#) [NTE2910](#) [NTE2916](#) [NTE2956](#) [NTE2911](#) [DMN2080UCB4-7](#) [TK10A80W,S4X\(S](#) [SSM6P69NU,LF](#) [DMP22D4UFO-7B](#)  
[DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)