

NOTES1:

- UL Standard
- 1. Rated voltage/current : 600V / 60A
- 2. Torque value : M4 , 10.53Lb.in
- 3. Wire range : 20~6AWG

IEC Standard

- 1. Rated voltage/current : 1000V/65A
- 2. Torque value : M4 , 1.2N.m
- 3. Wire range : 2.5~16mm²

NOTES2:






- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 12.7mm, Poles : N=02~12P
- 3. Stripping length : 10~11mm
- 4. Withstanding voltage : AC3500V/1min
- 5. Operating temperature: -40°C~+105°C
- 6. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range		Over	Over	Over	Over	0.1/10
	mm	in mm					
Over 6	10	TO	Over 30	Over 60	Over 100	Over 150	0.1/10
TO 6	10	TO	TO 30	TO 60	TO 100	TO 150	<
TO 10	24	TO	TO 60	TO 100	TO 150	TO 150	<
TO 10	24	TO	TO 60	TO 100	TO 150	TO 150	<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

7. RoHS Compliance

Ordering Information

JL136HT-127 XX G 0 1

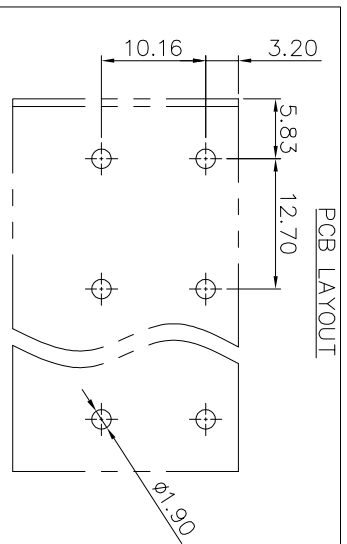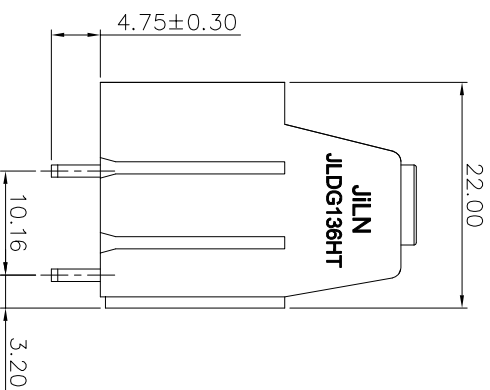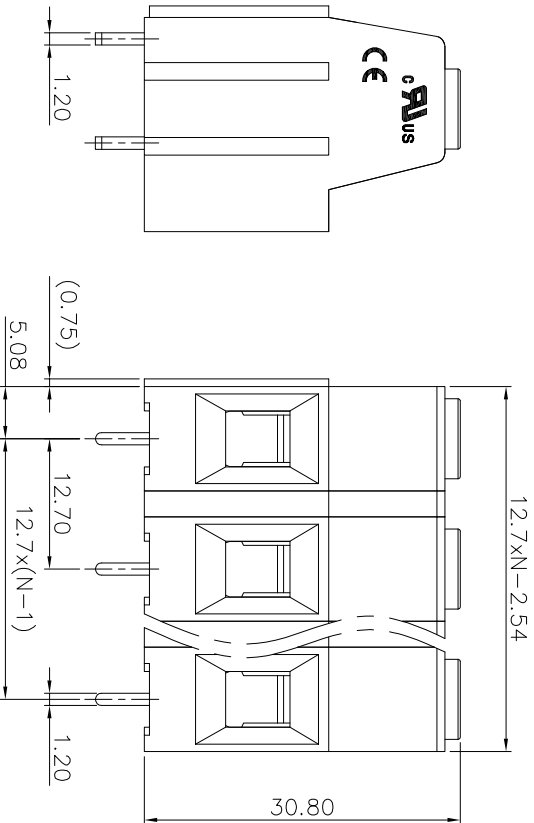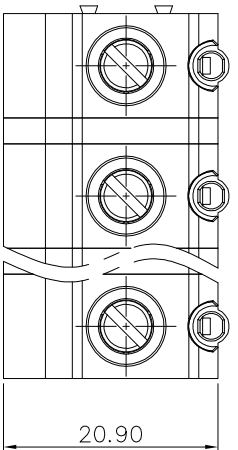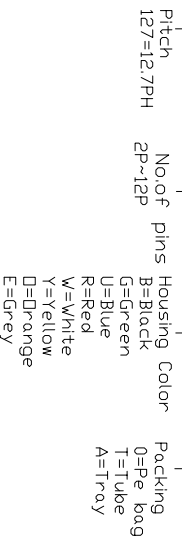

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.06.23

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	TITLE:
	UNIT	mm	A4	1/1		
CHECK	LICHAD LIU		SIZE	A4	JL136HT-127XXG01	JL136HT-127-XXP 螺钉式绿色/一字螺丝
APPROVE	YONGLIANG GAO		SHEET	1/1		
	PRD		PROJ			

JILIN 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD

JL136HT-127XXG01

JL136HT-127-XXP 螺钉式绿色/一字螺丝

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-163](#) [MI-254 \(35\)](#) [MPT-275](#) [ELM10110G](#) [BA311TU](#)
[BA411SU](#) [MV-254-D](#) [MV-255](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVEB-153](#) [1705142](#) [1-796689-8](#) [1841320000](#) [S451](#) [29.007](#) [29.116](#) [30.204](#)
[30.503](#) [30.756](#) [30.853](#) [9872-0-00-15-00-00-33-0](#) [996750](#) [1710052](#) [20020316-G071B01LF](#) [20020327-C061B01LF](#) [29590](#) [30.652](#) [30.710](#)
[30.754](#) [30.757](#) [32.058](#) [37.206](#) [37.208](#) [37.507](#) [37.558](#) [38331-5812](#) [38331-8018](#) [38540-1910](#) [39.002](#) [MBE-1517](#) [MBE-153](#)