

NOTES1:

UL Standard

1. Rated voltage/current : 150V / 5A

2. Withstanding voltage : AC1250V/1Min.

3. Wire range : 30~20AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	320V
Rate current(A)	6A

2. Wire range : 0.2~0.5mm<sup>2</sup>

NOTES2:

1. Dimension shall be interpreted per

ASME Y14.5-2009

2. Pitch : 2.54mm, Poles : N=04~48P

3. Stripping length : 7~8mm

4. Operating temperature: -40°C~+105°C

5. Undimensioned tolerances:


Pitch range in mm	Nominal dimension range in mm		Tolerance
	Over	Under	
6 TO 10	10 TO 10	30 TO 30	0.1/10
10 TO 24	24 TO 24	60 TO 60	<
		100 TO 100	
		150 TO 150	
±0.15/±0.20	±0.30/±0.30	±0.50/±0.50	±1.00/±1.30
			±2°

6. RoHS Compliance






### Ordering Information

JL15EDGKDHM-254 XX

B 0 1

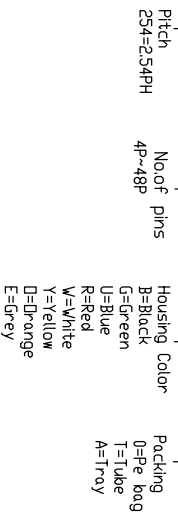

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE
A		NEW	22.3.3

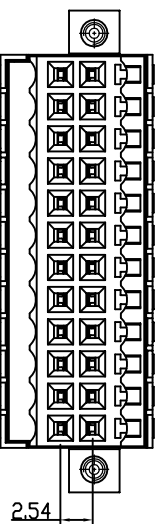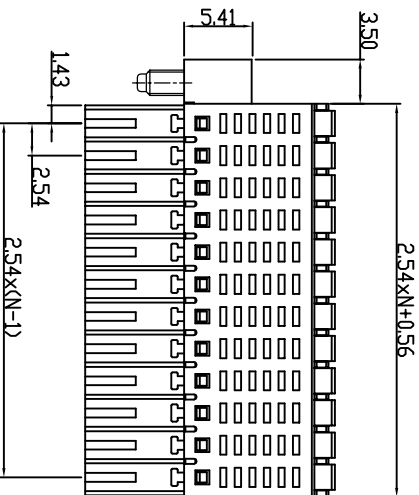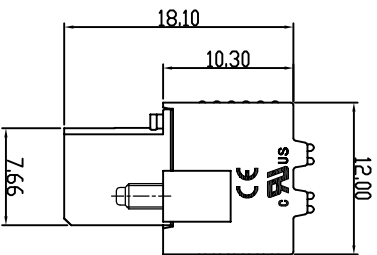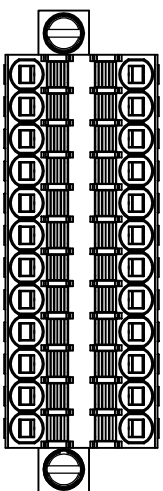

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	JILN® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD
	CHECK	LICHAO LIU	UNIT	mm		
APPROVE	YONGLIANG GAO	SIZE	A4	SHEET	1/1	TITLE:
		PRD.J.				JL15EDGKDHM-2.54-2XN 插拔式母座黑色带耳

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [JILN](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)  
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)  
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)  
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)  
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)