

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
AO		NEW		21.07.05

SPECIFICATIONS

Rated(额定参数): 300V,8A

Dielectric strength(抗电强度): AC1500V/1 Minute

Insulation Resistance(绝缘电阻):1000MΩ Min


Contact Resistance(接触电阻):20mΩ Max

Temp. range(操作温度): -40℃~+105℃

MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)

Contact(端子): Brass, Tin plating(黄铜镀锡)



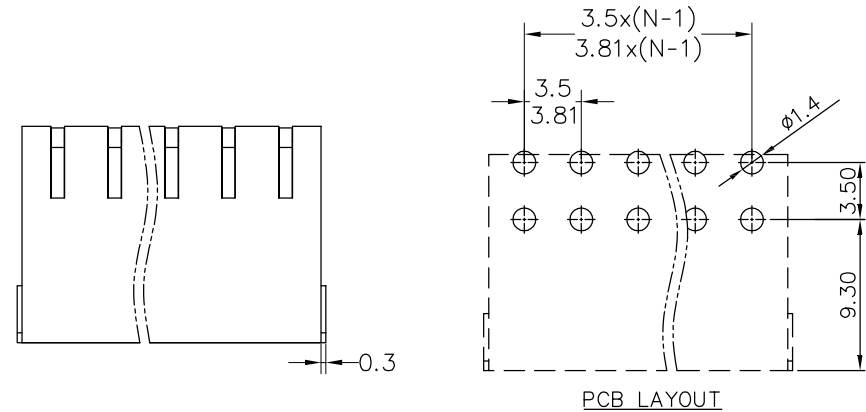


PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
T0	OVER 6	OVER 10	T0	OVER 30	OVER 60	OVER 100	OVER 150
6	TO 10	TO 24	30	TO 60	TO 100	TO 150	
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

Ordering Information

JL15EDGKNR - XXX XX X X 1

- Pitch
350=3.5PH
381=3.81PH
- No.of pins
4P~48P
- Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey
- Packing
O=Pe bag
A=Tray
T=Tube

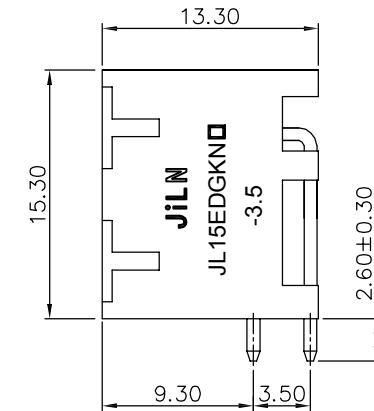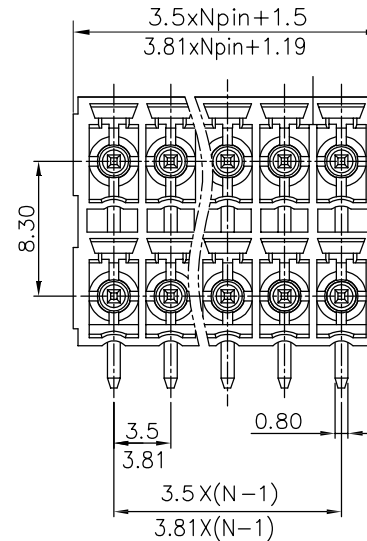

DRAW	SHUANGPING ZHENG	SCALE	FIT	东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD	
		UNIT	mm		
CHECK	LICHAO LIU	SIZE	A4		
		SHEET	1/1		
APPROVE	YONGLIANG GAO	PROJ.		PART NO.	JL15EDGKNR-XXXXXXXX1
				TITLE:	JL15EDGKNR-3.5(3.81)-2XNP插拔式公座/弯脚/绿色

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#) [ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1702246](#) [1705229](#) [1714537](#) [1717806](#) [1719600](#) [1728941](#) [1734692](#) [1734795](#) [1740291](#) [1740628](#) [1746952](#) [1750207](#) [1752865](#) [1754115](#) [1754144](#) [1756913](#) [1760051](#) [1760336](#) [1765111](#) [1776388](#) [1777701](#) [1783410](#) [1800227](#) [1801080](#) [1809474](#)