

NOTES1:

UL Standard

1. Rated voltage/current : 150V / 5A

2. Withstanding voltage : AC1250V/1Min.

3. Wire range : 30~20AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	320V
Rate current(A)	6A

2. Wire range : 0.2~0.5mm<sup>2</sup>

NOTES2:

1. Dimension shall be interpreted per

ASME Y14.5-2009

2. Pitch : 2.54mm, Poles : N=04~48P

3. Stripping length : 7~8mm

4. Operating temperature: -40°C~+105°C

5. Undimensioned tolerances:


Pitch range in mm	Nominal dimension range in mm		Tolerance
	Over	Under	
6 TO 10	10 TO 24	30 TO 60	0.1/10
±0.15	±0.20	±0.30	±0.50
		±0.70	±1.00
			±1.30
			±2°

6. RoHS Compliance






### Ordering Information

JL15EDGKDHM-254 XX

B 0 1

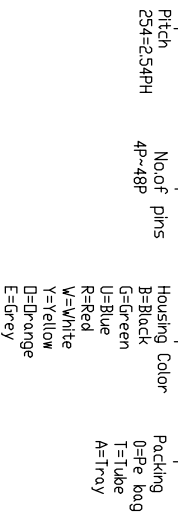

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE
A		NEW	22.3.3

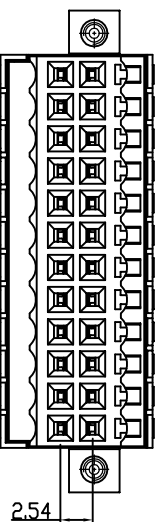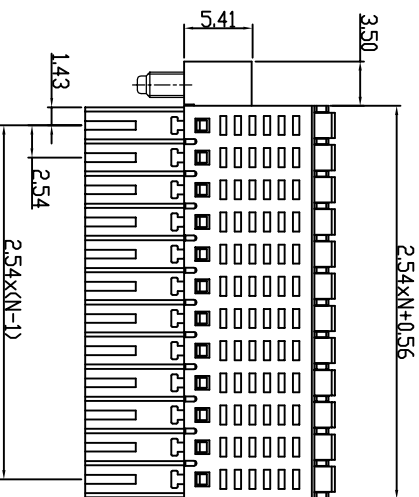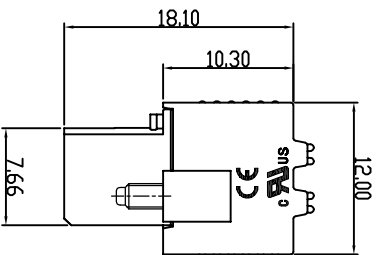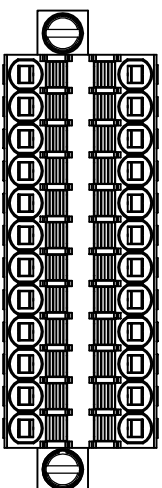

DRAW	SHUANGPING ZHENG		SCALE	FTT	PART NO.	JILN® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD
	CHECK	LICHAO LIU	UNIT	mm		
APPROVE	YONGLIANG GAO	SIZE	A4	SHEET	1/1	TITLE:
		PRD.J.				JL15EDGKDHM-2.54-2XN 插拔式母座黑色带耳

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [JILN](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#)  
[PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#)  
[ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1746952](#) [1760336](#) [1800272](#) [1809474](#) [1855000000](#) [19346](#) [1946309](#) [1950227](#) [1973592](#) [19892](#)  
[25.320.4053.1](#) [25.320.4553.9](#) [25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#)  
[SH06-3,81](#) [SH08-5,08](#) [SH08-5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#)