

NOTES1:

- UL Standard
- 1. Rated voltage/current : 300V / 70A
- 2. Withstanding voltage : AC1600V/1Min.
- 3. Wire range : 20~4AWG

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(kV)	8kV	8kV	8kV
Rate voltage(V)	1000V	1000V	1000V
Rate current(A)	76A		

2. Wire range : 0.2~16.0mm²

NOTES2:






- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Stripping length : 17~18mm
- 3. Operating temperature: -40°C~+105°C
- 4. Undimensioned tolerances:
- 5. RoHS Compliance

Pitch range in mm		Nominal dimension range in mm		Tolerance	
Over	TO	Over	TO	Over	TO
6	10	30	60	100	150
10	24	30	60	100	150
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00
				±1.30	±2*

Ordering Information

JL271R - 100 XX G 0 1

Pitch 100=10.0PH
 No. of pins 1P~24P
 Housing Color B=Black G=Green U=Blue R=Red W=White Y=Yellow D=Orange E=Grey
 Packing 0=Pe 1=Box T=Tube A=Tray

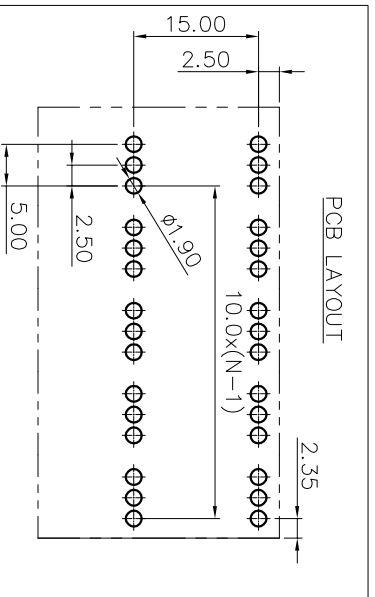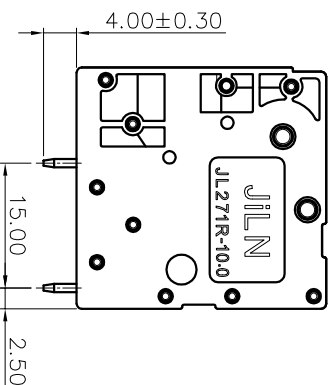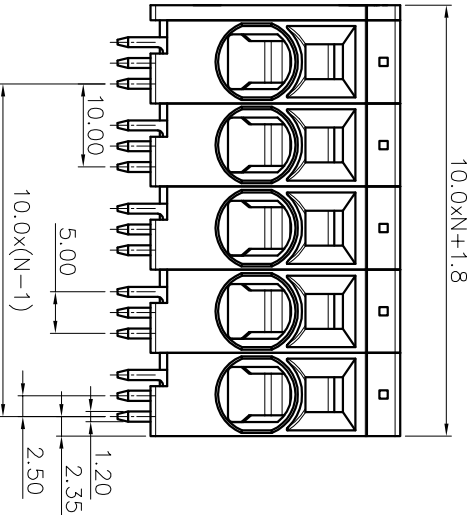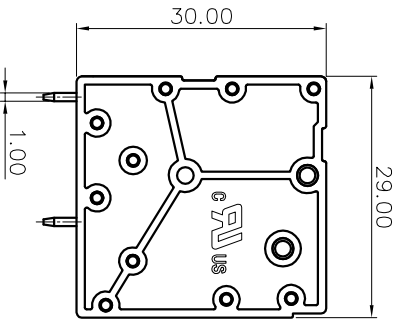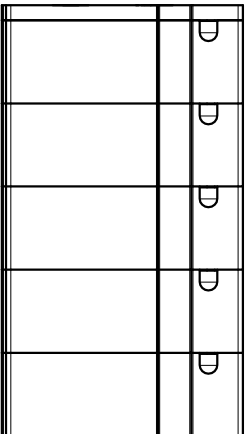

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE
A0		NEW	21.08.21

DRAW	SHUANGPING ZHENG	SCALE	FIT	<p>JLN 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD</p>
CHECK	LICHAD LIU	UNIT	mm	
APPROVE	YONGLIANG GAO	SIZE	A4	
		SHEET	1/1	PART NO.
		PRD		JL271R-100XXG01
				TITLE:
				JL271R-10.0-XXP弹簧式/弯脚/双排绿色

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-163](#) [MI-254 \(35\)](#) [MI-272](#) [MPT-275](#) [ELM10110G](#)
[BA311TU](#) [BA411SU](#) [MV-253/NCNOC](#) [MV-254-D](#) [MV-255](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVE-273](#) [MVEB-153](#) [1700096](#) [1705142](#)
[1712417](#) [1713088](#) [1745195](#) [1760594](#) [1-796689-8](#) [1-796692-6](#) [1800114](#) [20020314-C121B01LF](#) [20020316-G041B01LF](#) [KP03215000J0G](#)
[KP04215000J0G](#) [S451](#) [29.007](#) [29.116](#) [30.103](#) [30.106](#) [30.503](#) [30.608](#) [30.755](#) [30.756](#) [30.853](#) [9872-0-00-15-00-00-33-0](#) [996750](#) [1706303](#)
[1710052](#) [1712418](#)