

NOTES1:

- UL Standard
- 1. Rated voltage/current : 300V / 10A
- 2. Withstanding voltage : AC1600V/1Min.

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	4KV	4KV	4KV
Rate voltage(V)	630V	400V	250V
Rate current(A)	8A		

NOTES2:







- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 5.08mm, Poles : N=04~36P
- 3. Operating temperature: -40°C~+120°C
- 4. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range		Tolerance
	Over	In mm	
6	TO	30	0.1/10
10	TO	60	TO
24	TO	100	TO
30	TO	150	TO
60	TO	100	TO
150	TO	150	TO
±0.15/±0.20/±0.30/±0.30/±0.50/±0.70/±1.00/±1.30			±2°

5. RoHS Compliance

Ordering Information

JL2EDGVHC - 508 XX B 0 1

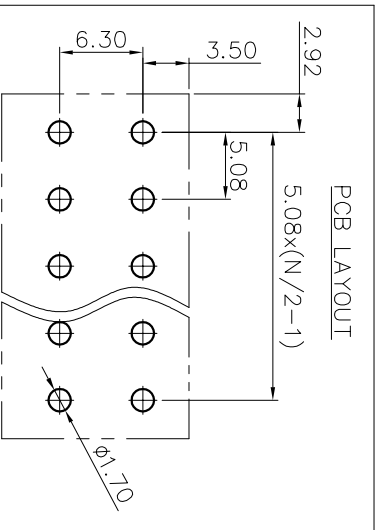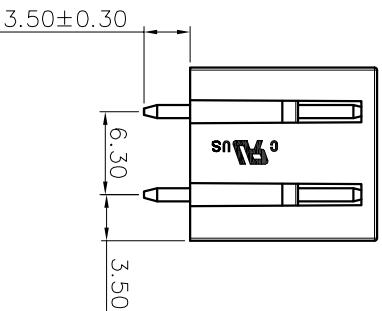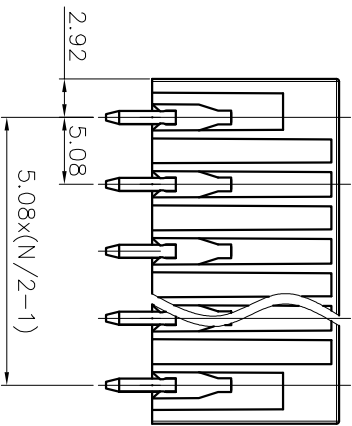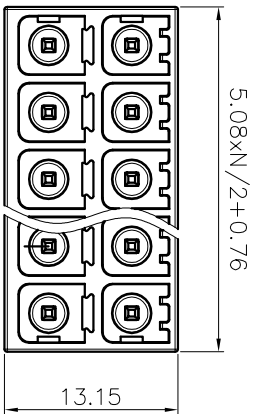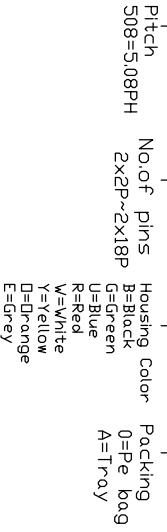

REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	JL2EDGVHC-508XXB01
	UNIT	mm				
CHECK	LICHAD LIU		SIZE	A4	TITLE:	JL2EDGVHC-THR-5.08-2XN 插拔式公座/直脚/黑色
	APPROVE	YONGLIANG GAO	SHEET	1/1		
PRD		PRD	DONGGUAN JINLING ELECTRONIC CO., LTD			

**JIN** 东莞市锦凌电子有限公司  
 DONGGUAN JINLING ELECTRONIC CO., LTD

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [JILN](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)  
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)  
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)  
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)  
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)