
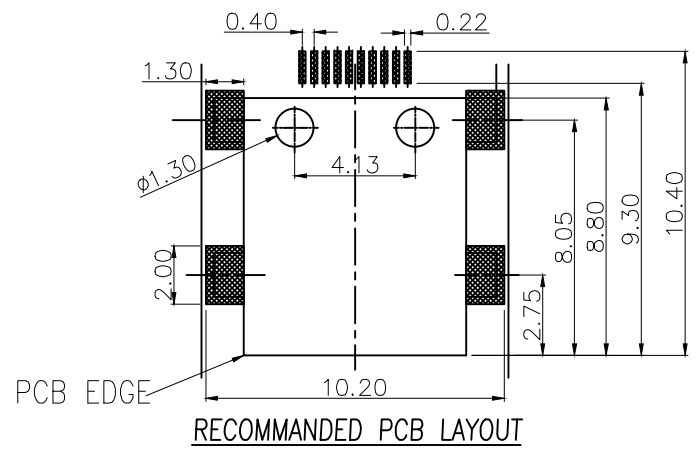
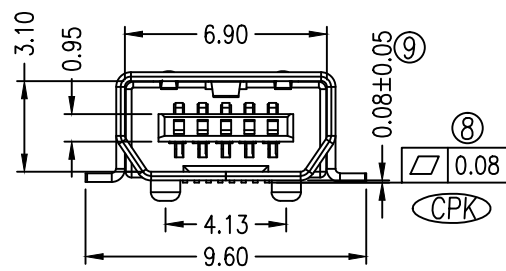
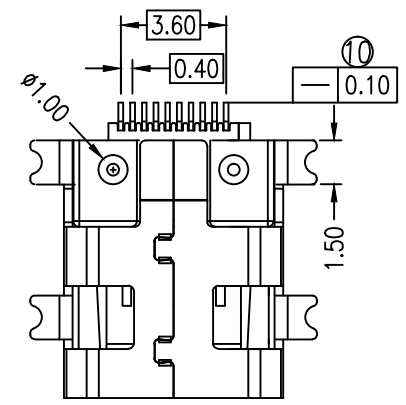
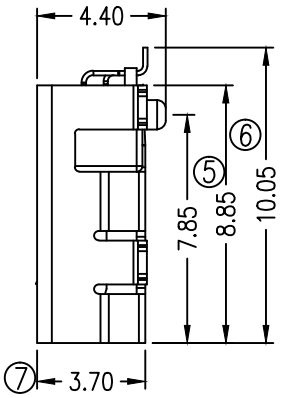
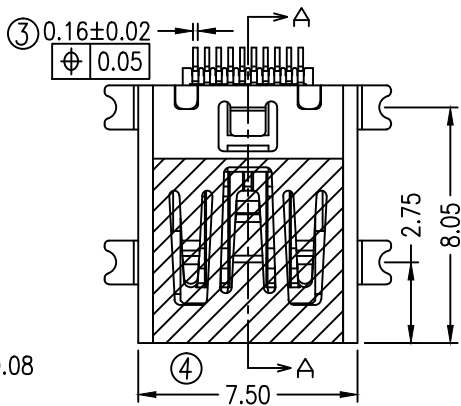
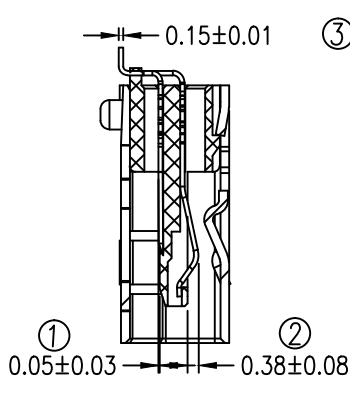


MAPX	MODIFICATION	DATE

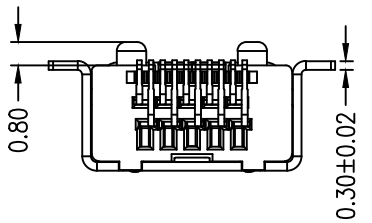

- 备注:
- 1.1 胶芯:LCP/PBT UL94V-0
 - 1.2 端子:C5210, 镀金1μ"或3μ"
 - 1.3 外壳:C2680, 镀雾锡80μ"以上或外壳镀全镍80μ"以上
2. 主要特性:
- 2.1 额定电流:1.0A
 - 2.2 接触阻抗:50mΩ MAX
 - 2.3 绝缘阻抗:100MΩ MIN 100V DC
 - 2.4 耐压测试:100V AC
 - 2.5 沾锡性:温度235±5℃, 时间5±0.5s
 - 2.6 整体插入力:3.57kgf MAX 整体拔出力:0.71kgf MIN
 - 2.7 使用寿命:5000次
 - 2.8 耐温性:烤箱测试:温度250±5℃, 时间2分钟
 - 2.9 工作环境:温度:-30℃~+80℃; 湿度:80% MAX
 - 3.0 圆圈标记尺寸表示重点检验尺寸, CPK值不小于1.33.

产品图 PRODUCT CHART DWG		深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	Gavin	制图料号 PRODUCT PART NO.	920-462A2021S10112
X.	±0.35	X.	±5.°	比例 SCALE	1:1	审核 CHKD	郭治富
.XX	±0.20	.XX	±1.°	日期 DATE	2014-06-09	核准 APPD	黄国荣
.XXX	±0.10	.XXX	±0.5°	产品名称 PRODUCT NO.	PHILIPS/MINI 10PIN母座四脚全贴有柱端子贴板/贴唛啦卷带		
				角法 VIEW		版本 VER	A0

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Connectors](#) category:

Click to view products by [Jing](#) manufacturer:

Other Similar products are found below :

[950](#) [MUSBD11135](#) [17-200721](#) [217450-1](#) [KMBVX-TH-5S-B30](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W30](#) [935](#) [957](#) [30-498-6](#) [SK-60A-2](#)
[1734082-1](#) [30-470](#) [30-489](#) [30-541](#) [A-USB A-2P-C](#) [MIKROE-1451](#) [USBFTVSCCG](#) [1-1734084-2](#) [10135326-001LF](#) [4198](#) [USB-A-D-VT](#)
[USB-A-S-RA-TSMT](#) [1310-1023-02](#) [690-024-633-031](#) [UB-20PMFP-LC7001](#) [17-200011](#) [UB-20AFMM-LL7A01](#) [1040870124](#) [CAP-](#)
[WCCMLPB1](#) [CAP-WCCMLPC1](#) [2274475-3](#) [UB-20BMFA-SL8001](#) [914-614A2025S10200](#) [USB3FTV7SAGF059](#) [ZX40-B-5S-1500-](#)
[STDA\(30\)](#) [GSB3116344HR](#) [USB3FTV2SAZNF459](#) [USB3FTV7SAZNF459](#) [U221-041N-1WVS62-F5D](#) [HYCW153-USBD05-500B](#)
[HYCW219-USBD05-075B](#) [HYCW148-USBD05-117B](#) [HYCW149-USBD05-740B](#) [HYCW204-USBD05-108B](#) [HYCW214-USBA04-113B](#)
[HYCW213-USBA04-113B](#) [UB-20AMFM-SL7A01](#) [KMMX-BSMT35S-1-B30TR](#) [2345986-1](#)